SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXX.—No 26. [NEW SERIES.] NEW YORK, JUNE 27, 1874. $3 per Annum IN ADVANCE

THE CLOCK TOWER AT DELHI, INDIA.

The city of Delhi is one of the oldest in all the provinces of Hindostan, and the sanguinary fighting under its walls in the days of the Sepoy mutiny, is still fresh in the memory of most of our readers. Since the establishment of a large depot of the East Indian Railway there, many improvements in the streets and buildings of the ancient city have been made. Of these additions, the most noticeable from a distance is the new clock tower, which stands in the center of the Chandnee Chowk, opposite the own hall. Of this a photograph is given in "Professional Papers of Indian Engineering," and from the London *Builder* we extract the accompanying engraving.

This building is erected on an appropriate site at the crossing of four streets, and stands 110 feet high, exclusive of the gilt vane and finial. The lowest story is about 20 feetsquare externally. The materials used in its construction are brick, red and yellow sandstone, and white marble. The capitals surmounting the main corner pillars are 4 feet 2 inches wide at top, and 4 feet 6 inches deep; they are carved out of solid blocks of white sandstone, and each of them weighs about two tuns.

The dials of the clock are sufficiently elevated to be visible from the East Indian Railway station, and from other prominent points in the city. The clock is constructed to work five bells, placed in the open canopy above it; these give out a different peal for each quarter, the largest bell striking the hours.

The building was completed in 18 months, at a cost, including clock and bells, of $14,000, the whole of which amount was provided from the municipal funds of Delhi.

The tower was designed and built by Mr. E. J. Martin, Executive Engineer of the Rajpootana State Railway.

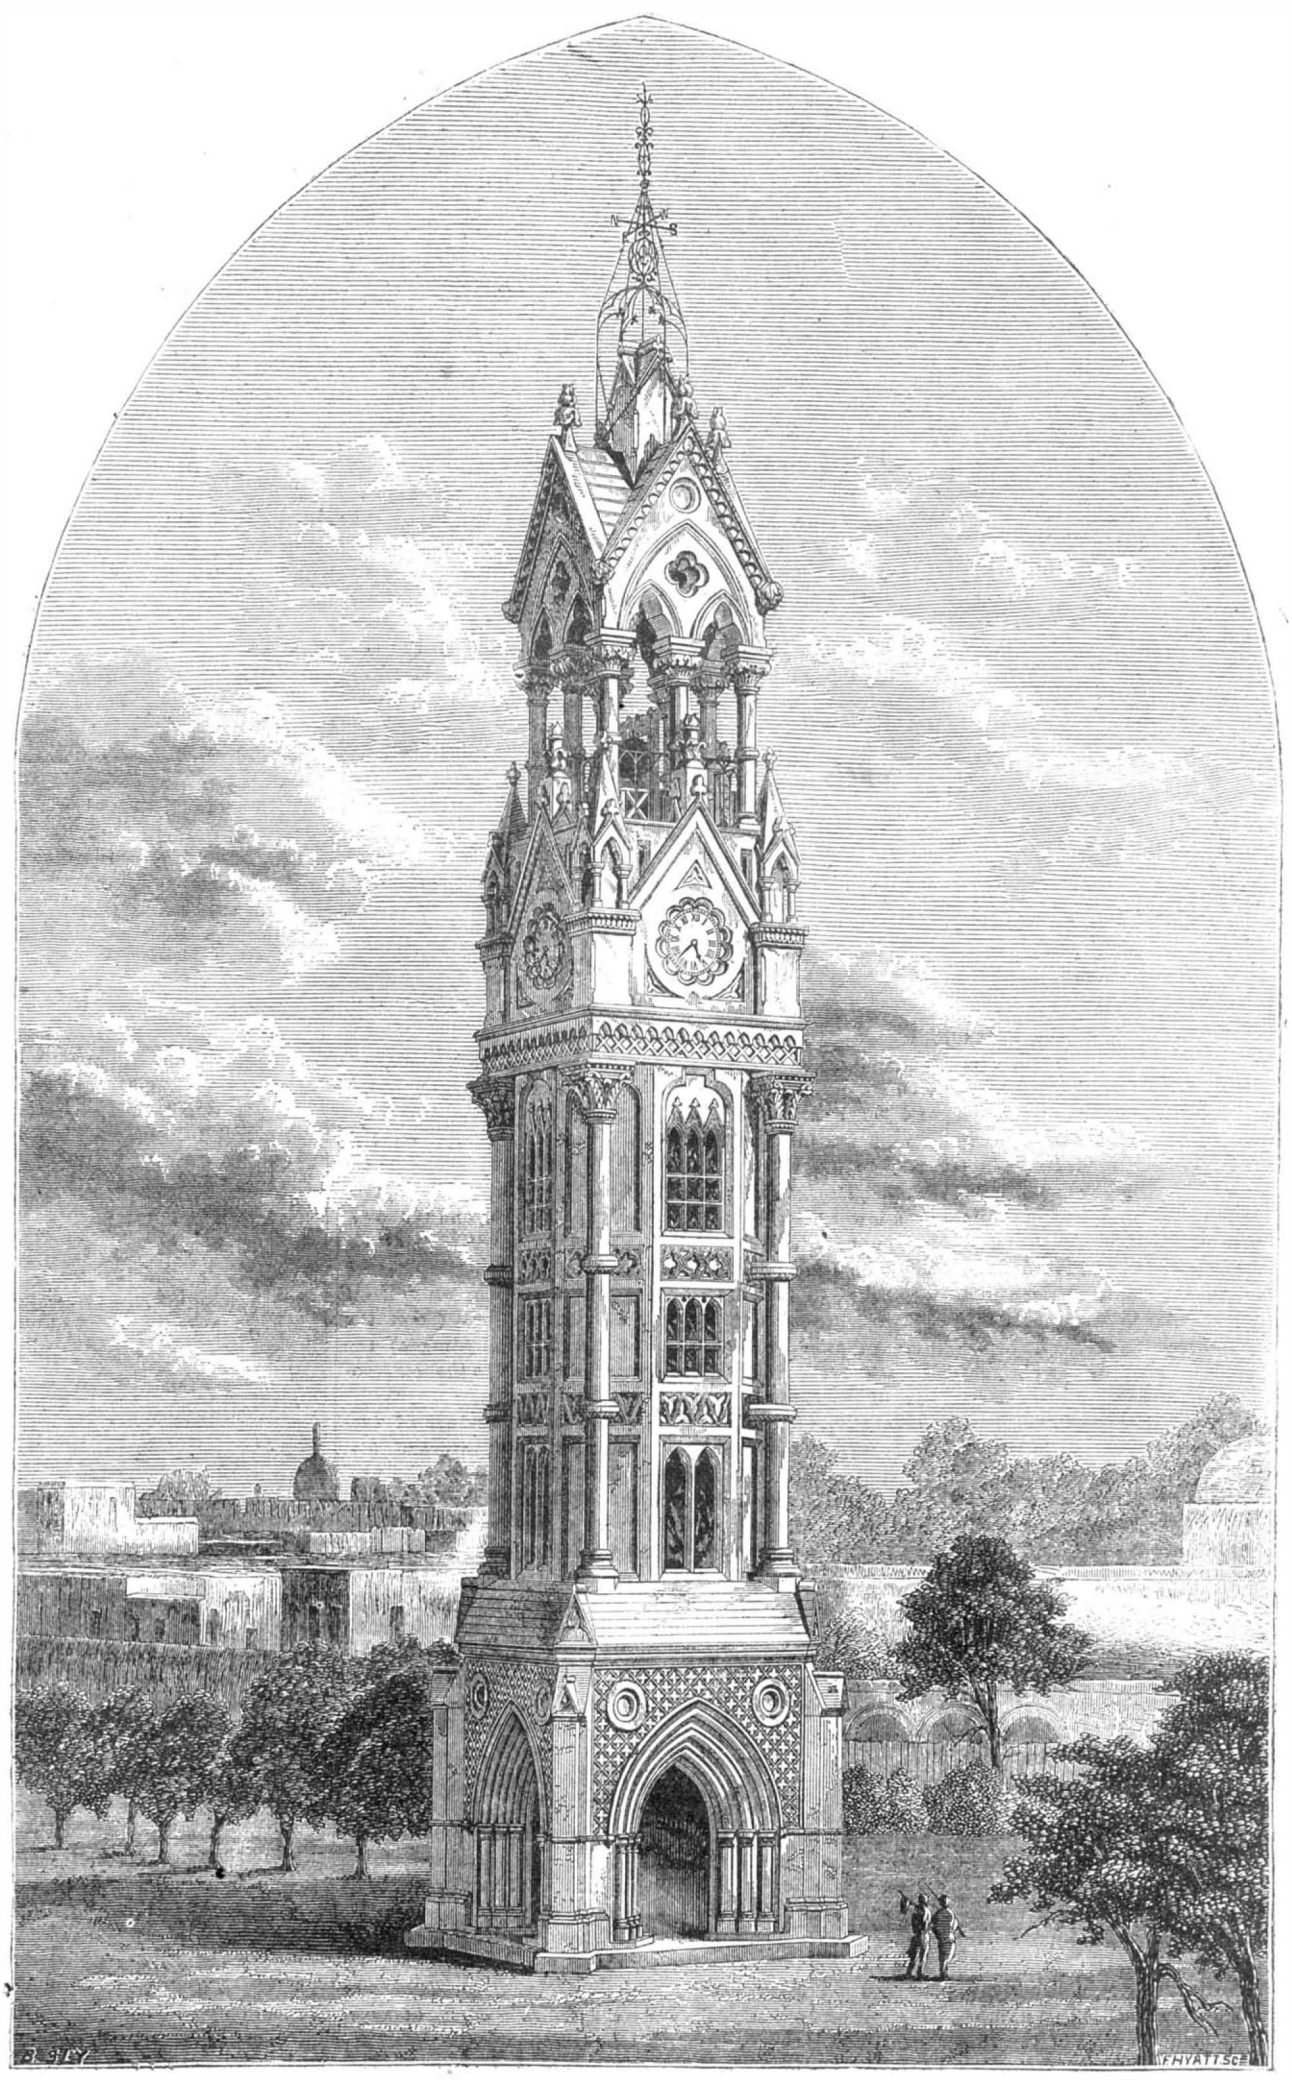

TOWER AND CLOCK AT DELHI, INDIA.

Railways without Switches, Turnouts, or Crossings.

Mr. Charles Jordan, Newport, England, proposes to stop one extensive source of railway accidents in what is certainly a thorough manner. He proposes to make the up and down main lines without the usual switches, turnouts, and crossings, the lines being continuous from end to end, and to work such road by transferring a train or trains at stations, or where shunting is necessary, or at junctions with other railways, from the main line to the adjacent siding, by lifting the train bodily from one line to the other. The lifting will only be an inch or two, and the hydraulic apparatus as now constructed will make nothing of the weight, while as to time, Mr. Jordan calculates that a few minutes will suffice to transfer a train from one road to another without disturbing a single passenger. The whole work of a station, as regards the hydraulic apparatus, may be done by one, or, at large stations, two leads. The time saved in switching will be very great, and the risk of collision reduced.

Reproduction of Photo-Negatives.

The sensitive compound I have hitherto employed for coating the plates is made up of dextrin, 4 grammes; ordinary white sugar, 5 grammes; bichromate of ammonia, 2 grammes; water, 100 grammes; glycerin, according to the condition of the atmosphere, 2 to 8 drops.

A new, well cleaned, patent plate is coated with the sensitive chromium solution; and after the superfluous liquid has been allowed to flow off at one of the corners, the plate is dried in the dark by being placed upon a lithographic stone or metal plate, a period of ten minutes being sufficient for the purpose, with a temperature of 120° to 160° Fah.

The film being perfectly dry, the plate, still warm, is put under a negative and printed in the shade for ten or fifteen minutes. As soon as it comes out of the printing frame the plate is again slightly warmed; the brush is dipped into the graphite and applied over the surface of the image, which should be just slightly visible. The application of the powder is carried on in a shaded corner of an ordinary room illuminated by daylight. You must not press hardly upon the film with the brush, but move the same over the surface as lightly as possible; nor will it do to hurry the operation.

In proportion as the film cools so the image appears. By carefully breathing or, better still, blowing upon the film, you will be able to accelerate the process, and when the picture has attained sufficient vigor you take off the superfluous graphite powder with a clean brush.

A normal collodion is now applied; such as I use is composed of: Alcohol, 500 parts; ether, 500 parts; pyroxyline, 15 to 20 parts.

When this film has set and hardened, the margins are cut round with a knife, and the plate put into a porcelain dish of cold water. In three minutes the picture will be free from the glass, and the film may be employed in this position or reversed with a soft brush, and taken out of the water adhering either to the same glass plate or to another. A gentle stream of water falling upon the film

© 1874 SCIENTIFIC AMERICAN, INC.

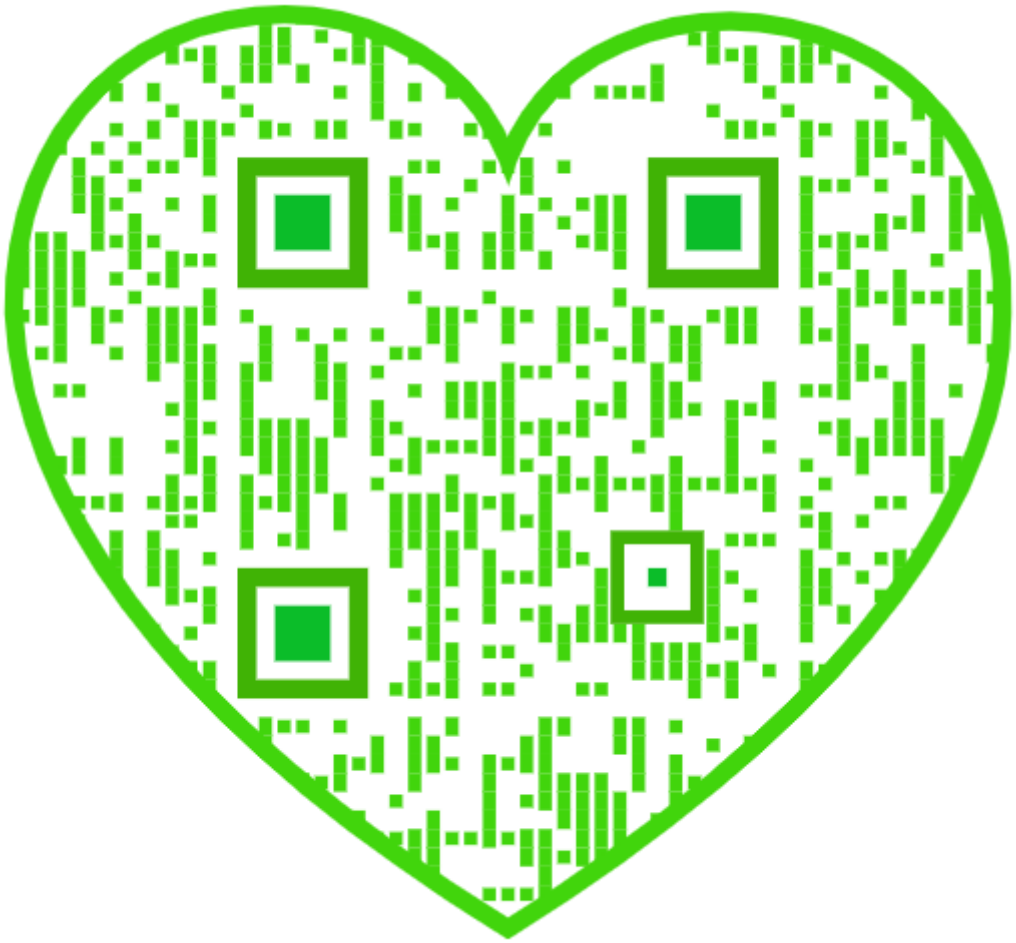

will remove any chromium salts still remaining in it, and will also press down the loose film uniformly upon the glass surface. Finally, the plate is allowed to dry in a perpendicular position. Further treatment of the plate with varnish follows as a matter of course.

The image upon the collodion film is very thin; but you need be under no apprehension of its tearing while in the water, when it may be easily manipulated. I have to do with films of this kind measuring three feet square.—*J. B. Obernetter.*

NEW ANTIDOTE FOR ARSENIC.—The only antidote for arsenic heretofore known has been hydrated peroxide of iron, which must be freshly made by mixing carbonate of soda or potash with a solution of either sulphate (copperas) of iron or muriate. A French experimenter, M. Carl, says that sugar mixed with magnesia serves as an antidote for arsenious acid.

IN Europe the multiplication of photo prints is extensively done by mechanical means, with printing ink, and the copies, equal or superior to silver prints, are supplied at half the cost of the latter.

Scientific American.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS.

One copy, one year..... $3 00
One copy, six months..... 1 50
CLUB RATES { Ten copies, one year, each $2 50..... 25 00
Over ten copies, same rate, each..... 2 50

VOLUME XXX, No. 26. [NEW SERIES.] *Twenty-ninth Year.*

NEW YORK, SATURDAY, JUNE 27, 1874.

Contents:

(Illustrated articles are marked with an asterisk.)

Air pressure and animal life*	403	Honey, adulterated	404
Anæsthesia	408	Horse *vs.* steam power	404
Answers to correspondents	410	Hydrant, improved*	406
Bedsteads, metallic	408	Hydrate of chloral poisoning	407
Beer	401	Iron, the welding of	406
Bleaching, improvements in	402	Lead poison, a preventive	408
Brass, burnishing	409	Milk from Switzerland	401
Brass for bedstead work	408	Mississippi river, the	404
Bridges, upright arched	408	Moles, to destroy	404
Business and personal	410	Mustard poultice	408
Charges for machine tools	404	New books and publications	409
Cholera	407	Ordnance, European	408
Civil engineers, convention of	404	Painting bedsteads, etc	408
Clock tower at Delhi, India*	399	Patent extension schemes	401
Comet, a new*	409	Patents, American and foreign	409
Diffusion in moist and dry air	401	Patents, official list of	410
Discovery, possible future	407	Photo-negatives, reproducing	399
Disinfectant, a good	408	Practical mechanism,—No. 3*	405
East river bridge anchorage	408	Problem, a curious*	400
Education of artisans, the	404	Railways without switches	399
End of Volume XXX	400	Railway, 3,500 miles by	409
Excavation for East river bridge	408	Respiration of plants	401
Gang saw table*	406	Starch, edible, sources of	401
Gardens at Caserta, Italy*	407	Tools, boring*	405
Gas lighting by electricity	401	Tool, spring*	405
Gas, prices of	404	Tools, side*	405
Gold fish, treatment of	402	Turning crank pins and journals*	402
Handsaws, Asiatic	402	Valerian in diabetes	407
High temperatures, how to attain	400	Vibrations of liquid surfaces	405
Hinge, improved safe*	406	Wind wheel and water elevator*	402

THE END OF VOLUME XXX.

The thirtieth volume of the present series of the SCIENTIFIC AMERICAN closes with the present issue, and, completed, joins its predecessors as another milestone, recording the progress made by mankind in the path of Science during the six months which have just passed. It is hardly necessary to point out that, in the pages now finished, it has been our endeavor, as it will be in those to come, to popularize scientific knowledge, and to make the same generally available to the masses; not aiming to supply information valuable alone to the engineer, to the chemist, or indeed exclusively to any profession or calling, but rather to glean from the whole broad field of Science and Art the richest sheaves of genius, and to present, winnowed therefrom, the kernels of wisdom, unmixed with the chaff of technicality and abstruseness. That such a course has met the public approval, our increasing circulation and the many letters of which we are constantly in receipt, offering us pleasant wishes of encouragement, are the best and most flattering evidence.

In glancing back over the contents of the past volume, we feel that we may confidently assert that in no other periodical now extant is there to be found a wider range of topics, treated in popular and readable form, the perusal of which will add more largely to the stock of valuable knowledge of any reader.

In the pages now closed we have presented 258 illustrated subjects, in many cases with not merely a single cut, but with a series of engravings. These embrace the most recent mechanical inventions, patented in this country and abroad—new steam engines and boilers—new weapons of war—new tools for every variety of industrial employment—new household implements—new machinery of every kind for especial purposes—illustrations of new scientific experiments—views of new buildings, bridges, and monuments—pictures of rare and new plants, fossils, and animals—of queer freaks of Nature in the animal and mineral world—lucid diagrams, explanatory of mathematical demonstrations, and new theories of natural phenomena.

As for miscellaneous information, we would refer the reader to the columns of fine type, attached to this number, which form the index, in order to gain an idea of the number and variety of the matters he has examined.

No great discoveries have been made during the past six months; but the progress of Science has been uniform, and stopping, as we now do, for a momentary breathing spell, we can look back and see a notable advance. Professor Thurston has sent us a large amount of important and valuable news regarding the behavior of metals under stress, and how to test them—facts of the liveliest interest to every engineer and mechanic. Professor Orton has continued his letters, telling us about the little known resources of Central South America. In astronomy, we have presented our monthly notes, regarding positions of planets, times of phenomena, etc.; abstracts of Professor Proctor's excellent lectures during his late visit to this country, and also an account of Professor Wright's discovery of the cause of the zodiacal light. We have also noted the discovery of new planets and comets, announced the donation of $700,000 by Mr. James Lick, of San Francisco, for a gigantic telescope, and illustrated an ingenious plan for the manufacture of that great instrument, the device of Mr. Daniel Chapman. Our abstracts from the proceedings of the British Association, the French Academy of Sciences, and our own scientific associations, have been very full and accurate, while reducing the new topics discussed for ready comprehension by every one. Engineering subjects have been so extensively treated that it is hardly possible to particularize. We have illustrated the 1,000 foot tower proposed for the coming centennial, called attention to new processes of tunnel boring, bridge building, and railroad construction, mentioned some important works in hydraulic engineering in the West, and, in a multiplicity of articles from the pens of expert writers, considered topics of a timely and lively interest to the profession. Chemical matters have received their full share of attention, and so also the important subjects of electricity and magnetism, in which notable advances have been made.

With the end of this volume many subscriptions expire, which we hope to see speedily renewed. In accordance with our rule, the paper is not sent after the subscribed-for term has expired; so that those who have failed to remark the notice on the wrappers of the copies received lately will be warned, by the cessation of our visits, that the time has come for them once more to express their appreciation of our efforts by sending us their substantial support.

HOW TO ATTAIN HIGH TEMPERATURES.

In his recent interesting address before the *Société des Ingénieurs Civils*, M. Jordan spoke at some length of the methods now adopted of attaining high temperatures in metallurgical operations, and of the bearing of chemical principles and recent discoveries upon the subject. The learned engineer speaks of the "duel," as he terms it, between the fire on the one hand and the refractory materials used in the arts on the other, and recognizes the serious difficulties which impede the effort to utilize high temperatures, when it is possible to attain them.

The Siemens regenerative furnace and its modifications represent the most successful means yet in general use for producing extremely high temperatures, and the difficulty most frequently met is that of finding fire brick or other material capable of withstanding the heat of the ignited gases We have known of instances in which the lining of steel-melting furnaces has been melted down like wax before this tremendous heat. Assuming, however, that we may expect to find sufficiently refractory materials to permit the utilization of still higher temperatures, the problem, to determine how to reach a higher limit, presents itself.

Under ordinary conditions, we cannot much exceed the temperature of a steel melting furnace, since dissociation occurs at a temperature supposed to be in the neighborhood of 4,500° Fah., for oxygen and hydrogen; consequently all combustion must be checked at some lower point on the scale, so long as no external force aids that of chemical affinity. The temperature of dissociation of carbonic acid is even lower than that for hydrogen and oxygen, and is shown to be not far from 2,500° Fah. Finally the presence of nitrogen in atmospheric air reduces the maximum temperature attainable, by furnishing a mass of gas which, while itself adding nothing to the supply of heat, abstracts (from the heat supplied by combustion of carbon and hydrogen) the larger amount required for its own elevation to the temperature of the furnace.

Elevation of the limit to increase of temperature of furnaces may be obtained by elevating the temperature of dissociation, and this, it has been found, may be done by producing combustion under pressures exceeding that of the atmosphere. Mr. Bessemer, the well known inventor who so nearly antedated our countryman Kelly in the invention of the pneumatic process of manufacture of iron and steel, which is generally known as the Bessemer process, has patented a method of increasing the pressure under which such operations occur. In the ordinary pneumatic process, this increase of pressure occurs to some extent in consequence of the small area of the opening by which the gases leave the converter, and it is stated that the pressure within the converter sometimes becomes double that of the external atmosphere. We may doubt if the increase ever becomes so great as this; yet there can be no doubt that it is sufficiently great to have an important influence in elevating the limit of dissociation and in giving the very high temperature which holds nearly pure iron within the converter in a condition of fluidity never observed elsewhere.

It is readily seen that the conclusions of M. Jordan, in the address to which we alluded above, are justified both by Science and by practical experience. He advises: The choice of a combustible which may be consumed in a bath of metal furnishing a non-volatile residue without injuring (*sans dénaturer*) the metal, and the adoption of a form of furnace which, heated by gas or otherwise, may be worked with an internal pressure of several atmospheres. He refers to the marvelous discoveries, recently made, relative to temperature and pressure on the surface of the sun and other heavenly bodies as affording illustrations of the possibilities in the direction of attaining high temperatures.

The problem presented is as interesting and attractive as it is important; and the inventor of new methods or of perfected apparatus, and the discoverer of more refractory materials than those now used, will aid greatly in its solution. Powerful intellects and ingenious minds are at work upon it; and we hope that our readers will be able to find in our columns evidence that the ingenuity which has made our people famous as a nation of mechanics, and the growth of Science which is gradually becoming so noticeable among us, have assisted to a valuable extent in effecting so important an advance in this direction. Any improvement or discovery which assists in the production and the economical application of high temperatures aids every branch of industry, and promotes our material welfare in an inconceivable number of ways.

A CURIOUS PROBLEM.

In our queries of last week's issue a correspondent, B. F. B., says: "There is a problem, which some one has found in a work published many years since, which is as follows 'A man, at the center of a circle 560 yards in diameter, starts in pursuit of a horse running around its circumference at the rate of one mile in two minutes; the man goes at the rate of one mile in six minutes, and runs directly toward the horse, in whatever direction he may be. Required the distance each will run before the man catches the horse, and what figure the man will describe.' I hardly think it admits of a solution under the above conditions; but were they reversed, that is, if the man were running at the rate of one mile in two minutes, and the horse one mile in six minutes, what would the answer be?"

This problem gives rise to an interesting investigation of a curve, which at first sight appears to be similar to the spiral of Archimedes, but on further examination proves to be totally different. The spiral of Archimedes is the track of a point which moves with uniform velocity along the radius from the center to the circumference, while, at the same time, the end of the radius travels round the circumference. In this problem, however, the point moving from the center does not move uniformly in the direction of the radius, but more and more obliquely toward a uniformly progressing point in the circumference, giving rise to an intricate application of the differential calculus, which finally proves that the man will never reach the horse, but that the curve described by him will, after three revolutions of the horse, be nearly identical with a circle, the circumference of which he will approach more and more, and of which the radius is one third of that in which the horse moves. The most interesting fact revealed, however, is that, if the velocity of the man is half that of the horse, he will, after two revolutions, be near the circumference of a circle of half the radius of the outer one; and when he moves with one fourth the velocity he will, after four revolutions, be very near a circle of one fourth the size, and so on.

In order not to burden our readers with extended calculations in the field of the higher algebra, we have solved the problem in the graphic method. In our first figure we hav

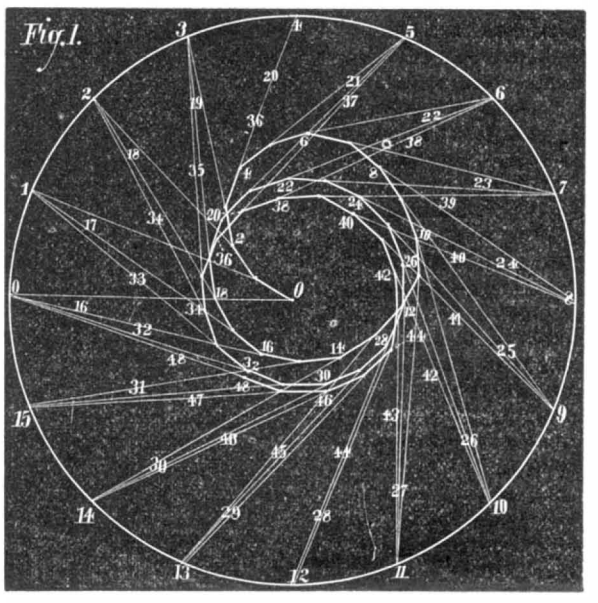

divided the circumference of the circle into sixteen equal parts, 0, 1, 2, 3, 4, etc., and taken one third of such a part and set it out on the radius from the center, 0 to 1. While the horse has moved along the circumference from 0 to 1, the man will have traveled from the center 0 to 1; while the horse is traveling from 1 to 2, the man will have traveled along the line 1, 2, 2; while the horse travels from 2 to 3, the man will travel in the direction 2, 3, 3, and so on; the only difference between our engraving and the reality being that the short lines representing the road traveled by the man will be slightly curved, instead of straight as we have represented them. By making these lines smaller, we may come sufficiently near to the reality, but the final result will not essentially differ. If the reader follows the different tracings for three revolutions, as represented here, he will see that finally the man will walk in a circle one third the size of that in which the horse moves, and will constantly see the horse in a direction tangential to the circle in which he walks; and therefore he never can reach it if he always moves directly toward the horse.

It is quite otherwise when the problem is reversed, and

© 1874 SCIENTIFIC AMERICAN, INC.

the man walks three times as fast as the horse. This is represented in Fig. 2, in which the track of the horse is divided into spaces each equal to $\frac{1}{48}$ part of the circumference. At A A, each part of the man's track is made equal to three times that length; and it is seen that, before the horse has accomplished three of these divisions, or one sixteenth of the circumference, the man will have overtaken him along the line, 0, 1, 2, 3. At B B, the case is represented that the man walks twice as fast as the horse; the engraving shows that,

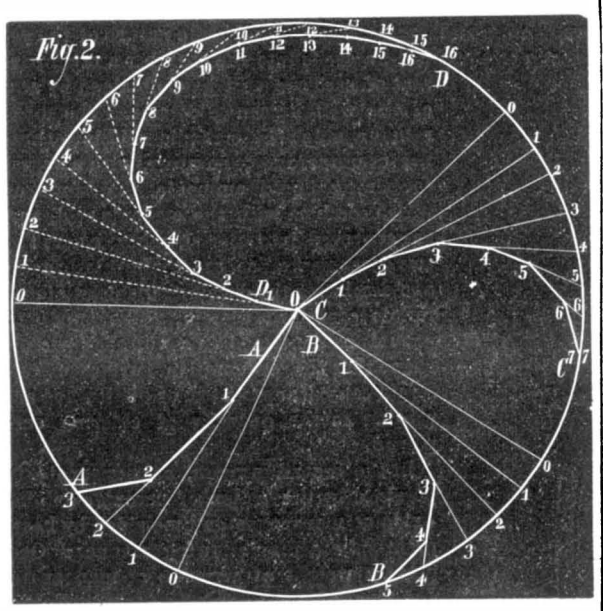

before the horse has accomplished five divisions or one tenth of the circumference, he will be overtaken. At C C, we represent the case that the man walks one and a half times as fast as the horse, the distances from the center, 0, 1, 2, 3, being one and a half times the corresponding $\frac{1}{48}$ part of the circumference. It is seen here that the horse will have been overtaken when he has passed over seven spaces, or $\frac{1}{7}$ of the circumference. Finally, at D D, we have represented the interesting case that the man walks exactly as fast as the horse; it is seen that, after going through sixteen spaces, or $\frac{1}{3}$ of the circumference, the man will move very nearly in the circumference, but always nearly one space ($\frac{1}{48}$ of the circumference) behind the horse, without being able ever to reach him. All that he then can do is to stop and let the horse overtake him.

SOURCES OF EDIBLE STARCH.

Besides the well known cereals, the number of plants producing starch, in root, stem, or fruit, in quantity sufficient to make their cultivation profitable, is very large. The number made use of in supplying the starches of commerce is comparatively small. Not more than a dozen contribute largely, and the excellence of these is clearly due in great measure to long cultivation. With the increasing demand for farinaceous foods, and the development of agriculture in tropical countries, where starch-producing plants chiefly flourish, many other starch yielders will doubtless be brought under cultivation, with as marked an improvement in their quality and productive value, we may expect, as the cereals have shown, or, more notably, the potato.

Possibly the effect upon the cultivators may be equally important. The cereals have been to a great extent both the occasion and the means of raising agriculture to its high position in temperate climes. In like manner the development of tropical and sub-tropical communities must come largely through habits of industry and thrift acquired in systematic agriculture, in which the starch-producing plants must play the same part the cereals have in colder regions.

The arrow root of the West Indies (*maranta arundinacea*) furnishes the standard quality and the common name for farinaceous products. Starch is starch the world over, and its composition is the same, whatever its source. The commercial starches are more or less impure, more or less flavored by the elements with which they are associated in Nature, and which are not perfectly eliminated in the process of manufacture. There is a difference also in the size of the granules, but this requires the microscope to determine. Arrow roots contain about 25 per cent of starch, which is extracted by a process of grinding, rasping and washing the pulp with water.

Owing to careful preparation and the purity of the water used, Bermuda arrow root has the name of being the purest and best in market; but an equally fine quality is now furnished from other localities, St. Vincent taking the lead both in quantity and quality. In Bermuda, as in most of the West India islands, the amount produced has greatly decreased of late years, the cultivation of early vegetables for our city markets offering larger profits.

In the Bahamas and other West India islands, and in Florida, a starch much resembling true arrowroot is obtained from the roots and stems of certain species of zamia. In Florida they are called *conti* roots, and the farina prepared from them *conti*. In the shops it is known as Florida arrow root. Another West Indian starch, called *tous le mois*, characterized by the relative coarseness of the granules, comes from several species of *canna*, one of which, *canna edulis*, has been largely introduced into Australia, where it yields an excellent quality of starch.

A great number of starch-yielding plants are employed for local use in South America; but for exportation the West Indian *maranta* and the native *manihots* are chiefly cultivated. There are two species of the latter (*manihot utilissima*), otherwise known as cassava root, being bitter and poisonous, the other (*m. api*) sweet, and largely used as an esculent, simply boiled. Both have been extensively introduced into other parts of tropic America, the East Indies, and the coast of Africa. The tubers of the bitter species, which is most extensively cultivated, sometimes attain the length of three feet and weigh thirty pounds, the milky juice being removed by pressing and the poisonous principle expelled by the action of heat. When heated in a moist state, the starch is partly cooked, forming small, hard, irregular masses, the tapioca of commerce. Like the potato, the manihot has developed a large number of varieties under cultivation, differing as potatoes do in quality and period of maturing, some coming to perfection in six months, others requiring a year or more. Farina of manihot, both in its crude state and made into thin cakes, is very largely eaten in Venezuela and Brazil, where the manihot is most cultivated, the single province of Santa Catharina having as many as 14,000 establishments for its manufacture.

The bulbous root of another poisonous South American plant, a climber, furnishes the starch called *jocatupé*, said to have important medicinal properties. Only a small quantity is produced.

The African arrow roots are of various origin. The Cape Verde islands export a considerable quantity, chiefly extracted from the Brazilian cassava root. St. Thomas, Angola, and Mozambique also yield a small amount. In Liberia, Sierra Leone, and other African colonies, especially Cape Colony and Natal, the true arrow root (maranta) has been largely introduced, and the prepared starch is beginning to be exported in noticeable quantity. Madagascar and the Mauritius likewise yield a small amount.

In 1840 the maranta was brought to Madras, and shortly afterwards to several other East Indian countries, where it thrives abundantly, developing in from twelve to fifteen months. With good irrigation, a year suffices to secure the maximum yield of starch, 16 per cent. More recently the same plant, together with the manihot, has been introduced into Ceylon, where after much persuasion the natives have been induced to cultivate them. Now the amount produced not only supplies the large local demand, but allows of considerable exportation.

What is known as *tikor*, or East Indian arrowroot, comes from the roots of a native plant, the narrow-leaved turmeric (*curcuma angustifolia*), which abounds in Ticor, Benares and Madras. A large part of the diet of the inhabitants of Trevancore is the starch of another plant of this genus, while still another answers the same purpose in Berar. In Chittagong, a wild ginger plant, growing everywhere in such profusion that it is almost a nuisance, has a root loaded with starch of a good quality. The supply of the root is inexhaustible; and with a little trouble in digging and preparation, it might be made to furnish a vast quantity of cheap and nutritious food. Other less known plants supply a large amount of starch for local use in India, notably a wild arrow root which grows in the jungles. The starch is of excellent quality. In many other parts, the natives also lay under tribute for the same purpose the young roots of the Palmyra palm, which are rich in starch. At Goa, a farina is prepared from the wild palm, and in Mysore from the sago palm of Assam (*carryota urens*) which yields a sago little if at all inferior to that of the true sago palms of the Malay countries. Less nutritious and palatable sagos are also obtained from the Talipat palm in Ceylon, and the *Phœnix farinifera* which grows on the Coromandel coast.

The most generous of starch producers, however, are the true sago palms, of which two species (*sagus konigii* and *sagus lævis*) are chiefly cultivated. Though most abundant in the eastern parts of the Malay archipelago, these palms are found throughout the Moluccas, New Guinea, Borneo and the neighboring islands, and as far north as the Philippines. The yield is immense, three trees affording more food matter than an acre of wheat, or six times as much as an acre of potatoes. As the trees propagate themselves by lateral shoots as well as by seeds, a sago plantation is perpetual. Wallace shows that ten days' labor or its equivalent in money will put a man in possession of sago cakes, the principal if not the sole food of the natives, enough for a year's subsistence. A single tree contains from twenty-five to thirty bushels of pith, which, with a little breaking-up, will yield from six to eight hundredweight of fine starch.

Upwards of 20,000 tuns of sago pith are annually converted into commercial sago by the Chinese at Singapore. The finer quality, known as pearl sago, is prepared in great quantities by the Chinese of Malacca, something like 250,000 hundredweights being sent therefrom to England alone. The manufacture of tapioca is also largely carried on at Singapore and at Penang, 75,000 hundredweight being sent to England annually from the former port, and 10,000 from the latter.

Japan sago is made from the pith of a fern palm (*cycas revoluta*), which yields a large quantity of sago-like starch.

Another starch-yielding plant, now extensively cultivated in the East, is the *tacca pinnatifida*, known throughout the South Sea islands as *pia*. The tuberous roots resemble potatoes, and are largely eaten in China and Cochin China. When raw, the tubers are intensely bitter and acrid, but these objectionable qualities are removed by cooking. The starch is of fine quality, much valued for invalids, and the yield is liberal—30 per cent. The South Sea tacca grows on high sandy banks near the sea, and yields a starch equal to Bermuda arrow root, when carefully prepared.

In other Pacific islands, certain species of aurum are also utilized for starch, the one most extensively cultivated (*aurum esculentum*) being known as *taro*. The natives of Tahiti distinguish thirteen varieties, doubtless the result of artificial selection. The tubers, which weigh from two to four pounds, each yield as much as 33 per cent of starch, combined with a blistering bitter principle which is destroyed by heat. Our familiar Indian turnip, with its acrid flavor belongs to the same family of plants.

Among the other starch-producing plants, extensively cultivated for food in tropical countries, and which are destined to add immensely to the food supply of colder climates, are yams, bread fruit, and bananas, including the variety known as plantains. The last fairly rival the sago palm in affording the maximum amount of food for the minimum amount of labor. The yield to the acre is, in bulk, forty-four times that of potatoes, and the proportion of starch is somewhat greater. The fruit is also richer in other elements of nutrition, so that the meal prepared by drying and grinding the plantain core resembles the flour of wheat in food value. It is easily digested, and in British Guiana is largely employed as food for children and invalids. The cost of preparing plantain meal cannot be great, and the supply might be unlimited. The proportion of starch is 17 per cent; in bread fruit it is about the same; in yams it rises to 25 per cent, but is hard to extract, owing to the woody character of the roots.

FAILURE OF PATENT EXTENSION SCHEMES.

We are glad to be able to state that the Senate Committee have agreed to report adversely upon the application of the sewing machine monopolists, for extensions of the Wilson, Aikens and Felthausen, and Wickersham sewing machine patents.

Adverse reports are also announced on the Tanner car brake, Rollin White pistol, and Atwood car wheel.

The following cases were deferred until next session: Norman Wiard's boiler attachment to prevent boiler explosions, and Butterworth's patent burglar-proof safe.

SCIENTIFIC AND PRACTICAL INFORMATION.

RESPIRATION OF PLANTS.

Vegetables, it is well known, exhale carbonic acid in the dark. M. Deherain states the curious fact that if a certain mass of vegetables thus acting be compared with a like mass of cold blooded animals, the exhalating energy will be found to be the same in both cases. This is another of those odd coincidences which seem to level the distinction between the two great organic kingdoms.

DIFFUSION BETWEEN MOIST AND DRY AIR THROUGH POROUS EARTH.

If a partition of porous earth separates two gases of different densities, an unequal diffusion takes place across the dividing body; the current of denser gas is more abundant than the other. M. Dufour has recently investigated the question as to what takes place when two masses of air of the same temperature, but containing unequal quantities of water, are substituted for the gas. He finds that there is still unequal diffusion, and that the most abundant current passes from the dry over to the moist atmosphere. This diffusion depends on the tensions of the aqueous vapor on the two sides of the porous partition.

GAS LIGHTING BY ELECTRICITY.

A new pneumatic gas lighting apparatus, now being introduced by Mr. Asahel Wheeler, of Boston, Mass., was recently tested at Providence, R. I., with satisfactory results. A current of compressed air is transmitted from a central engine to diaphragms at the burners, the moving of which turns on the gas, which is then lit by an electric spark. Forty lights were kindled and extinguished simultaneously with great rapidity. It is stated that by this device all the street lamps in a city may be lit by the movement of a single lever, at any certain point.

BEER.

The National Brewers' Congress recently met in Boston, Mass., and from the report of the proceedings, we glean the following statistics of the industry in this country. A steady increase in the consumption of beer of a million barrels per annum shows that, the more people drink, the more the appetite for drink increases. The capital invested is stated as $89,108,230; 1,113,853 acres of land are required to produce the barley, and are cultivated by 33,753 men; 40,099 acres are devoted to hop culture, requiring the work of 8,020 people; and 3,566 hands are employed in the malthouses.

MILK FROM SWITZERLAND.

The American process of condensing milk, invented by the late Gail Borden, of Texas, has been everywhere copied in Europe. Large works have been erected in Switzerland, and cows that feed in the finest Alpine pastures now furnish excellent milk for the city of New York. The agents are Messrs. Dudley & Co., 153 Chambers street.

EVERY condition in life has its advantages and its peculiar sources of happiness. It is not the houses and the streets which make the city, but those who frequent them; it is not the fields which make the country, but those who cultivate them. He is wisest who best utilizes his circumstances, or, to translate it, his surroundings; and happiness, if we deserve it, will find us, wherever our lot may be cast.

In the proposed railway up Mount Vesuvius, the engine, which is fixed at the bottom of the plane, sets two drums in motion, round which the metallic cable is wound, by means of which the trains are drawn up and let down simultaneously.

A railway train lately arrived at Algiers, Africa, from Oran six hours behind time, the cause of the delay being that the rails were covered with a thick layer of locusts.

© 1874 SCIENTIFIC AMERICAN, INC.

IMPROVED WIND WHEEL AND WATER ELEVATOR.

Irregularity of motion, oscillation of turning table and vane, unavoidable use of small wheels on the main shaft preventing the transmission of quick motion when the same is needed, liability to get out of repair, and excessive cost. are objections to the employment of wind power, which the inventor of the device herewith illustrated claims to have overcome. The fans are centrally pivoted to two circles, which constitute portions of the frame of the wheel, and the bearings for the main axle rest upon stationary posts. A is a weight attached to a rod which traverses the shaft and is pivoted in a sleeve which slides back and forth between the arms. To the sleeve are attached jointed rods which are connected with guides, at B, so that, as the sleeve passes back and forth, the rods are given an inward and outward motion. Near the outer extremity of the latter are placed systems of small rods, C, jointed together to form parallelograms, operating on the principle of lazy tongs. From each of these extend three arms, one passing through the outer circle and carrying a ball, D; the second pivoted to the inside corner of one fan, at E, and the third similarly secured to the outer corner of the other adjacent fan, at F. The rods, G, connect these fans with those next to them, so that one shifting rod, with its lazy tongs, governs a set of four fans, which move through the same space at the same time.

In order to stop the windmill, the weight, A, is removed, when the balls tend to bring the portions of the lazy tongs to a position at right angles with the shifting rods, and hence the fans, to a right angle with the wheel. The fans, it is stated, move with equal facility in strong or light winds, no greater force being required to operate them than is necessary to overcome the friction of the different bearings. The power is, besides, through its application diagonally across from the inside corner of one fan to the outside corner of the other, transmitted to the best advantage. For large wheels, we are informed, hydraulic pressure is used to equalize the motion.

The water elevator consists of a series of buckets, H, which are pivoted, a little above their centers, between every two links of an endless chain or band which passes over two pulleys, one at the bottom and the other above the well. The bottom of the bucket swings in, and a projection thereon takes against the upper shaft as the vessel is carried over. This causes the latter to empty, with little splash, into the conduit provided, in which the water is conducted to any desired point.

It will be seen that the construction of the apparatus denotes considerable strength, as it is built on the plan of a wagon wheel, the fans serving as spokes. The inventor states that it is almost impossible to blow it to pieces.

The machine, combined with a pump and also with the elevator described, was exhibited at the Kansas State Fair, last fall, and received five first premiums, and also commendatory notice from the State Board of Agriculture.

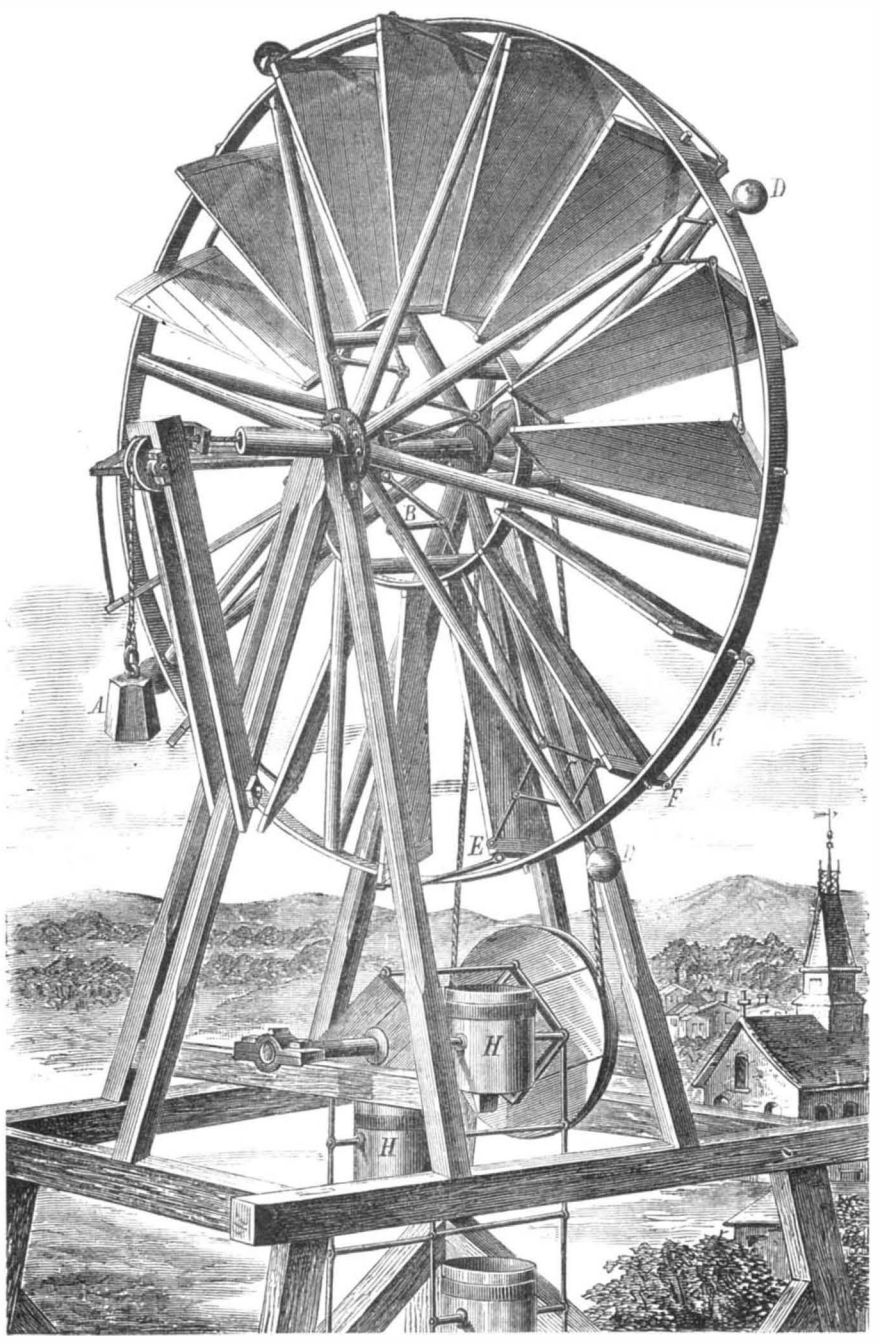

IMPROVED WIND WHEEL AND WATER ELEVATOR.

Patented March 17, 1874. For information pertaining to manufacturing or royalty, or relating to purchase of wheels, address the inventor, Mr. J. N. Dietz, Salina, Saline county, Kansas.

MACHINE FOR TURNING CRANK PINS AND JOURNALS OF LOCOMOTIVES.

In this apparatus, for the engraving of which we are indebted to the Belgian *Bulletin du Musée*, the tool is fixed immediately against the pin or journal by four strong screw bolts, *a*, and is set in motion by the driving pulley, *f*, to which a belt is carried; centering on one side is effected by the point, *b*, and on the other, by the ring of the pin and the annular piece, *c*.

The tool, *d*, which acts on the cylindrical surface, is placed on the circumference of a tool carrier, *e*, which is rotated by the pulley, *f*, through the cog wheel, *g*. The advance motion of the tool, parallel to the axis of the pin, is gained by means of a screw, *h*, at the rear extremity of which is fixed a wheel, *m*. Each time that this wheel strikes a shoulder, *i*, the screw turns, and the support, *k*, advances with the tool. The working of the apparatus is readily understood from the illustration.

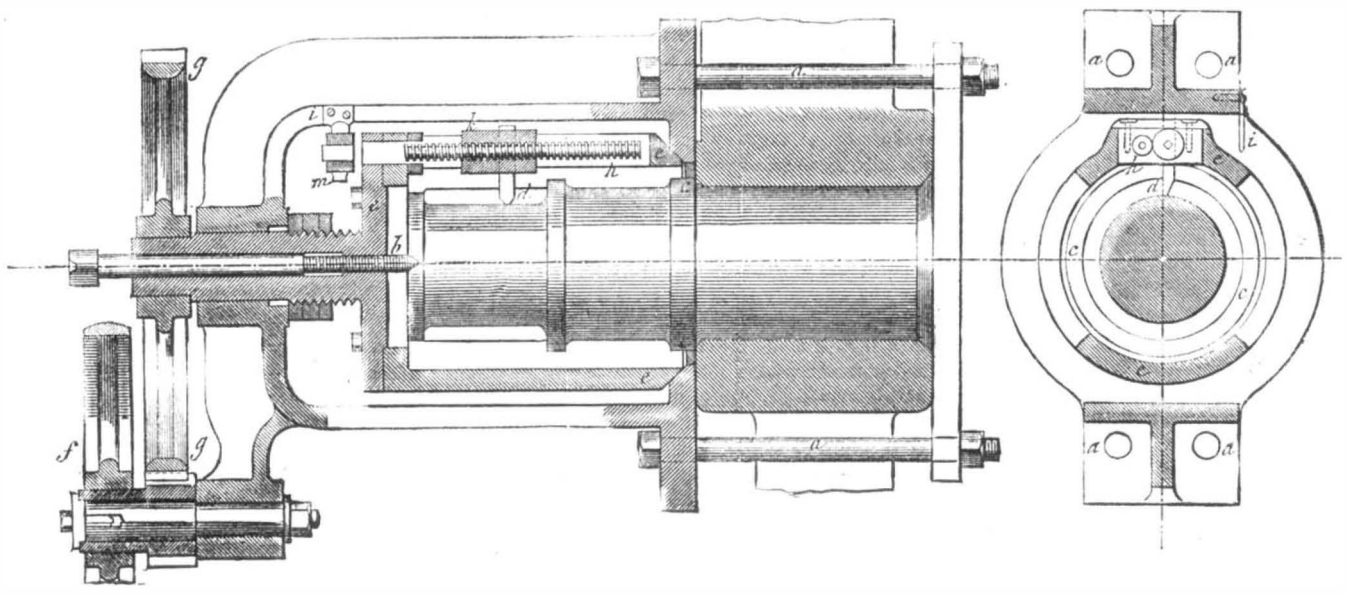

MACHINE FOR TURNING CRANK PINS AND JOURNALS OF LOCOMOTIVES.

Treatment of Gold Fish.

Seth Green says this as to the proper care and treatment of gold fish: Never take the fish in your hand. If the aquarium needs cleaning, make a net of mosquito netting and take the fish out in it. There are many gold fish killed by handling. Keep your aquarium clean, so that the water looks as clear as crystal. Watch the fish a little, and you will find out when they are all right. Feed them all they will eat and anything they will eat—worms, meat, fish wafer, or fish spawn. Take great care that you take all that they do not eat out of the aquarium; any decayed meat or vegetable in water has the same smell to fish that it has to you in air. If your gold fish die, it is attributable, as a rule, to one of three causes—handling, starvation, or bad water.

Asiatic Handsaws.

Handsaws in America and England have the teeth pointed from the handle, while in Asiatic countries and in Greece they are made with teeth pointed the other way. The latter must be operated by pulling them, the former by pushing. In delicate work, and where very fine small saws are used, the Eastern saw is the best. The Orientals differ from us in setting the teeth of the saw also. They turn a group of a dozen one way, and the next group the other, while we alternate, one on one side, the next on the other.

Improvements in Bleaching.

M. Pierre Isidore David, a French chemist, has invented the following processes:

Chlorine in the gaseous state is produced in a closed receptacle by one of the ordinary methods, for example, by the action of an acid on chloride of lime diluted with water, and is conveyed by a tube into a chamber containing the articles to be bleached, the sides of such chamber being constructed of a transparent material in order to permit the entrance of light, which assists considerably the process of decolorization. After an interval, varying with the nature of the articles to be bleached, he sends into the chamber a rapid current of carbonic acid gas, obtained by any of the well known processes. The apparatus in which the carbonic acid is generated communicates, however, with a vessel containing liquid ammonia, the fumes of which combine with the carbonic acid, and are conveyed into the chamber, where the two gases neutralize the hydrochloric acid, and accelerate the decolorization of the materials contained therein. The ammonia should be contained in a vessel of such a shape that the evaporation surface of the liquid can be augmented or diminished according to the quantity of chlorine employed.

In the second process, permanganate is obtained by the action of peroxide or binoxide of manganese on lime aided by heat, preferably in the following manner: One part by weight of peroxide of manganese and three parts of quick lime in powder are mixed together and submitted to a red heat for about three hours. When the heat has been continued for one hour, however, a rapid current of carbonic acid is passed through the mixture and continued till the completion of the process, the object being to superoxidize the compound. The permanganate of lime thus prepared is placed in a closed receptacle, which communicates by a tube with the bleaching chamber, commercial sulphuric acid is gradually added, and "ozonized oxygen" is evolved. In order to accelerate the evolution of this gas, the inventor adds a vegetable acid in quantity equal to the oil of vitriol, acetic acid being preferably used.

In the third process, M. David employs phosphorus and acetic acid. The production of ozone by means of phosphorus in a moist atmosphere is well known, but the quantity thus obtained is very small. By causing air which has been previously forced through acetic acid to bubble through the water containing the phosphorus, the patentee has discovered that the quantity of ozone is considerably increased. The ozone is conveyed to the bleaching chamber in the same manner as before described, the air being forced through the liquids by means of a fan or any other of the well known methods of obtaining a current either by pressure or exhaust.

The fourth process consists in the use of chalk, alum, and sulphuric acid. A saturated solution of alum is prepared at a temperature of 140-160° Fah., into which powdered chalk is thrown, about equal in weight to the alum employed; sulphuric acid is then added, and the gas evolved is conveyed by a tube to the bleaching chamber, where it effects the desired object.

It will be seen that in three of the four processes chlorine is dispensed with, and the formation of hydrochloric acid avoided. When the articles are removed from the bleaching chamber, it is desirable to expose them for a time to the action of the atmosphere in order to remove the characteristic smell of ozone. These processes are claimed by M. David to be applicable to the decolorization of raw or worked materials, especially those which from their shape or nature do not admit of immersion in liquid; they are also specially adapted to the bleaching of books, papers, and engravings. Oils and fatty matters may be decolorized by them; alcoholic liquids may be "improved" or "aged," as it is called, by the oxidizing properties of the ozone; fermentation may be arrested and unpleasant flavors removed; and they may be speedily converted into vinegar or acetic acid. M. David asserts that his processes will be found more economical than those at present adopted.

© 1874 SCIENTIFIC AMERICAN, INC.

EFFECTS OF AIR PRESSURE ON ANIMAL LIFE.

A series of brilliant and remarkable experiments have recently been conducted in France by M. P. Bert, having for their object the determination of the influence of changes in barometric pressure, either augmentations or diminutions, upon animals. The author, in submitting the results of his investigation, states that both men and inferior animals which live on elevated land are submitted to a pressure the weakness of which, in proportion to that at the sea level, cannot be without its effect upon their organizations. Important cities, in fact, exist at altitudes above 9,600 feet, and the high plateaus of Anahuac, Mexico, are populated by thousands. There are, besides, industrial pursuits which require workmen to labor in a strongly compressed atmosphere in submerged caissons, as are employed in bridge building, in the operation of sinking wells, in the descent of diving bells, and in pearl, coral, and sponge fishing.

In describing the discoveries of M. Bert, to the experimental demonstration of which we shall shortly pass, it is necessary first to remind the reader that the actual tension of the oxygen in the air which we breathe is equal to one fifth that of the atmosphere, since the gas constitutes 0·21 of the composition of the latter. Now this tension may be increased by compressing the air, so that air containing 42 per cent of oxygen will correspond to ordinary air at two atmospheres pressure, and so on, relatively, upwards. Inversely the tension of a semi atmosphere, equal to 14·8 inches of mercury, will be 10 5; of one third atmosphere, 7, and thus down.

The researches of M. Bert show that the atmospheric pressure never acts by any mechanical or physical influence, as has been heretofore supposed, but solely by causing the tension of the oxygen to vary, and hence the conditions of the combinations of that gas with animal blood and tissues. When the pressure decreases, animals and vegetables are menaced with death by simple suffocation, due to a privation of oxygen. When the opposite state of affairs occurs, death likewise supervenes, due to the poisonous effect of the excess of oxygen.

In the following description, the experiments upon the results of diminution of pressure are detailed, and in a succeeding article we shall notice the investigations bearing upon the effects of opposite conditions. In order to experiment upon large animals, M. Bert, constructed the apparatus represented in Fig. 1. A A′ are large cylinders containing heavy glass windows. B is another cylinder, in which a vacuum is formed. C is a bell glass in which, by means of B, a vacuum may be instantly produced. R R′ are cocks communicating with the cylinders; *r*, *d*, and *s* are other cocks for removing blood, etc. At *a* *a′* are the thermometers, and at *m* *m′*, manometers. The boiler shown at the left operates a steam air pump, which, in connection with the apparatus, produces low pressures of air in the cylinders.

In order to determine the gases in the blood, a dog was fixed on a sort of semi-circular frame (Fig. 2), which fitted exactly into one of the cylinders. The carotid artery being exposed, a tube was conducted therefrom and carried to the exterior of the cylinder. By suitable devices the blood could be drawn at any moment without causing coagulation or allowing the surrounding atmosphere to enter the artery. The drawing was done by the operator outside, by means of a graduated syringe, and the gases were removed from the fluid by a peculiar pump.

From numerous analyses thus conducted, it appeared that below a pressure of 21·4 inches there was an increasing diminution of the oxygen in the blood. From 20 volumes of oxygen to 100 volumes of blood at the above barometric hight, the decrease proceeded as follows: 17·5 inches, 16 volumes; 13·6 inches, 12 volumes; 9·7 inches, 10 volumes; 6·4 inches, 7 volumes. In other words, below 11·7 inches the arterial blood is poorer in oxygen than ordinary venous blood.

A very striking experiment showed clearly that the suffocating effects were due to the preponderating influence of the tension of the oxygen and not to the almost null results of barometric pressure. A sparrow was placed under a bell glass, in which a gradual depression was produced. The bird appeared very ill at 9·7 inches, and fell apparently dying at 7·8 inches. Normal pressure was then re-established by admitting oxygen. The bird recovering, further depression was proceeded with, when the same effects did not take place until from 7·02 to 5·8 inches. Oxygen again admitted caused a second revival, and, finally, it was shown that the diminution might be carried to 2·7 inches without killing the animal.

Not content with thus proving the truth of his theories upon lower animals, M. Bert, in order to determine the sensations experienced, entered the cylinder himself. At a pressure of 17·5 inches, he experienced the sickness known as *mal de montagne* accompanied by nausea and weakness, the pulse increasing from 60 to 85 beats. At this moment he admitted and breathed an artificial atmosphere containing 75 per cent of oxygen. Instantaneously the illness disappeared, and the pulse returned to its normal condition. The investigator remained in the cylinder without inconvenience when the barometer marked 9·7 inches. This corresponds to a hight of 28,320 feet, a point above that at which Glaisher, in his celebrated ascent, fell senseless, and equal in altitude to the highest mountain peak on the earth.

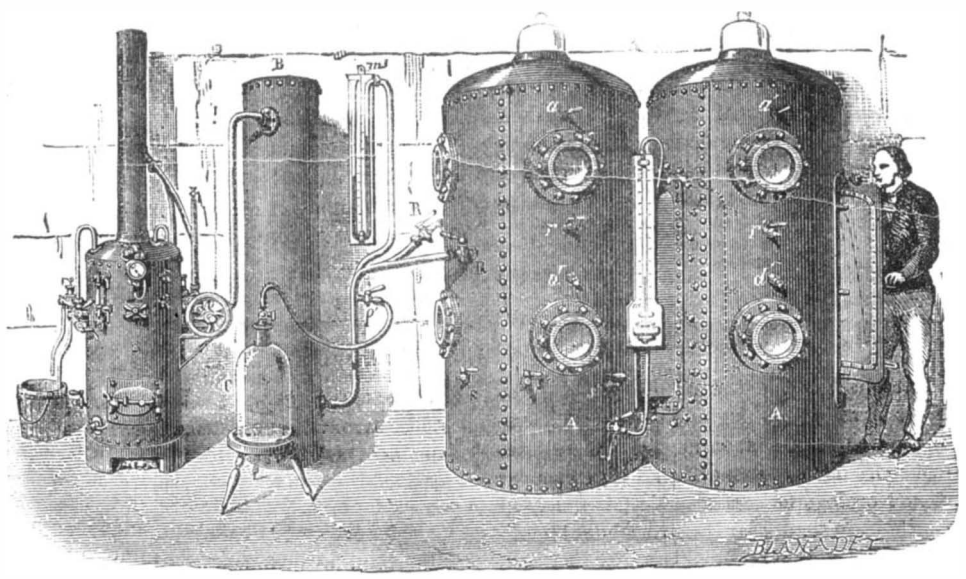

BERT'S APPARATUS FOR NOTING EFFECTS OF AIR PRESSURE.

It would appear, therefore, that, through M. Bert's discoveries, explorers will be enabled to ascend elevations hitherto deemed inaccessible, and aeronauts to penetrate regions of our atmosphere where life, under ordinary conditions, cannot exist.

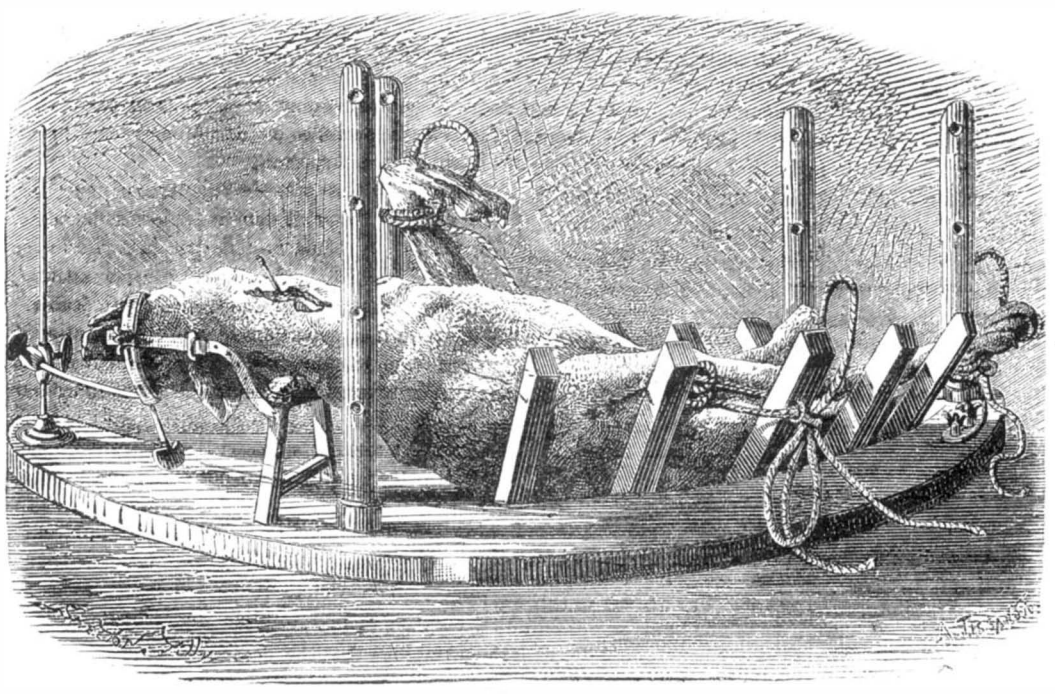

MODE OF PLACING ANIMALS IN BERT'S AIR CYLINDER.

European Ordnance.

The United States Government, being in quest of a system of rifled ordnance, sent a naval mission to Europe four years ago to inspect the chief gun factories in the principal countries in Europe, and to report upon the systems of ordnance in course of manufacture. This has resulted in two quarto volumes, containing 640 pages of matter, the best half of which is devoted to the ordnance produced in Great Britain and the remainder to the Continent. Considerable discrimination has been shown in selecting salient points for detail, and much impartiality in describing the merits of the various systems, both of construction and of rifling, etc. Admitted to the principal factories of Europe, the American naval mission made good use of eyes and ears, and the result is a compilation of varied information which only needs an index—strange omission—to prove of great service both to the manufacturer and to the artillerist.

Amongst the factories visited in England: Woolwich, the London Ordnance Works, Whitworth's, Jarrow, Barrow-in-Furness, and Low Moor are duly honored, the system of construction at the Royal Arsenal and by Messrs. Vavasseur being carefully detailed; while the treatment of the ore at Jarrow and Low Moor, etc., is carefully described, as well as the production of steel by Firth and by Whitworth. Our gunpowder factories, dockyards, iron plate rolling, torpedoes, and naval organization are not forgotten. Our own naval men may learn from their United States brethren some important facts connected with their own weapons, which have hitherto been shut up in the archives of the War Department. It is, however, when the naval mission passes to foreign ordnance factories that interest is chiefly awakened. Little is known in this country of foreign ordnance, except that nearly every country in Europe has obtained Woolwich guns and projectiles for experimental comparison with their own, and they one and all have rejected both the construction and the rifling in favor among English soldiers. Holland does, it is true, import Armstrong (Woolwich) guns and projectiles for its few ships of war; but its army adopts the French breech loader. For a time the Austrian naval armament was divided between Krupp's breech loaders and Armstrong's (Woolwich) muzzle loaders, but the short life of the latter has led to its being discarded. France, which has fallen behind the race of ordnance construction, gave the Woolwich system a patient and exhaustive trial, with the like result. Italy is striving manfully to work out a system of its own. Russia and Germany have given themselves over unreservedly to the Krupp system.

All heavy ordnance are now built with steel barrels, this material being found best capable of withstanding erosion from the powder and indentation by the shot. But much divergency occurs in the mode of supporting the barrel by exterior layers of metal. Woolwich obtains support by coiling, round the steel barrel, bars of wrought iron. Vavasseur supports the barrel by shrinking on hoops of steel, so regulated that the first layer of hoops shall not come into serious operation until the elasticity of the barrel has been developed. Krupp, who has been gradually assimilating his construction to that of Vavasseur, first by abandoning block steel for the breech, and then abandoning it for the chase, still makes the barrel much thicker at the inner end than is found desirable in this country, and so shrinks on the outer hoops as to cripple the elastic action of the barrel. The French have adopted a system of construction which would be tolerable enough in conversion of old cast iron guns into rifled ordnance of an inferior order, but is without any merit but cheapness in new pieces. A steel half barrel is imbedded in cast iron, and further supported by steel hoops over the powder chamber. By this means the elasticity of the steel half of the barrel is crushed, and a joint with cast iron formed in the interior. The idea was, probably, taken from Parsons' system of converting old smooth-bore cast iron guns into rifled ordnance, which was tried in France with most marked success. But if so, we can hardly think the new plan an improvement on Parsons' method of inserting a full length steel barrel into the old cast iron bore, and supporting the powder chamber by steel jackets in contact with the barrel.

The Palliser conversion differs from the Parsons, chiefly in employing a barrel of wrought iron, a material too soft to endure large charges or the hammering of loose heavy projectiles. But the strangest system of converting cast iron smooth bores into rifled ordnance is that adopted in Holland, of lining the bore with bronze, a soft material quite incapable of withstanding the heat and rush of gases evolved in the combustion of large charges.

Belgium employs a cast iron barrel, supported, from breech to trunnions, by two tiers of steel rings or hoops. But as this country has no navy, it does not require very heavy ordnance, and its experience in this direction is not so great.

Next to the material and system of construction, the question of breech *versus* muzzle loader demands attention. Recent experiments have shown that an enlarged powder chamber, in permitting a reduction in length of the cartridge and thus placing all the powder more nearly equidistant to the point of ignition, improves the combustion, and adds largely to the velocity and striking force of the projectile. This enlargement of the diameter of the cartridge beyond that of the bore can only be attained by breech loading. The plan of closing the breech originally adopted in this country, having proved very faulty, the principle was discredited, and the system abandonsd. But wherever the naval mission of the United States went on the Continent, they found breech loading in favor, so that of all the considerable States of Europe, England, stands alone in its use of muzzle loaders.

The difficulty of preventing the escape of gas at the breech naturally increases with the amount of gunpowder and weight of shot employed. But it would appear that the Broadwell ring [an American invention], now generally in use with the heavier breech loaders on the Continent, and in a modified form used by Vavasseur in this country, appears effectual to that end. Krupp's breech closing arrangement is free from all the objections which led to our discarding the Armstrong system, and deserves the commendation given it by the naval mission.

© 1874 SCIENTIFIC AMERICAN, INC.

The real difficulty in ordnance lies, however, in the projectile. To contrive a projectile which can be driven most rapidly out of the gun, without wriggling in the bore, with its center coincident with the axis of the piece, and with the minimum of strain upon itself and the gun, while receiving the impress of a rotation proportionate to its length, has exercised many minds. Though the lead-coated projectile of Krupp has many excellences, high velocity or great penetration cannot be amongst the number, inasmuch as the drag through the barrel resists high speed, and the peeling off the lead coat in passing through armor impedes perforation. Vavasseur's copper-ringed projectile would compare favorably in both these aspects. And either would ensure a far steadier passage through the barrel, and therefore more equable powder pressures, than the balancing studs of Woolwich. France appears to have adopted copper rings on the projectiles for its new breech loaders. Objection may be taken to the overhang, unsupported at either end of these shot; but as the ring bites the grooves above as well as below, there is none of that balancing movement which is present wherever a windage shot touches the bore only at the two studs beneath and is free all round its body. If the long iron bearing and centering devices, employed in muzzle loaders by Vavasseur, Scott, Lancaster, and Whitworth, could be efficiently employed in breech loaders, we should expect higher velocities and better penetration than from any compression system of rifling. The difficulty is not insurmountable of preventing these windaged projectiles overshooting their seat when loading from the breech. Withworth has breech loaders on his system, but of small caliber, where the difficulties are small, and we can hardly accept this evidence as alone decisive in favor of the employment of windaged shot in breech loading ordnance.

The dispassionate tone adopted by the naval mission of the United States in describing the ordnance of Europe lends weight to their impartial descriptions and very reasonable recommendations; so that, whether we adopt their conclusions or not, we cannot but listen respectfully to their suggestions. The sum of their recommendations is that the Vavasseur system of construction is the best in Europe; the Parsons system of conversion, most suitable for old guns. Breech loading cannon being universal except in England, the breech closing arrangement of Krupp, with the Broadwell ring for "gas check," is regarded as best for adoption, while projectiles should have the copper rings of Vavasseur.

The Woolwich system is honored in being made the standard of comparison with that of the civilized world, with the result, however, of being declared inferior to the Vavasseur and Krupp; and the concluding paragraph of this extensive report is reserved for a condemnation of the studded projectile in favor at Woolwich, which is the chief offending cause that has landed us in such artillery difficulties that Rear Admiral Sherard Osborn, C. B., F. R. S., says: "I, for one, do not desire to take any share of responsibility in the great gun *fiasco*, which, I fear, awaits us on the commencement of a war with a first class naval power."—*Iron.*

The Education of Artisans.

Since the application of steam as a motive power for the production of almost every commodity required by man, everything seems to be wanted in a hurry; and for smart, intelligent workman of every craft, a continually increasing demand is plainly observable. But in nearly every calling thoroughness has been hitherto sacrificed to the impatience of customers, and we seem to become the more pressing the quicker we are served. The consequence is that the mechanical arts are cut up into branches, and the artisan, who should know all about his business, is made a mere expert at one particular part. Whatever a workman is quickest at like a machine, that he is kept to; and as long as he earns a living by that one thing, it is ten to one if he ever seeks to know any more. Were he compelled to turn his hand to other parts of his business, he would have to occupy in a useful way, in order to qualify himself for the performance of task by which he earned much brain work, he is the more easily led into idle pastimes, in which he often indulges to excess. His comparative prosperity makes him consequential. If he were made his daily bread. But this being secured to him without to feel that on the completeness of his abilities depended the bread which he is in the habit of earning by the repetition of a mere mechanical performance, which through constant practice becomes of no trouble to him, his mind would receive a new stimulant with each different job, and study would be the result.

Being thus compelled to see for information, his mind would be led into the parts of true knowledge in the search, and, once fairly started on that road, he would not be long until he could discern sound argument from bombast. There is much talk at present about technical education; but before the attainment of it will bear any fruit, the system of parceling out must be changed. When a boy is apprenticed to the tailoring trade, if he proves any way smart at making a vest, he never will get the chance of making trousers; and if he be quick at the latter, he will never be asked to put a stitch in a coat. What is the use of teaching the theory of any trade in schools with such a practice in existence?

In the building trade, we have masons or stonecutters who are not expected to set the stone they have wrought; wallers who turn no arches; bricklayers who dress or set no stones; and hundreds who could not read a drawing or get out a mold by which to work. Among those who are called joiners, we have men who make sashes they could not hang, and who never saw a "mouse" in their lives. We have "fixers" who, as a rule, make nothing they put up; and "framers" who would not be able to perceive the same angle in two different positions. We have "staircase hands" who affect to despise everything else connected with the construction of a building, and who, as a rule, look upon themselves as gods of wood, although they never made a circular headed sash in the whole course of their existence. Well planned houses suffer in their erection through this practice; for the "bench hand," who has been kept for a number of years at what he can do quickest, is often necessitated to turn in with a crowd of "fixers" and scrape away as best he can.

Considering the present system, it would appear that, with most builders, profit alone is the *alpha* and *omega* of every undertaking. It looks as if they do not care whether a house stands or falls, after it has been built and their gains counted into the bank. Very few have any considerations for the welfare of those whom they employ; and consequently, there is little or no reciprocation. The workshop, which ought to be conducted on the principle of a school where technical instruction is imparted, as well as for the fabrication of an article which brings a profit, is very often superintended by a man chosen more for his driving qualities than for his information.

It is seldom that a man capable of imparting what he knows is met with in such positions, and the generality of men in charge are cross and intemperate in their language, instead of being kind and considerate. As to receiving instruction, men are left very much to themselves to pick up that which they would sooner and better understand if explained by a man competent to do so. The language used by the generality of foremen, too, is very often the most abusive and sometimes revolting, such as no man aspiring to are spectable position in society should be heard giving utterance to. The susceptible dull youth of one-and-twenty is sneered at if he chance to ask the foreman a question concerning his work, and mulcted out of money, or wheeled into paying for beer, for the information which he receives from his older fellow. Capitalists should look after these practices, and apply a remendy, for one or two hours' prefatory instruction or forethought often saves a great amount of labor. Those who cannot see before them lose much time groping their way, and obviously the loss is to the employer. It is often said that the workers are not expected to be thinkers. In fact, the remark is frequently made: "You are paid for working, sir, not for thinking," addressed as a reprimand to those who gave such a reason for being caught, as the man in charge might suppose, wasting the employer's time. This is, too, without the least inquiry concerning the truth of the assertion. The result of this system is that men who would otherwise seek to become intelligent and useful in a general sense, lay down their minds to become expert at one or two things, and in many cases sharp only at what is called "shaping," that is, by their bustling about and wielding their tools juggler fashion, making people believe they are qualified for anything. To be sure, this kind of tact shows a knowledge of human nature on the part of the person who employs it, and the present system is the chief cause that leads many to resort to it; but also shows the weakness, superficiality, perhaps vanity, of those who are the victims.

If it were the practice that the foreman was bound to call his apprentices and men together once or twice a week, say for an hour, or even half an hour, at a time, and give them a lecture during working hours upon some technical subject, hundreds would be very thankful, and willing to subscribe to the expense. After working hours, very many working men do not like attending lecture halls for such a purpose, and they would be more at home in a class got up specially for themselves, and particularly when it would be taught where every practical appliance necessary for demonstration was close at hand.—*The American Builder.*

Correspondence.

Horse vs. Steam Power.

To the Editor of the Scientific American:

I see that, on page 346 of your current volume, W. F. W. asks which is most efficient, a two horse steam engine or two horses weighing 2,000 lbs., when used in an endless railway power. The answer to this query states that usually an engine of one horse power will do more work in the same time than one horse could do, with the advantage that the engine would not get tired.

I desire to state that, from numerous statistics from English and French authorities for a century past, together with over thirty years' experience in the application and use of animal power as a substitute for manual labor, and numerous and exhaustive trials with all motors, especially horses and steam power, I am satisfied beyond a possibility of doubt that any two good work horses, of two thousand pounds weight, can walk eight hours each day at the rate of about 1½ miles per hour upon a moving plane at an inclination of from 13° to 15°, without fatigue or injury, for six days per week for their natural working life; and this, upon a well designed and constructed endless railway power, will cause them to exert an average constant power equal to about 82,500 foot pounds per minute, or equal to 2½ horse power; from which must be deducted for friction of such power (by actual results) from 11 to 15 per cent, which reduces the force transmitted and utilized to, say, 77,550 foot pounds per minute, or 38,775 foot pounds per minute for each horse, or 1·175 horse power net, transmitted. These data are partially taken from the reports of trials by the United States Agricultural Society and the New York State Agricultural Society during the past ten years.

In regard to small steam engines, I have always allowed and deducted (for their own friction) 25, 30,35 or 50 per cent from their rated power for six, four, two, and one horse steam engines respectively; and a long experience has confirmed in my mind the correctness of this reduction. With poorly designed and poorly constructed horse powers or steam engines, the results would be lessened, while almost invariably the expenses of operating them would be enhanced in a like ratio.

Albany, N. Y. HORACE L. EMERY.

The Mississippi River.

To the Editor of the Scientific American:

Having noticed within the past year a number of schemes to relieve the shipping of the bar at the mouth of the Mississippi river, I intend to bring before the government a plan for carrying vessels, not over but through the bar, in the following manner: I would build a propeller to draw as much water as the largest ship that will be required to be towed through the bar. She should be as short as possible, in order to be easily manipulated and not require too much ballast to get the required draft. In or near the bottom of her hold, I would place a sufficient number of immense force pumps, to be worked by steam. I would have five iron discharge pipes, of nine inches diameter, to discharge their water through the steamer's cutwater, one above the other, well down below the mud line. The two lowest pipes are to point slightly down in order that the water will pass under the boat when she is in motion. The pipes are to come flush with the outside of the boat and to be reduced to a diameter of six inches at the point of discharge, to give the water velocity. Then I would have three seven inch discharge pipes, contracted to five inches at the mouth, on each bow, one above the other, well down under the boat and pointing down and forward at an angle of 30°. Then I would have a row of seven inch discharge pipes about 10 or perhaps 15 feet apart, along the whole length of the boat on each side, well down under her sides and pointing down and forward at an angle of 30°. Those pipes are to be contracted at the mouth to five inches diameter. I propose also one six inch pipe to discharge its water down through or alongside the keel, well forward under the bow. The feed or suction pipes are to take the water as near the surface as possible, in order to use clear water.

I believe such a boat would tow any ship or steamer through the bar at the mouth of the Mississippi river with perfect ease and safety. She would have a perfect volcano under her, constantly bursting up through the mud and sand and leaving behind her an immense channel. And as she would be constantly tearing the bar to pieces, the ebb and flow of the river would in a great measure remove the bar altogether. I think there is no plan by which the obstructions can be so cheaply overcome, as one such boat will do all the towing both in and out of the river.

A powerful force pump put on board of the steamers running above New Orleans, to throw a powerful stream or two under their bows, would be a great assistance to them in getting off sand bars, where they often get stuck fast.

Presque Isle, Mich. SIDNEY COOK.

Prices of Gas.

The following are the current rates for gas paid by consumers, per 1,000 feet:

Albany	$2.50	Rochester	$3.50
Baltimore	$2.75	St. Louis	$3.25
Boston	$2.50	Syracuse	$3.25
Chicago	$3.37½	Troy	$3.25
Cleveland	$2 50	Washington	$3.56
Concord	$3.20	Hamilton	$3.00
Harlem	$3.00	Kingston	$3.50
Lowell	$2.75	London, Canada	$3.00
Manchester	$2.70	Montreal	$2.60
New York	$2.75	Quebec	$2.80
New Orleans	$3.00	Toronto	$2.50
Oswego	$3.50		

A writer in the Boston *Cultivator* finds that most of the so-called strained honey sold in bottles is composed as follows: Cane or other sugar is melted in a decoction of slippery elm bark in water. Some manufacturers use, instead of elm, a solution of gum arabic and starch, to give it consistency and save sugar; but this last does not resemble honey so much when dropped, as it lacks the stringy appearance. These mixtures, with or without the addition of a little cheap Cuban honey, are flavored with essence, and the mess is ready for sale. The only true way to obtain real honey is to buy it with the comb.

TO DESTROY MOLES.—Bryan Tyson, Washington City, gives the following method for making pills to destroy moles: Make a stiff dough of corn meal, mixing with it a small quantity of arsenic. Make a hole with a finger in the runways, drop in a lump of dough about the size of a marble, and then cover over with a lump of earth to exclude the light. After the first rain, go over the field again and deposit in all freshly made roads. I once concluded to plant a piece of sandy bottom land in sweet potatoes; but as it was much infested by moles, my success depended on first exterminating them. A few doses of arsenic given in the way described brought about the desired result, and it was a very rare circumstance to see the track of a mole in this piece of ground during the entire summer.

CHARGES FOR MACHINE TOOLS A QUARTER OF A CENTURY AGO.—The following is interesting as showing the cost of work done on machine tools twenty-five years ago. We give the charge per day for use of tools: Large boring mill, $17.50; medium boring mill, $12; large punching machine, $25; heavy lathe, $15; small lathe, $5 50; large drill, $8; medium drill, $4.50; large planer, $7.37½; medium size planer, $5.33⅓; forge (with smith and helper), $10; small forge (with smith and helper), $5. Machinists received from $1.95 to $2.15, and boiler makers, from $1.75 to $1.90.

© 1874 SCIENTIFIC AMERICAN, INC.

PRACTICAL MECHANISM.

NUMBER III.

BY JOSHUA ROSE.

THE SPRING TOOL.

Fig. 15 is a spring tool, which is specially adapted to fin-

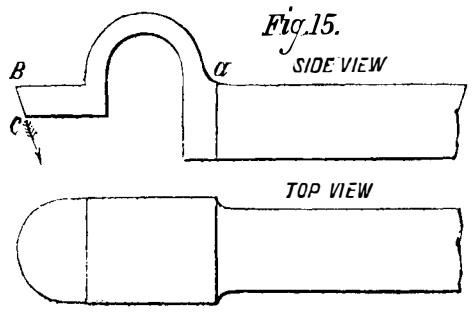

ishing sweeps or curves, and may be used on either wrought or cast iron, or brass; the only difference in shape required to fit it for such various uses is to give it less top rake for cast than for wrought iron, and less for brass than for either. The fulcrum off which it springs is at the point, *a*, because that is the weakest part (since the cutting edge, B, is at a leverage to *a*); the line of spring of the edge, B, is therefore in the direction of the dotted line, C, which is away from its cut, so that it will give way to the metal rather than spring into it, which causes it to recede from the harder and spring into the softer parts of the metal, rendering its use unadvisable except for finishing curves, which it will do more smoothly and cleanly than any other tool, especially when necessity compels it to be held far out from the tool post.

BORING TOOLS.

Standard bits and reamers have superseded the use of boring tools for all special and many other purposes, but there are numerous cases where a boring tool cannot be dispensed with, especially in repairing shops and for promiscuous work.

The boring tool is very subservient to spring in consequence of its cutting edge being in most instances far out from the tool post, and also from the slightness of the body of the tool when used to bore holes of a comparatively small diameter.

It should, when used for wrought iron, always be placed so that its cutting edge is a little below the center of the hole, in which case the bottom of the body of the tool is liable, in small holes, to bear against the bottom of the hole, unless the cutting part is made to be a little below the center of the body of the tool, rendering it rather difficult to grind on the top face; it is not, however, imperatively necessary to grind it there, since it can be sharpened by grinding the side faces; and the advantage gained by being enabled to get, into a given sized hole, a stouter tool than otherwise could be done, and, as a result, to take deeper and more nearly parallel cuts (for these tools generally spring off their cut at the back end of the hole, leaving it taper unless several light cuts are taken out) more than compensates for the extra wear of the tool, consequent upon being able to grind it upon one part only.

Fig. 16 represents a section of a boring tool, as above described, for use on wrought iron. *a* is a section of the body



of the tool; B is the cutting part, and C is the outline of the hole to be bored.

Very little bottom rake need be given to the tool, so that, when it springs from the pressure of the cut, it cannot enter the cut deeper than is intended, because of the side rake coming into contact with the side of the hole. It may, however, possess a maximum of top rake.

Boring tools for cast iron require less top and more side rake, and to be placed at the center of the work or even a little above the center. For brass, the cutting point, B, should have no top rake; and if the tool jars or chatters, as frequently occurs in cutting a groove, it must be made as shown in Fig. 17, *a* being a section of the body of the tool, B, the cutting part, and C the outline of the hole. B, being the



owest point of the top face, possesses negative top rake, and a corresponding tendency to scrape rather than cut keenly. The point, B, should always be above the center of the hole, so that, in springing, it will spring away from and not into its cut. Less top rake is required, if the point, B, of the cutting edge is ground so as to be used for screw-cutting than if for taking plain cuts.

When the skin of the metal to be cut is unusually hard, as frequently occurs in cast iron, the shape of the cutting part of the boring tool must be such that its point will enter the cut first, so that it cuts the inside and softer metal. The hard outside metal will then break off with the shaving without requiring to be cut by the tool edge, while the angle of the cut will keep the tool point into its cut from the pressure required to break the shaving. A tool of this description is



represented in Fig. 18. *a* is the point of the tool, and from *a* to B is the cutting edge; the dotted lines, *c* and D, represent the depth of the cut, *c* being the inside skin of the metal, supposed to be hard.

The angle at which the cutting edge stands to the cut causes the pressure, due to the bending and fracturing of the shaving, to be in the direction of *e*, which keeps the tool point into its cut; while the resistance of the tool point to this force, reacting upon the cut, from *a* to B, causes the hard skin to break away.

When a cut is being taken which is not sufficient to clean up or true the work, less top rake must be given, as a very keen tool loses its edge more quickly than one less keen. The reason for taking the rake off the top of a tool is that, if it were taken off the bottom, the cutting edge would not be so well supported by the metal, and would have a tendency to scrape, which rule applies both to inside and outside cuts. For brass work, top rake is never applied, because it would cause the tool to jar and cut roughly, bottom rake alone being sufficient to give a tool for brass the requisite keenness.



Fig. 19 shows a front tool for brass, concerning which nothing requires to be said, except that it cannot be made too hard, and that the top face must have negative rake when the tool point is held far out from the tool post.

SIDE TOOLS.

Side tools for iron are subject to all the principles already explained as governing the shapes of front tools, and differ from them only in the fact that the cutting end of the tool is bent around to enable the cutting edge on one side to cut a face on the work which stands at right angles with the straight cut. A front tool is used to take the straight cut nearly up to the shoulder, then a side tool is introduced to take out the corner and cut the side face.

A side tool, whose cutting end is bent to the left, as in Fig. 20, is called a left-handed side tool, and one which is bent to the right, a right-handed side tool. The cutting edges, *a* and B, should form an acute angle, so that, when the point of the tool is cutting out a corner, either the point only or one edge is cutting at a time, for if both of the edges cut at once, the strain upon the tool causes it to spring in.

The form of side tool shown in Fig. 20 is that most desirable for all work where it can be got in: and in the event of a side face being very hard, it possesses the advantage that the point of the tool may be made to enter the cut first, and, cutting beneath the hard skin, fracture it off without cutting it, the pressure of the shaving on the tool keeping the latter to its cut, as shown in Fig. 21.



a is the cutting part of the tool; B is a shaft with a collar on it; *c* is the side cut being taken off the collar, and D is the face, supposed to be hard. The cut is here shown as being commenced from the largest diameter of the collar, and being fed inwards so that the point of the tool may cut well beneath the hard face, D, and so that the pressure of the cut on the tool may keep it to its cut, as already explained, but the tool will cut equally as advantageously if the cut is commenced at the smallest diameter of the collar and fed outwards, if the skin, D, is not unusually hard.

For cutting down side faces where there is but little room for the tool to pass, the tool shown in Fig. 22 is used, *a* being the cutting edge. Not much clearance is required on the side of this tool, the keenness being given to it by grinding



away the edge, C, so that the top face, from C to *a*, is an inclined plane, *a* being the apex. This tool should be so placed that the point, B, cuts a little the deepest, and the cutting edge at the point, D, is clear of the cut, the only consideration with reference to it is how much rake to give it on the face, from C to *a*, which should be less for cast iron than for wrought iron, and more when the metal is soft than when it is hard. Its spring does not affect it to any degree, since it springs vertically and in a line with the face of the cut, and not laterally and into it.

The best form of side tool for cutting brass is the diamond point, presented in Fig. 23, *a a* being the cutting edges. It requires but little side rake upon either the top or side face, and, when held far out from the tool post, should have the rake taken off the top to prevent it from springing. In grinding it, grind only the end (rounding off the corner slightly), so as to preserve the bend upon the end of the tool, which is placed there to give it clearance. It will take a parallel cut equally as well as a side one, and for small work can be used to advantage for both purposes.



Vibrations of Liquid Surfaces.

Barthélemy has subjected to investigation the undulations which are produced upon liquid surfaces when these are thrown into vibration. The best results were obtained when the vessel of liquid was placed upon the resonant case of a tuning fork. Similar results were also obtained upon the sounding board of a piano. In this way the surface of the liquid assumed a fixed condition of elevation and depression, the result of uniform vibration over its entire area. Rectangular vessels give two sets of brilliant lines parallel to each side, formed by the ridges of the waves. Between these are less luminous lines produced by the hollows. Bright points are formed at the intersections of both. As the movement dies away, the lines parallel to the shorter sides disappear first, leaving those parallel to the longer; though sometimes components of both are left, forming zigzags diagonally across the surface. From his experiments Barthélemy deduces the following laws: 1st, the breadth of the undulations is inversely as the number of vibrations; and 2d, the distance between two lines produced by the same fork is independent of the density of the liquid. The figures given by circular masses of liquid consist of equidistant circular lines intersected by radii equally equidistant, thus giving trapezoidal forms with curvilinear bases. If the fork touches the vessel, a cross of no vibration appears, corresponding to the nodal lines of this vessel. As the vibration ceases, two opposite sectors disappear and the two alternate ones remain. By placing sand on the surface of the mercury and then covering it with water, circular lines are formed and also the cross of no vibration, the sand gathering in heaps at the vibrating parts. Triangular vessels give lines perpendicular to the sides, forming brilliant hexagons, the centers of which are the angles of fainter hexagons, having the radii of the first set for sides. As the motion lessens, only one set of lines persists, and the surface is covered with rectilinear waves perpendicular to one of the bases. Elliptical vessels give figures of exceeding beauty, the lines having reference to the two axes of the ellipse. The author calls attention to the general character of these wave surfaces. In the basin of a fountain, in the waves of the sea, these forms are recognized. Even in the sand on the sea bottom they can be traced. Certain lines thus made gave on measurement 2·6 vibrations per second. They may be seen 300 feet from the beach and at a depth of 25 or 30 feet. So, out of the water, the sand on the beach was found to have taken these forms, thus suggesting that the air itself was capable of similar vibration. So also clouds are arranged often in parallel bands, being being then considered a precursor of fine weather. Even in geology, the author thinks certain regular and equidistant foldings of stratified rocks evidence of analogous vibrations. The ventral segments of a liquid vein, M. Barthélemy thinks, are produced by the vibration of the liquid mass upon which it falls reacting upon it. And he makes an ingenious application of these facts to account for the phenomena of stratification produced by electric discharges in rarefied media.—*An. Chim. Phys.*—*American Journal of Science and Arts.*

L. P. S. says "I have run a piece of machinery in rawhide boxes for fourteen years without oil; it is good yet and runs at 4,500 per minute. I put it in while soft, and let it remain until dry." [We are glad to receive notes of this kind, giving results of actual practice. Nearly every one of our readers could send some information that would be valuable.]

© 1874 SCIENTIFIC AMERICAN, INC.

STEVENS' IMPROVED HINGE.

The invention represented in our engraving is a hinge, which is shown applied to the door of a safe, for which purpose it is especially well adapted. Upon the casing or body of the safe is cast, or otherwise attached, a socket, A, into which passes the pin, B. The latter is held in place by the screws shown in the sectional view, Fig. 2, and which have their heads within the safe. In order to remove the door, these screws are taken out; and a punch, pushed down the oil hole, C, speedily forces out the pin, B, in case the same should stick. The top of the door is then moved out a little, when the lower hinge, D, is readily lifted out of its socket, E. F is a set screw, provided to prevent the door from sagging as the tenant of the lower hinge wears away.

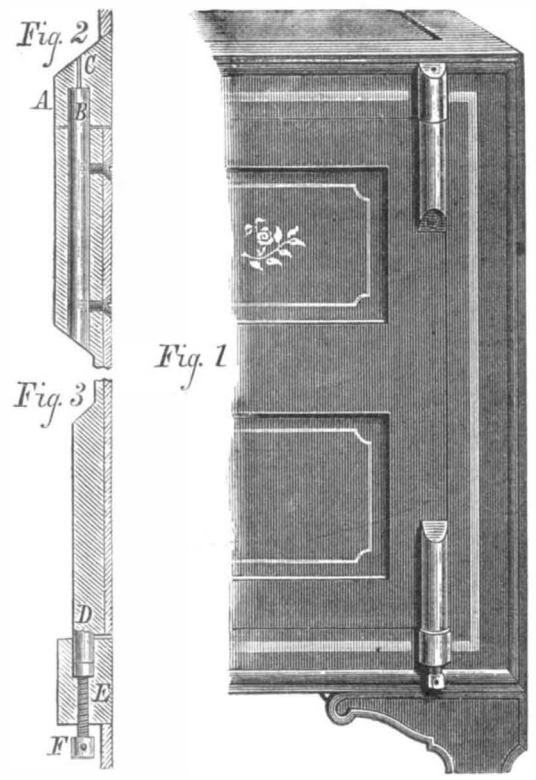

This invention is quite simple and easily applied, while it appears to be substantial and secure. Patented December 30, 1873, by Mr. Wm. F. Stevens, of Melrose, Mass., who may be addressed for further information.

IMPROVED PATENT GANG SAW TABLE.

This is an invention specially adapted to meet the wants of users of flooring machines, who have found difficulty in supplying material, sawn in strips from mixed widths of boards, fast enough to keep the floorer in operation. A good machine of the latter description should plane and match from ten to twelve thousand feet, broad measure, of four to six inch flooring, in ten hours; but it is hardly possible for a man to saw more than from six to eight thousand feet, into strips, in the same time and over a single saw. Hence it is either necessary to buy strips prepared at the saw mill (and these are rarely accurately sawn), have two saw tables for the floorer, or else not work the latter up to its full capacity, none of which are economical operations. Made on an ordinary saw table, strips are produced in varying sizes; and perhaps after some hours work, not enough of any one size can be sorted out to keep the matching machine at work, thus involving changing the apparatus so frequently as to prevent its performing its full amount of labor.

The device illustrated in the annexed engraving is claimed to meet the requirements above indicated. It is able to provide a supply sufficient to keep two matchers constantly at work. Two saws are used for slitting the lumber into strips of suitable width, one of which, A, is secured upon the arbor rigidly, and the other, B, is attached to a sliding and revolving sleeve and collar. This sleeve is provided with grooves to receive Babbitt metal, and works within a journal box which slides with it, and, besides, has a longitudinal channel to receive the feather by which it is made to revolve with the shaft while still sliding freely along the same. The lower part of the box is provided with a downwardly extending arm, at the end of which is an eye to receive a guide rod, which extends transversely across the machine. A mortise is made through the arm, between the box and the eye, to receive a lever which is pivoted at one end to the frame and terminates at the other with a handle, C, convenient to the operator. By means of this lever the arm, and with it the sliding sleeve and saw, B, is moved nearer to or further from the fixed saw, A, in order to govern the distance between said saws, and hence the width of the strip. At D is a gage which may be adjusted to any desired distance from the screw, A, by means of the hand lever, E which communicates with a sliding sleeve traveling on a guide rod, which sleeve is suitably connected with the gage.

The carrying or guide rollers, shown at F, grasp the sawn strips and carry them forward, thus acting also as feed rollers to guide the strips truly through the machine. The upper roller is made yielding by the application of the weight, G. It will be observed that no feed rollers are used to hold the lumber before the same reaches the saw; and by such arrangement, the operator is enabled to see, when the end of the timber is placed upon the table, whether the sliding saw or gage should be removed, so that all the material in the plank may be utilized.

The arrangement of two rows of notches, into which the hand levers are dropped to hold them securely in any position, will be readily understood from the illustration. The feed is driven from the saw arbor, so that a slip of the driving belt checks the feed correspondingly.

Though the machine is designed especially for planing mills, we are informed that it can be used as a strip machine in small saw mills, and the method of holding and moving the movable saw can be advantageously used on all the different makes of gang edgers. The gage can also be applied to the ordinary single saw table. The speed is from 2,500 to 3,000 revolutions per minute, and we learn that over 20,000 feet of dimension stuff can be made in a day from miscellaneous lumber, and a much larger amount from stock boards.

Patented August 12, 1873. For machines address the Erie City Iron Works (sole manufacturers of the apparatus for the United States), or George Carroll & Brother, Erie, Pa. For right to manufacture in Canada, address John McIntosh, Toronto, Ontario.

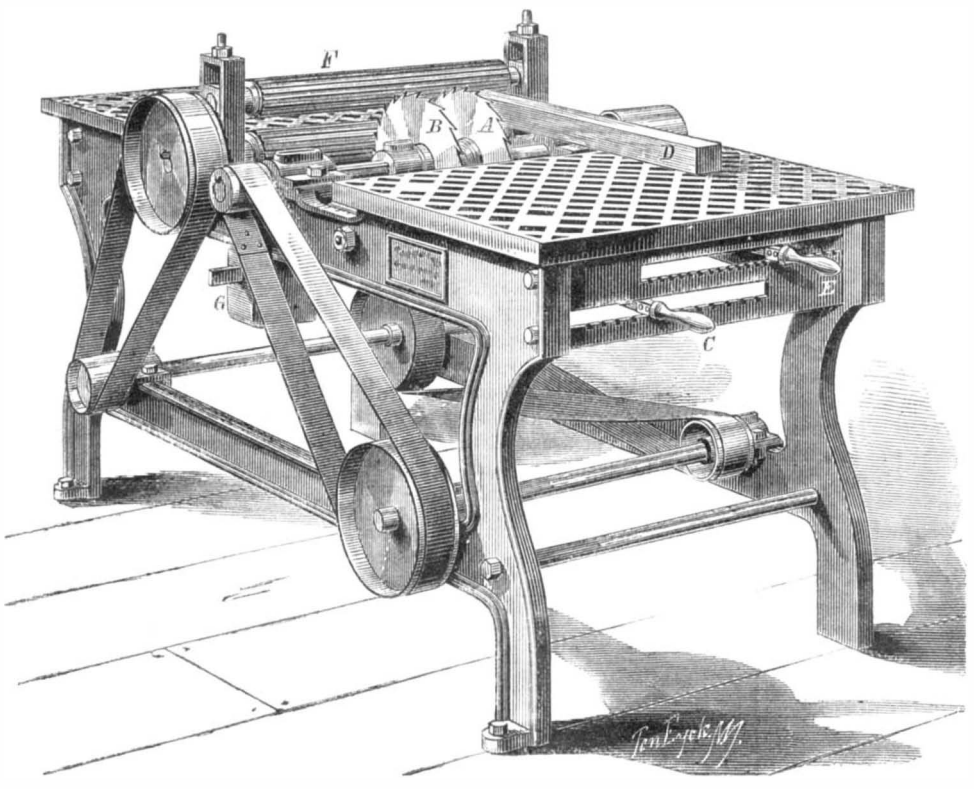

CARROLL'S PATENT GANG SAW TABLE.

The Welding of Iron.

When two pieces of ice are rubbed against each other, fusion take place between the surfaces of contact, at a temperature below zero. As soon as the pressure ceases, solidification is again produced and the pieces are welded together.

It seems to me that the welding of iron is a phenomenon exactly similar. The two pieces of iron are brought to a white heat, that is to say, more or less near to the fusing point. The repeated blows of the hammer, or the pressure of the rolls, lowers the point of fusion and causes a superficial liquefaction of the parts in contact, and thus welds the masses together; and this, because, like water, iron dilates in passing from the liquid to the solid state. Many other metals are similarly endowed; they all therefore may be welded like iron, if other conditions do not come in to oppose the manifestation of this property. Platinum welds easily at a white heat because its non-oxidizable surface, like that of ice, takes on a superficial fusion. To weld iron successfully, it is necessary that its surface should be clean, that is, free from oxide. Iron containng phosphorus welds more easily than pure iron, because its point of fusion is lower. Steel, which is more fusible still, welds at a lower temperature than iron, but the process is a more delicate one. Silver, too, like iron and platinum, has the property of expanding when it solidifies; but as it melts at a cherry red heat, it is easier to form it by casting than by welding. Bismuth and zinc are always included in the same class; but they are so very brittle near their fusing points that no one would think of attempting to weld them either by hammering or pressure. Iron in welding, therefore, only follows the example of water.

The fibrous state of iron is not a normal and regular one All crystaline iron, if the crystals are not too hard, breaks with a fibrous structure, if time be given, in the breaking, for these crystals to be drawn out into fibers. Iron which is fibrous is only iron in which the primitive crystals, surrounded by very thin films of slag—and thus separated from each other—have not been welded together during the rolling, but have been elongated into wires. A bar of such iron resembles a bundle of wires in its resistance to fraction, but it breaks with a granular fracture when exposed to a transverse blow, suddenly applied.—*M. Jordan.*

FOR a marking fluid, use coal tar dissolved in naphtha.

DAVIS' IMPROVED HYDRANT.

The hydrant represented in the annexed engraving is claimed to prevent freezing and waste of water. It is of durable construction, and is self-closing. The valve is not liable to become choked with dirt, as the passage of the water

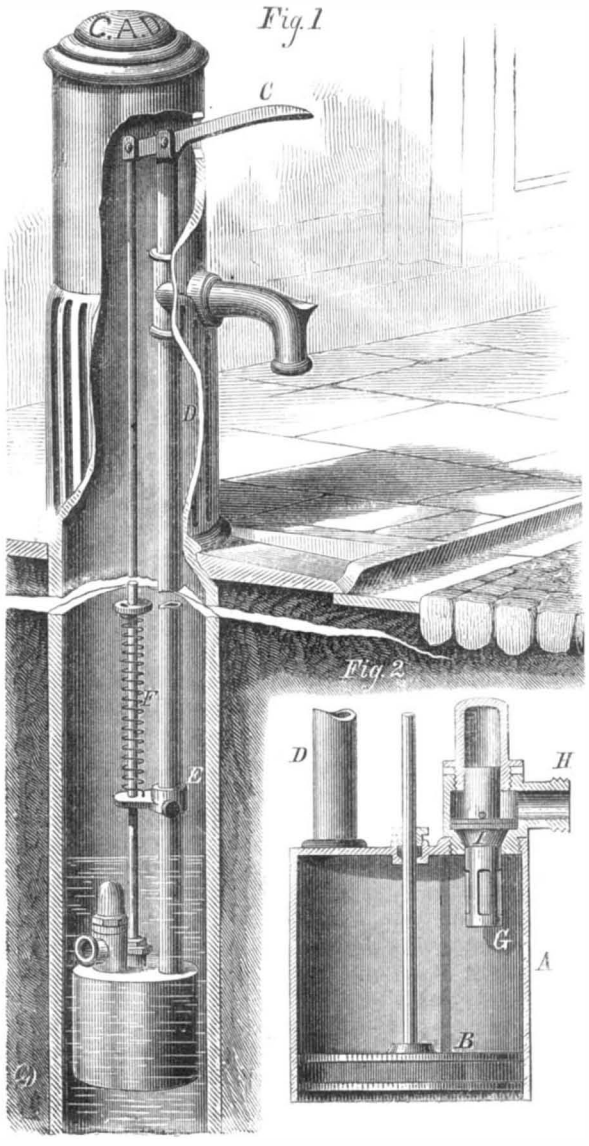

serves to clean the orifice, while the pressure of the fluid keeps the valve down.

A is a cylinder or chamber, sunk in the well and provided with a piston, B, the rod of which connects with the handle, C. D is the eduction pipe, having a suitable discharge nozzle, as shown. To this pipe is attached a guide plate, E, Fig. 1, which may be adjusted to various elevations by means of a clamp screw. On the piston rod is a fixed disk, between which and the plate, E, a spiral spring, F, is extended. The latter, being stretched when the hand lever is depressed and the piston, B, raised, will retract and throw down the piston into place as soon as the force on the lever is remitted. G, Fig. 2, is a gravity valve, having a subjacent slotted tube and an upper head working in a guide. As the piston rises, the valve is carried up until the slotted tube receives, through the inlet pipe, H, a supply of water, which is then forced up through the eduction tube, D, and discharged. The chamber, A, is thus kept always in a condition to receive the water that may be left in the tube, D, after the flow has ceased from the spout.

I is a leather or flat flexible ring that is secured to the valve by a metal ring or pin, and which acts, in case of gravel or other obstruction settling between the valve and its seat, as an auxiliary valve, being forced by the pressure of the superincumbent water to cover any crevice made and to form a watertight joint.

Patented through the Scientific American Patent Agency, April 28, 1874. For further particulars regarding sale of patent rights, licenses, etc., address the inventor, Mr. John T. Davis, 1,212 Eleventh street, Southeast, Washington, D. C.

WIRE WORMS.—These are found in the greatest quantities in fresh new loam, just brought from the field, and such soil, when used for valuable plants, should be carefully examined, and the wire worms crushed; their brownish red bodies are easily seen. Mr. Tillary writes to the *Garden* that slices of potatoes or lettuce stems will likewise entice them where they are numerous. The slices should be placed under ground, and then frequently examined. He saved a bed of seedling gladioluses that were planted in some new loam, which, he found afterwards, swarmed with wire worms, by placing slices of potatoes and lettuce stalks in the ground after he found that some of the plants were flagging.

© 1874 SCIENTIFIC AMERICAN, INC.

THE ROYAL GARDENS AT CASERTA, ITALY.

Most of our readers are familiar with the chief features of the Italian school of landscape gardening, the broad plateaus, the artificial lakes and waterfalls, and especially the formality of shape shown in trimming the edges and rows of trees. Of the pleasure grounds attached to the palace of Caserta, the country residence of the late King of Naples, we herewith publish a view, extracted from *The Garden*. Our contemporary, in describing the scene, says: "You enter through a huge royal palace, which seems admirably suited for accommodating several regiments of life guards, when the scene depicted in the illustration meets the eye—the huge cascade facing a distant hill covered with evergreen oak. Good as the engraving is, it can give little idea of the enormous length of these garden waterworks, long and well constructed stone reaches of deep clear water, broken here and there by falls, which are embellished by a rich display of sculpture and statuary. But, before reaching the waterworks, we have to traverse a very large space by habit called a garden, but which is simply a huge expanse of turf, on which stands clumps and squares, and avenues of trees. We have to approach these closely to see what they are composed of, for all are either clipped or mown, or in some way mutilated, till they lose all individual character, and merely form irregular walls of vegetation. Under one of the falls, there is a vast covered way, with well constructed rocky walks and walls, and here the maiden-hair fern grows everywhere as freely as meadow grass; it ventures out from the moist and shaded grottoes, and creeps into the eyes and ears of the spouting sea monsters outside in the sun—the only trace of life or Nature near. The distressing effect of all this gradually passes away, for one of relief, as the base of the great irregular (but also artificial) cascade is reached, till the eye dwells happily on the hills around, densely garlanded with evergreen oak. All this kind of art comes from allowing the space intended for a garden to be converted into an open air gallery for the exhibition of architecture, sculpture, etc., mostly of a mediocre, and often of a feeble or ridiculous character. Let us not, however, delude ourselves into the belief that, in creating such scenes, on either a large or small scale, we are making a garden. There is at Caserta, however, an example of one phase of real gardening which will repay the visit. It is what is called the English garden, a large piece of diversified pleasure ground, with many trees allowed to assume their natural development. Towards the end of the last century this garden was planted, and with a very happy result. The great geometrical district, so to say, gives one an idea that the region is not a fertile one; this is at once dispelled on entering the English garden. The cedars, cypresses, and deciduous trees have attained great size and beauty, and grow in stately groups, with open spaces between, so that their forms may be seen. Here is the first camellia ever introduced into Italy, where the plant is now so abundantly grown, and whence we get most of our new varieties. It is a specimen of the single red, now in full bloom, and about 20 feet high and 15 feet through. The camphor tree is seen in fine health here, in specimens nearly 50 feet. The garden is enriched by some grand cork trees, which may give many visitors a fair idea of what a noble tree this oak is when fully developed. The trees are huge in stem, picturesque in their branching, and about 80 feet high. Some of the scarcer pines attain much perfection here, as, for example, the Mexican (*p. Montezuma*), which is 60 feet high.

The Possibilities of Future Discovery.

A striking illustration of the popular lack of scientific reasoning is to be found in an editorial which recently appeared in the New York *Herald* as follows:

"The wildest imagination is unable to predict the discoveries of the future. For all we know, families in the next century may pump fuel from the river and illuminate their houses with ice and electricity. Iron vessels, properly magnetized, may sail through the air like balloons, and a trip to the Rocky Mountains may be made in an hour. Perhaps within fifty years American grain will be shot into Liverpool and Calcutta through iron pipes laid under the sea. By means of condensed air and cold vapor engines, excursion parties may travel along the floor of the ocean, sailing past ancient wrecks and mountains of coral. On land the intelligent farmer may turn the soil of a thousand acres in a day, while his son cuts wood with a platinum wire and shells corn by electricity. The matter now contained in a New York daily may be produced ten thousand times a minute, on little scraps of pasteboard, by improved photography, and boys may sell the news of the world printed on visiting cards, which their customers will read through artificial eyes. Five hundred years hence a musician may play a piano in New York connected with instruments in San Francisco, Chicago, Cincinnati, New Orleans and other cities, which will be listened to by half a million of people. A speech delivered in New York will be heard instantly in the halls of those cities; and when fashionable audiences in San Francisco go to hear some renowned singer, she will be performing in New York or Philadelphia.

In the year 1900 a man may put on his inflated overcoat, with a pair of light steering wings fastened to his arms, and go to Newark and back in an hour. All the great battles will be fought in the air. Patent thunderbolts will be used instead of cannon. A boy in Hoboken will go to Canada in the family air carriage to see his sweetheart, and the next day his father will chasten him with a magnetic rebuker because he did not return before midnight. The time is coming when the *Herald* will send a reporter to see a man reduce one of the Rocky Mountains to powder in half a day. Skillful miners will extract gold from quartz as easily as cider is squeezed from apples. A compound telescope will be invented on entirely new principles, so that one may see the planets as distinctly as we now see Staten Island. Microscopes will be made so powerful that a particle of dust on a gnat's back will appear larger than Pike's Peak. And marvelous progress will be made in psychological and mental sciences. Two men will set in baths filled with chemical liquids. One of them may be in Denver and the other in Montreal. A pipe filled with the same liquid will connect the two vessels, and the fluid will be so sensitive that each may know the other's thoughts. In these coming days, our present mode of telegraphing will be classed with the wooden ploughs of Egypt, and people will look back to steamships and locomotives as we look back to sailboats and stage coaches."

MEDICAL NOTES.

Cholera.

There may come another cholera scare this year; certainly there will come one before many years. Some doctors think the scare worse than the disease. At any rate, the nervous depression produced by reading and hearing alarming stories is a well proven semi-cause of death, by diseases which affect the nervous system, whether alone or conjointly with other disorders; and sometimes light ones are aggravated to the bitter end by imaginary fears. Knowing the force of this fact, as all experienced people do, it seems a happy thing to find an antidote, as far as cholera scares are concerned, in the following statement: Dr. Blakiston says, in the London *Medical Times and Gazette*, that it has been fully proved in the Paris hospitals that cholera is not communicable by the breath of the patient, or by contact with his body during life or after death. Most of the "stiffs," as they are called in technical vulgarity—that is, the subjects of dissection—were for many months victims of cholera in Paris, and yet no doctor and no student caught the disease. Therefore let no timid person have any fear about the infection of air or touch, but remember that the germs of cholera have been proved to be propagated through the *dejecta* (voidings in any way) which come in contact with water or food, possibly with air much breathed, though this is not fully shown.

Valerian in Diabetes.

Dr. Bouchard says extract of valerian is a powerful agent in diminishing the elimination of urea and waste of tissue seen in diabetes. He adds a curious fact, observed in long practice among the Indians of Lower California. The warriors, before entering on an expedition, go through a course of valerian regimen for a month, to get themselves into a fatigue-supporting condition. This fact suggests another, concerning the Peruvian Indians, who are able to go without food for five days, under a burdensome journey, when well supplied with the juice of the plant, so extensively used in that country, called coca. It seems to us that coca and valerian might be used in thickly settled countries as articles of medical nutrition, to say nothing of their possible value as substitutes for food of the common sort among the very poor.

Poisoning by Hydrate of Chloral.

In the case of a man who took six drams of chloral to commit suicide, electricity was first used to induce regular

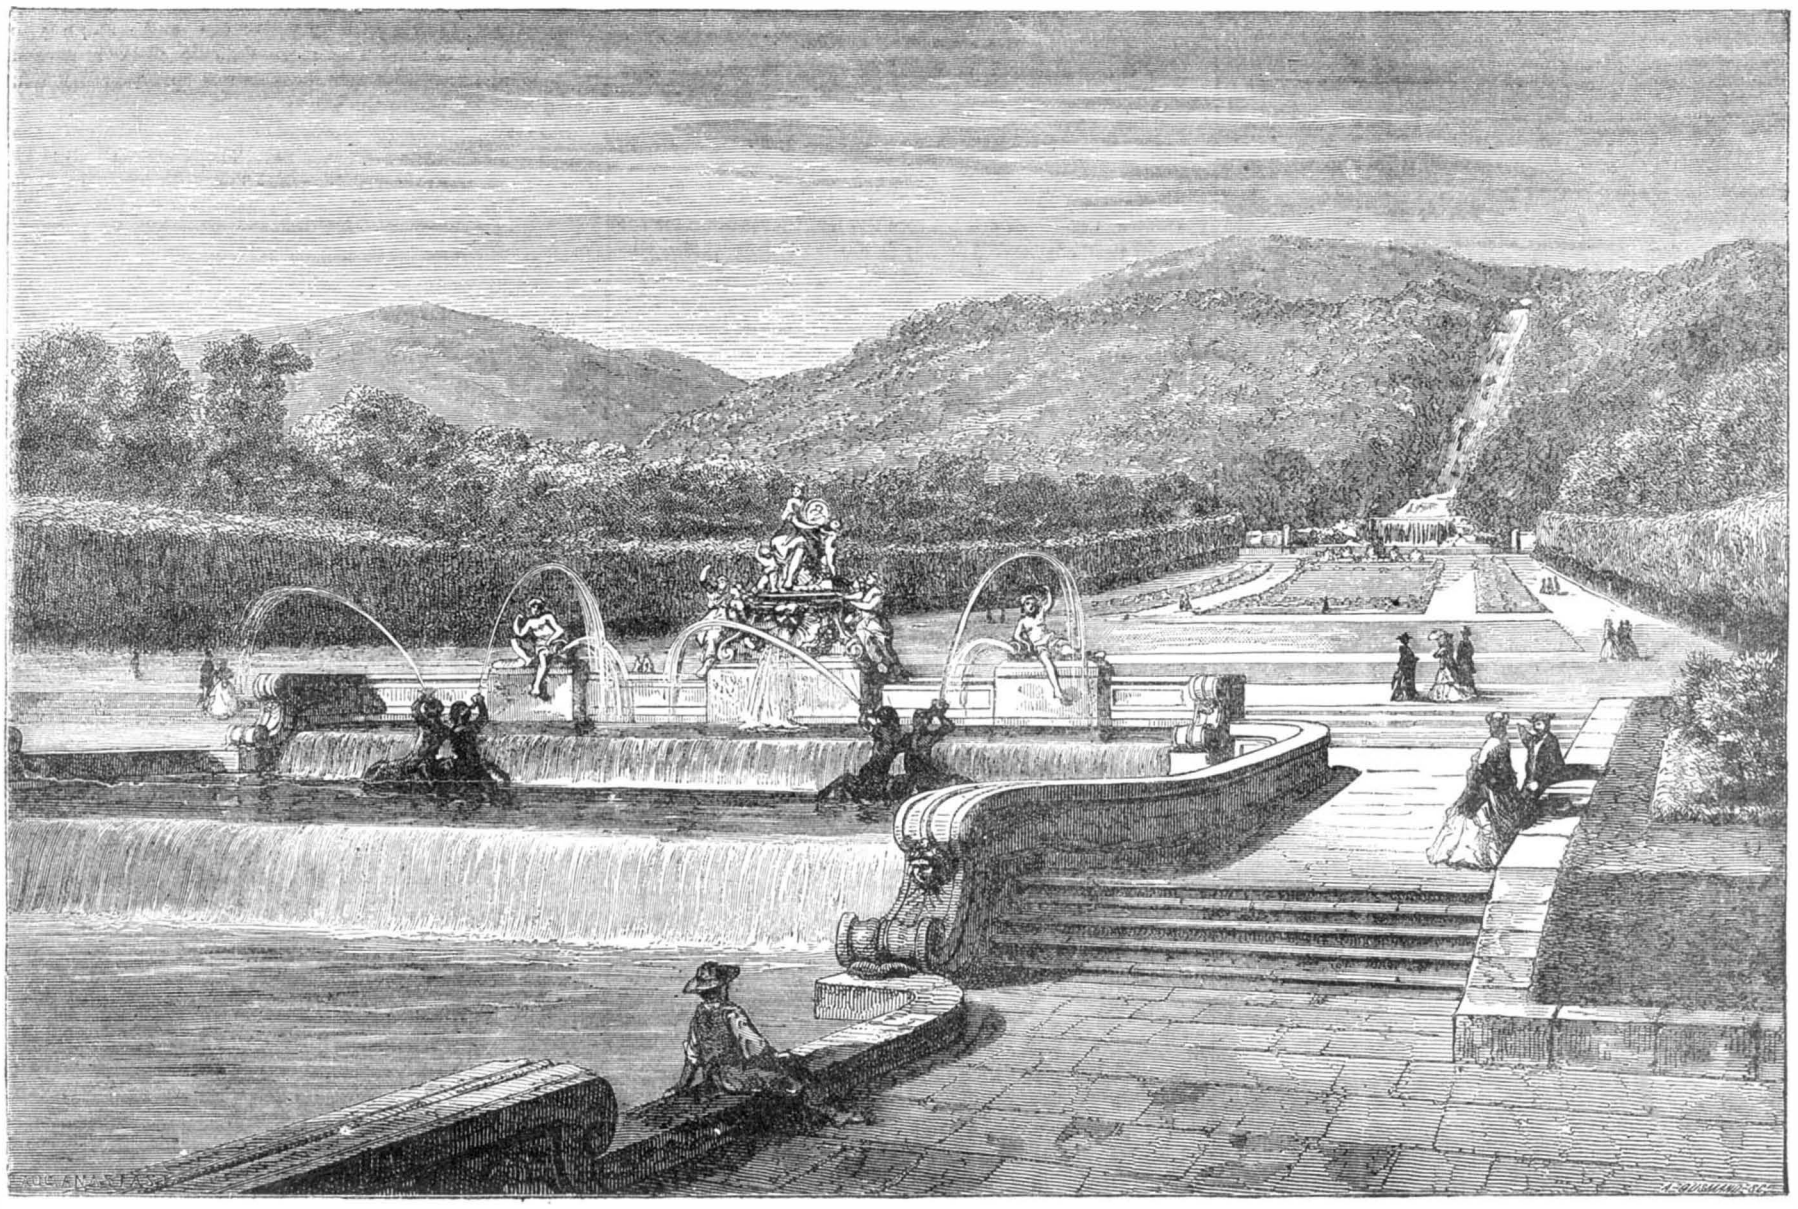

THE ROYAL GARDENS AT CASERTA, ITALY.

© 1874 SCIENTIFIC AMERICAN, INC.

breathing, and then subcutaneous injections of nitrate of strychnia to stimulate the heart's action. Finally the patient awoke, quite refreshed, thirty-two hours after swallowing the chloral.

A Good Disinfectant.

A very weak solution of permanganate of potash is an excellent disinfectant for light purposes, such as rinsing spittoons, neutralizing the taint of diseased roots, cleansing the feet, and keeping the breath from the odor of tobacco smoke. Permanganate is not poisonous.

A Preventive for Lead Poison.

Any soluble salt of lime (if plaster of Paris or gypsum is used, there should be added a little saltpeter or sal ammoniac) in the most minute quantity prevents the oxidation of lead in contact with water. Therefore it would be well to put a little chalk into wells which have leaden pipes, also in leaden beer pipes and other conduits, if people will use them. Perhaps it would be better to dip leaden pipes in a moderate solution of sulphuric acid (oil of vitriol) before using, and to dip the common soldered tin cans for fruit in the same, in order to form an insoluble coating of sulphate of lead. For, all wiseacres to the contrary, every good chemist knows that lead is easily oxidized by pure water, and still more so by water containing carbonic acid; and since lead is a cumulative poison, a very little of it at a time, taken into the system for weeks, months, or years, will be sure to produce some ugly disease, like neuralgia, painter's colic, hardened liver, or paralysis, the frequent foe of the aged.

Improved Mustard Poultice.

The *Medical Brief* says: In making a mustard plaster, use no water, but mix the mustard with white of egg, and the result will be a plaster which will draw perfectly, but will not produce a blister, no matter how long it is allowed to remain.

Anæsthesia.

At Bellevue Hospital, bromide of potassium, 30 grains previous to administering sulphuric ether and the same dose as soon as the patient can swallow after the administration, is now regularly resorted to. The effect is to prevent the vomiting which so commonly follows the use of ether.

THE CONVENTION OF THE CIVIL ENGINEERS.

The sixth annual convention of the American Society of Civil Engineers was recently held in Tammany Hall in this city. About 100 delegates appeared, representing the principal cities in the country. Colonel Julius W. Adams, President of the society, presided; and in the course of the proceedings, a memorial was adopted urging upon Congress the necessity and importance of a series of complete tests of American iron and steel. We give below abstracts of the papers read.

Captain James B. Eads said that

UPRIGHT ARCHED BRIDGES

can be more economically constructed for railroad purposes than is possible with the suspension system, no matter what the length of span may be. He said that it is entirely practicable to brace the upright arch more effectually, and with equal, if not greater, economy, than is possible by any known method of stiffening suspension bridges. By any method of girder construction hitherto known, it is impossible to span a clear opening of 500 feet with less than three times the dead weight of the arch in the proposed system, with equal strength of girder and with the same material and allowable strain.

The objection to the combination of wood and iron in bridge construction, owing to the difficulty of repairing the bridge, does not exist in this method. In all others, the wood is either under tension or compression, and therefore difficult to be removed without endangering the stability of that arch, or of any other one of the series; for it is plain that, if any temporary weight were placed on the floor which would equal the weight of the cords to be removed, the equilibrium of the whole series would be undisturbed by their removal so long as the whole bridge remained unloaded. In repairing, it would never be necessary, however, to remove any one cord entire at once, but only to replace such pieces as were found defective.

Mr. Francis Collingwood read a paper on the

ANCHORAGE OF THE EAST RIVER BRIDGE.

The front face of the Brooklyn anchorage is 930 feet back from the center of the tower. The length of the base is 132 feet, and extreme width, 119 feet 4 inches. It consists of a timber platform of three feet thickness, thoroughly bolted. Below this platform are bearers, placed longitudinally with about nine feet spaces, the bottom of these being at the level of high tide in the East River. The extreme size of the excavation at the bottom was 122 feet 4 inches wide at the rear, 112 feet and 4 inches at the front, and 135 feet long. This space had to be excavated entirely to a uniform level before the foundation could be started; and the problem was to so support the banks as to effectually prevent damage to surrounding property, and at the same time not have the bracing interfere with the free movements of workmen, or with lowering or placing the timber and stone in position.

All materials for the anchorage had to be brought 1,000 feet through crowded streets from the dock at the river, and it was also desirable to transport the same from the excavation to the yard at the pier for storage.

The form of the masonry throughout is in plan the same as that of the foundation, the stone work being set back 18 inches all around from the edge of the platform. There are a series of offsets at the bottom, but its general form in elevation is that of a truncated pyramid with sides battering above ground half an inch per foot rise The top of the masonry is also the grade line of the bridge, and has an elevation of 89 feet at front, and 85 feet 9 inches in the rear. The front portion is divided into three parts. The central of these will support and contain the two central anchor chains. Between this and the two exterior walls are spaces arched over to support the roadway above. Since diagonal braces could be used, this determined the use of two lines of through longitudinal bracing and six lines of through transverse bracing. At the intersections of the main lines, square timber piles were driven, before the excavation was begun, to a depth of about three feet below tide. The excavation was then started at the highest point, and the first stringer, etc., put in. After this was well under way, the second range of sheeting was started on the opposite side and ends, and before the pressure had become severe the braces between the heads of the piles were put in in each direction. In this way the work was carried down progressively, the excavation in the central portion being in every case the last removed.

THE EXCAVATION.

In driving the lowest range of sheeting, great difficulty was found in penetrating the fine, compacted sand below the water line. After trying several devices, it was decided to use a water jet. For this purpose a small rubber hose was provided, having a three quarter inch jet from pipe four feet long for a nozzle. This was attached to the city works, and by its use the planks were forced down very readily. Six inches below tide was the average depth driven. To overcome the last two feet of the excavation, it was necessary to pump the water out of the pit; and the question arose as to the size of pump required. To solve the question appropriately the following experiment was tried: A piece of 18 inch sewer pipe was set down into the sand at the bottom of the pit. The sand was then removed from the interior and the water bailed out. The time and depth below and top was then noted, and when nearly filled the time was again noted, together with the increase in hight. The average head under which the water entered did not exceed six inches, and it was thought that this would probably be as great as it could ever be around the sheeting, and, taking the relative perimeter of the two as a basis, to be pumped about 80 gallons per minute. At a time afterwards, when the pump was in regular working, the amount discharged was found to be 60 gallons per minute. This method would no doubt be safe in similar cases where no springs in the bottom were to be apprehended. The maximum pressure upon the sand underneath, caused by the complete structure, will be about 4 tuns per square foot.

The only remaining point of interest was the method taken to lower the four anchor plates into the pit. These were massive castings, 17½ feet by 16 feet and 2½ feet deep (over all), and weighing 53 tuns each. For this purpose, an excavation 20 feet wide, with slope of two to one, was made in the rear, and a hole cut through the sheeting. In this timber ways were laid, and two sticks were also bolted to each of the plates, for sliding pieces. They were then lowered by tackle without trouble.

Abstracts of several other interesting papers will be given in our next.

Metallic Bedsteads.

The works of Mr. S. B. Whitfield are situated in Watery lane, in the Coventry road, Birmingham, Eng. They are called the Gladstone works, and occupy about 3,000 square yards, of irregular parallelogram, and are built on three of the sides.

First, we go into the cutting shop. Here the angle iron, round irons, and rods are cut into the lengths required for the parts of the bedstand. As many as 200 or 300 different lengths are required for the various parts. The rods are brought in bundles, and are cut by a machine worked by steam, as many as five rods being cut by one movement of the cutting press. These are for scrolls and other ornamental parts of the bedsteads. When the angle rods have been cut, they are then stamped straight by hand-worked presses. They are next passed to lads by whom they are studded, and on these studs the laths are put when the bedstead is made up. All these processes are executed with great precision, as all the parts of the same kind of bedstead are interchangeable, and the greatest exactitude is required in every part of the work.

From the cutting shop we pass to one of the galleries, of which there are two overlooking the casting shop. In the first gallery the rods, having been cut and studded, are brought to be bent into the various forms required by the pattern. This process is exceedingly simple. The pattern for the scroll or other design is placed in a vice and the rods are placed around it, the iron lengths used being either plain or bended, according to the design. In this gallery the iron is bent into shape for the bands or the bottoms of the bedsteads. In every case the work has to be done with great nicety, as every one must correspond with the rods with which they are to match. This department is very properly named the bending gallery, and every visitor will be struck with the beauty of many of the curves produced, and the elegance of many of the designs and patterns.

After having been bent, the various parts of the head and foot are taken into the casting shop, which is, of course, on the ground floor. These are placed on a frame, and the end of each of the parts is placed in a chill; in some elaborate patterns more than twenty chills are used. Into these chills is poured the molten metal, and from the pattern cast in them is produced the flowers, knobs, and other ornaments which are seen at the various points of jointure. As soon as this process has been performed, we have a head or foot, as the case may be, completely produced. This is the method of casting all the parts together, the invention of which produced quite a revolution in the trade. As soon as the metal is poured in, the chills are opened, and the work is ready for chipping. This process is done by hand, and by it the casting is cleaned of all superfluous bits, and thus made ready for the next operation. In this part of the premises all the casting is done. The sockets, into which the dovetails and ends of the angle iron are placed, are cast on the corners of the posts. This is done while the parts are still in the frame. The furnace is funnel-shaped in the inside, and is charged with coke and pig iron in the proper proportions, and the metal is taken from it in pots and carried to the various parts required by the casters. The casting finished, and the work chipped of the bits of metal which are left by the casting, it is ready for japanning and painting.

Before passing to this part of the works, we visited the stock room. This is not so called from its containing the stock in the ordinary name, but in a technical sense. A stock in a bedstead manufactory is a die or pattern, for producing the ornaments for the tops of the pillars and other parts of the bedstead. In fact a chill may also be called a stock, as both are patterns and dies by which the ornamental parts are produced.

In the top gallery, folders, chairs, and cabinet bedsteads are made. Here we saw some which would either serve for a chair, a sofa, or a bed. As a chair, you can, by adjusting a small check, obtain any inclination you wish. By a very simple arrangement, you can unfold it and make it into a bed. Having used it, it can be folded up into so small a space, and is withal so light and portable, that a not very strong man could carry his chair and bed about with him wherever he pleased.

PAINTING AND JAPANNING PROCESS.

We now pass into the japanning and painting. This work is carried on in separate shops, each mode of decoration requiring stoves of a different temperature. The common, or black japanning, is done on the ground floor. The bedsteads are taken from the casting shop, and then covered with a coating of black japan and placed in large stoves, or rather heated iron rooms, where they are subjected to a temperature of 250°. In the second or upper room, a better kind of work is done, and a green, a maroon, and other colors are employed. In this work the heat required for fixing purposes is still very intense, but much less so than for black japanning. In the top room the more artistic painting and ornamentation is done, and a still lesser temperature is required, often not exceeding 100°. This is a very pretty process. The designs in metal are made on slips of paper, which are fastened on the scroll, or pillar, or rail, to be ornamented. The pattern is then washed, and the paper comes off, leaving the design in gold and colors on the bedstead. The ornamentation is in gold and colors, and some of the designs are very beautiful and elaborate. Some of the work is decorated by hand. After the painting, the parts are placed in the oven to fix the colors.

From the painting and japanning rooms, the articles, now finished, are taken to the wrapping rooms. The best goods are wrapped in paper, the head and the sides and laths being made into different parcels. The inferior work is only partly prepared, and then banded up with straw, and sent away to various destinations. The more delicate work is packed in skeleton cases. Every bedstead is put together and tested before it leaves the works.

One very careful kind of work is stamping the holes in the laths for making the iron racking. These are flat slips of iron cast to the required length. The hole at one end is stamped out by a hand press. In stamping the hole at the other end great accuracy is required, and it has to be done by gage. If this were not most carefully executed, the result would be that the latter would not fall into the studs on the sides or angle irons. They invariably do so, however, so nice is the adjustment of the parts. This done, the stud has only to be screwed down, and the bed is made, no keys being used in putting up metallic bedsteads.

From the wrapping rooms we passed to the fitting shop, in which also all the stocks and chills are made. This is one of the most important departments of the works. Here the design for the pattern of a stock is made in wax, then the model is taken in plaster of Paris, and from this the stocks are made. The utmost care is required in planing, turning, and cutting the various parts of a stock; for unless everything is made to fit and work into the nicest exactitude, the stocks will not close on the ends of the different parts which are to be joined together by casting. It is in this shop, in fact, that the bedstead is made. The various parts of a head or foot are placed on a frame, and then the stocks are tried, and every defect removed, until each one is in perfect working order. Here also are made the molds in which are cast the dovetail joints for the corners. In this room the nick in the top of the studs is cut, and the machine employed in this work acts with such facility and ease that the work is done by a girl.

TREATMENT OF BRASS FOR BEDSTEAD WORK.

Up to this time we have been engaged with the manufacture of iron bedsteads; we now turn to brass work, which is a distinct part of the trade. It is most interesting to witness the various processes through which this work passes. The framework of the bedstead is of iron, and the pillars, tubes, rails, and other parts are covered with a brass casing of not more than 1-64 inches in thickness. Some of the ornaments of the brass work are exceedingly elaborate and beautiful. A preceding writer has somewhat minutely described one part of this work; and as any account would be only a repetition of his words, we prefer to quote them. He says: "Entering the yard from Watery Lane, we find, in an open shed facing us, one stage in the manipulation of or

© 1874 SCIENTIFIC AMERICAN, INC.

namental brass work. A number of finely formed vases o excellent design have just been delivered from the bras foundery. They are, however, the reverse of sightly being of a dull, spotty, copper color. The workman has a number of bundles of them strung on wire, and is treating them to a series of baths of diluted aquafortis. The vases are first immersed in a weak solution, which removes earthy matter and the outer skin. They are then moved to a stronger solution, in which the liquid, while the brass is in the bath, bubbles violently, giving off a strong vapor of sulphuric acid gas: it is then moved to the third bath, and, after a few alternate plunges, is ready for drying, a wonderful transformation having taken place during the process, the final dip giving the article a beautiful but evanescent color. The precipitate in these baths is copperas, which is readily salable. Following the vases we have been referring to, we find that they are thoroughly dried in heated sawdust, when they are ready for the burnisher.

BRASS BURNISHING.

While the vases are being dried, we notice that some boys are very deftly filing the edges of brass castings, and learn that hundreds of boys are engaged at this work in Birmingham. One of the vases having been thoroughly dried is passed to the burnisher, who rapidly enhances its beauty greatly, by burnishing the shields and other projecting parts of the ornaments. His appliances are his burnishing tool, a Chartley Forest stone upon which to polish it, a solution of soda to keep his hands free from grease, and gall in which to dip the tool and help its slipping action. Gall is a very valuable commodity in Birmingham. From the burnisher the work is conveyed to the lacquering room. This part of the work is done very neatly and effectively by women, and is necessary, as may be known, to the preservation of the color of the metal and to the preservation of the surface indeed. Quick drying is essential here as in the painting room; and to provide this, the room is furnished with large flat-topped stoves, heated by gas, which obviates the smoke and dust that would be produced by stoves heated by coal. Brass tubes are lacquered upon an iron tube through which a jet of steam is passed. Any depth of tint can be given to the lacquer, but whether deep or light all brass work receives a number of coats. In this room we noticed a variety of brass bedsteads of very charming designs in twisted, taper, and plain pillars, with ornaments of great beauty."

About 200 people are employed by Mr. Whitfield in all the departments of the trade, and from his works bedsteads of every form and pattern, and of widely different prices, are sent to all parts of Great Britain. The works are admirably arranged, and every care has been taken for the comfort and convenience of the work people. The ventilation is admirable; the shops are large, lofty, and airy.—*Iron.*

A New Comet.

The inhabitants of this part of the world are likely, before long, to enjoy the evening entertainment of a brilliant comet, which is now barely visible in the western sky; but it is approaching the earth and sun with great velocity, and will soon be a conspicuous object in the heavens. This comet was first seen on the 17th of April, at Marseilles, France. It was discovered here June 8th, by Professor Lewis Swift, of Rochester, N. Y., who gives the following particulars:

"It is approaching both the sun and the earth with a constantly accelerated velocity, arriving at perihelion (nearest the sun) and perigee (nearest the earth) about the 1st of August. I see nothing, therefore, to prevent its being a very conspicuous and beautiful object in the western sky during the months of July and August. It is now situated, at 1

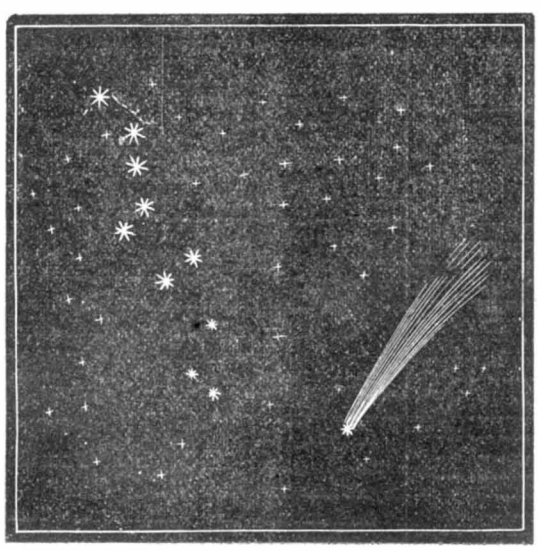

o'clock in the morning, directly beneath the polar star, and about twenty-five degrees from it, and is just visible to the naked eye. With an opera glass it can be easily seen as a hazy nebulous mass, with a bright point a little to one side. Through my telescope of four and one half inches aperture, six feet focus, it presents a, tail filling the whole field, with a low power of thirty-six. So directly toward us is it moving it seems almost to stand still, its slight deviation from it giving an apparent motion toward β *Ursæ Majoris*. It is now visible all night, but will soon be so only in the early hours of evening, setting in the northwest.

If at the time of its nearest approach to the earth the moon should be absent, we may expect, from present indications, to be treated with a cometary display which may rival the transit of Venus in popular as well as in scientific interest. The comet will be brightest on the evening of August 3, being then 245 times as bright as at the time of discovery, while now it is only 5¼ times as bright; and as the moon will be absent, it will be subjected to spectroscopic analysis under circumstances more favorable than may occur again in many years. It will then be about 5° from Denabola, the brightest star in *Leo*."

To assist those of our readers who are not versed in astronomy to find the comet, we give a diagram showing the seven bright stars forming what is commonly known as the Dipper, from which the observer will carry imaginary lines down to three smaller stars below the Dipper, thence obliquely to the right, where the comet will be found. Just at present a spyglass or an opera glass will be needed to assist the vision; but in a few days the comet's tail will stand out clearly, and a special search will be unnecessary.

Three Thousand Five Hundred Miles by Railway.

The new route between San Francisco and New York is thus composed:

	Miles.
Central Pacific—San Francisco to Ogden	878
Union Pacific—Ogden to Kearney	835
Burlington & Missouri River, in Neb.—Kearney to Hastings	40
St. Joseph & Denver City—Hastings to St. Joseph	226
Hannibal & St. Joseph—St. Joseph to Hannibal	206
Hannibal to Louisiana	25
Chicago & Alton—Louisiana to Chicago	275
Michigan Central—Chicago to Detroit	284
Great Western—Detroit to Suspension Bridge	230
New York Central—Suspension Bridge to New York	447
Across the Continent	3,446
TO BOSTON.	
San Francisco to Chicago	2,485
Chicago to Albany	818
Albany to Boston	201
	3,504

THE cheapest articles of which we have lately heard are alligators. A correspondent from the South says that you can buy them five feet long at Perry, Ga., for one dollar a piece.

ALUMINUM SILVER.—The following alloy is distinguished by its beautiful color, and takes a high polish: Copper 70 nickel 23, aluminum 7, total 100.

Recent American and Foreign Patents.

Improved Watch Escapement.

George H. Knupp, Wapakonetta, O., assignor to himself and Harvey Brokaw, same place.—To prevent overbacking, the notched end of an escape lever with curved arms is so arranged as to guide the pin of a balance wheel back into a notch when the trouble occurs.

Improved Children's Carriage.

A C spring is attached to the front axle, and extends back over the hind axle, to which it is also attached, and then springs by a large curve around the body, which is suspended from it. The body of carriage is provided with a portion which may be made to serve both as a dash and a table.

Improved Hoof Trimmer.

Frederick R. Sutton and William G. Sutton, Wellington, Ill.—This invention consists of a pair of side bars pivoted to a toe piece, and connected, at the heel, by a right and left screw, constituting a frame, to be clamped upon the hoof by screwing the side pieces against it. On the frame is a cutter fixed in slots in the aforesaid side pieces, and provided with a cranked screw for forcing it up to the toe piece, to shave off the bottom of the hoof. At the toe is a gage, to regulate the amount to be shaved off, and on one of the side clamping pieces is a contrivance for quickly releasing the clamping frame from the hoof in case the horse becomes restive.

Improved Cross Cut Sawing Machine.

David R. Carter, Rockport, Ky., and Thomas H. Carter, Bremen, Ky.—This invention relates to a mechanical contrivance whereby a cross-cut saw may be operated by hand mechanism to so much advantage that one man may be made to do the work of six, the whole device weighing but about one hundred pounds, and being conveniently portable to the timber.

Improved Carriage Door.

F. Herman Jury, New York city.—This is a door pull handle and a holder for the sash-holding strap, combined in one device, and so arranged that both purposes are subserved by the one device better than by the separate devices as commonly arranged. The invention also consists of a novel contrivance of the device for connecting the strap holder, which holds the sash-holding straps up out of the way of the door when it closes to said strap.

Improved Feeder for Grinding Mill.

John Phillips and John E. Bradford, Scranton, Pa.—This invention consists of a hopper of two or more compartments, and a feed shoe, with a special compartment and regulating gate for each compartment of the hopper, all so arranged that two or more different kinds of grain, meal, or other material may be fed separately from different compartments into the stones at the same time. The object is to mix different kinds of grain substances more regularly and with less labor than they can be in the ordinary way of first mixing them and then feeding them together.

Improved Mowing Machine.

Frank H. Bryan, Troy, N. Y.—This machine may be reversed at each end of the field for cutting forward and backward along one side, for side hills and other places where it is not convenient to go around the field. It is also designed to effect the changes merely by turning the horses and the truck around without requiring the manipulation of any part by hand, except the raising of a catch pin.

Improved Level.

Dr. John Thornley, Charlottesville, Va.—This invention relates to an improvement in the class of levels provided with a hinged base bar for indicating different grades by the adjustment or angle to the body of the level proper. The improvement consists in arranging the block or prop piece to slide between the hinged bar and an inclined plane formed on the base of the level, so that the bar will be adjusted at an angle to the base corresponding to the distance it moves over the inclined plane. Means are provided for clamping the sliding block at any desired point, and the base is graduated to indicate the grade. The block is also connected with the base and hinged bar by a screw and dovetailed groove.

Improved Grave Mound.

Joseph R. Abrams, Greenville, Ala.—This invention relates to means whereby the dome of a grave mound is adapted to graves of different lengths and sizes by fitting thereto successively increasing elliptical pieces.

Improved Cheese Mill.

Abraham C. Brinser, Middletown, Pa.—This invention consists in a cheese mill in which are combined a vessel having a partially perforated bottom and rotary grinder, whereby cheese or smearcase may be ground and delivered free of lumps and in a uniformly granulated condition

Device for Registering the Slipping of Locomotive Wheels.

James W. Boyle, of New Texas, Pa.—This invention consists of a couple of wheels or disks independent of each other, driven synchronously, one by the truck axle and the other by the driving wheel axle. They are arranged with a cam and ratchet mechanism, so contrived that, in case the driving wheel slips, and thus turns one of said pulleys faster than the other, the pawl mechanism will be caused to move the recording apparatures one degree for each turn of one wheel more than the other, and thus record the slip.

Improved Wheel or Vehicles.

Michael Mickelson, Ashland, Oregon.—By this device, a tire may be tightened without removing it from the wheel. The invention consists in the pieces or caps in combination with the tongue and socket blocks formed upon the ends of a cut tire, and with the wedge or key that draws said ends together.

Improved Grading Scraper.

Jonathan C. Smith, South Solon, Ohio.—This invention consists of a road, ditch, or grading scraper, having the front portion, which carries the blade, jointed to the body portion, and provided with springs and pushers adapted to tilt the blade down so as to run into the ground when the scraper is drawn along the surface. Latches and levelers are combined with the said jointed front part and the handles, to turn the blade upward to run out of the ground when a load has been obtained by pressing the handle downward. Cams throw the latches into connection with the levers so that the blade may be turned up when the handles are pressed down. The handles pass down below the spring catches, to be fastened to the body by the latter to raise the rear end to dump the scraper by causing it to ro over on the front end.

Improved Boiler Flue Cleaner.

John Dykeman, Green Island, N. Y.—This invention consists in the combination of three toothed rollers, whether made solid or of toothed disks springs, and levers with each other, and a box for cleaning the outer surface of flues; and in the combination of a loose arm and a set screw with a box that supports the toothed rollers, the springs, and the levers, to adapt the machine to be attached to the tool rest of a lathe. In using the machine, the levers and roller are turned back, and the flue to be cleaned is placed upon the rollers, and its end is secured to the chuck of the lathe The roller and levers are then turned down upon the flue, the necessary pressure is applied by the weight or spring, the lathe is set in motion, and the machine is fed forward with the feed screw, cleaning the flue thoroughly.

Improved Spring Brace.

Sidney T. Bruce, Marshall, Mo.—The brace is connected to the carriage body adjustably, by means of a slotted or grooved plate. The front half of this plate is bent downward to accommodate the pin above it. Thus the bottom and top of the front spring being both fastened to a common point behind, whatever depresses the body of the vehicle similarly depresses the free end of an inflexible bar, which cannot go forward so as to enforce a perpendicular motion of the carriage body. The bars being fastened to the springs at the top and bottom in front, and to each other a the center, no force can project the springs, either front or rear.

Improved Movable Head Light.

Horatio G. Angle, Chicago, Ill.—By suitable construction, as the truck of the locomotive turns in passing around a curve, the head light is also turned, so that the stream of light may always be thrown upon the track. The light from the lamp may also be thrown more or less from a straight line to adapt it to the curvatures of the road.

Improved Kettle Scraper.

Samuel A. Potter, Emaline Potter, and John Potter, Fowler, Ill.—This is a scraper plate with a round or otherwise shaped rear handle at one side and a pocket guard for the fingers at the other side.

Improved Apparatus for Making Torpedo Envelopes.

Mahlon Chichester, Shelter Island, N. Y.—The paper bags for torpedoes have been made, one at a time, with the aid of a piece of board having holes and a hand pin. The present invention consists in an improved apparatus whereby a number of bags are simultaneously made, the paper being cut with one motion, and pressed into the holes by another motion, for any desired number.

Improved Fare Box.

Joseph J. White, New Lisbon, N. J., assignor to himself and Howard White, Tullytown, Pa.—This invention relates to apparatus for collecting passenger fares on rail cars, and consists of a cash box supported from the waist or shoulders of the conductor, to which is attached a flexible tube, having at its end a hand piece or receiving box containing an endless carrier, which is arranged on pulleys, so as to be moved, by means of a ratche and pawl operated by a spring lever, by the conductor. The conductor carries a hand piece in his hand, and, by virtue of the flexible tube and belt, he is enabled to pass it round among the passengers to receive the fares.

Improved Furnace for the Manufacture of Iron and Steel.

Edgar Peckham, Antwerp, N. Y.—This is a new method and apparatus for manufacturing steel blooms directly from the ore. It consists in the furnace patented by the same inventor, June 24, 1873, improved so that it has two series of ore chambers instead of one, so as to treat the ore at different degrees of temperature to remove sulphur and phosphorus, and so that one series may serve for a flue to heat the ore in the other series when the coal is impure.

Improved Hatchet.

Guilford Norton, South Boston, Mass.—This is a combined claw hammer and hatchet. The bit has projecting threaded studs, by which it is connected with the hammer portion, so that, when worn out, it may be removed and a new one substituted.

Improved Folding Desk.

David H. Pierson, Fort Rice, Dak. Ter.—This desk is made in sections which are hinged together and so arranged that they fold together and form a compact body, resembling in shape and proportion an ordinary field desk.

NEW BOOKS AND PUBLICATIONS.

A TREATISE ON BRACING, with its Application to Bridges and Other Structures of Wood or Iron. By Robert Henry Bow, Civil Engineer. With 156 Lithographed Illustrations. Price $1.50. New York: D. Van Nostrand, 23 Murray and 27 Warren streets.

This is an excellent and very explanatory book on the whole question of arranging the parts of any construction so that they shall be as little as possible affected by variation in the strains to which the erection is subjected. As a matter of course, the building of bridges is very extensively treated, and the examples explained and illustrated show that the author is a writer of considerable knowledge and very varied experience.

THE INTERNATIONAL OR METRIC SYSTEM OF WEIGHTS AND MEASURES. By J. Pickering Putnam. Price 50 cents. New York: Hurd & Houghton, 13 Astor Place.

A very able *resume* of the recent progress of the metric system in popular favor. Although many of the arguments used by the advocates of the method are well known, and are generally deemed irrefragable, they will bear repeating till the world has adopted this most simple and rational arrangement of weights, measures, and coinage, which, it must be now everywhere admitted, is only a question of time.

THE KEYSTONE BRIDGE COMPANY'S ILLUSTRATED ALBUM, embracing Iron Bridges, Roofs, Columns, Chord Links, and Shapes, with a Description of Long Span Bridges Quality of Materials, and Principles of Construction Pittsburgh, Philadelphia, and St. Louis: Keystone Bridge Company.

An elegantly printed and illustrated volume, which contains not only a full and interesting description of the large means and business operations of the extensive firm who issues it, but also much explanatory and statistica information, formulas, etc., of great value to the engineering profession to whose notice we cordially commend it.

© 1874 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The Charge for Insertion under this head is $1 a Line.

Wanted—A reliable manufacturing firm to introduce and manufacture an improved lathe chuck. Patent for sale or disposed of on royalty. Address Fred. Van Fleet, Ithaca, N. Y.

For Small sizes of Screw Cutting Engine Lathes and Drill Lathes, address Star Tool Co., Providence, R. I.

A thorough Machinist and Draughtsman, an experienced foreman, desires employment. Address A. R. Wilson, Ludington, Mich.

Speed Counter, to carry in vest pocket. Every mechanic should have one. By mail, $2.10. Discount by the dozen. Samuel Harris, 119 West Washington St., Chicago, Ill.

Ice Machines.—Are there any machines made in this country which will manufacture ice in quantity to suit one or two families? And if such articles are in market, where can I get one? A. H. McClintock. Wilkes Barre, Pa.

Iron Castings, from 100 to 4,000 lbs., made at a low figure. Address Box 117, Saugerties, N. Y.

Varnish Maker Wanted—Address, with reference, John S. Holmes, Philadelphia P. O.

Windmill Makers, send circulars to Box 3062, P. O., Cincinnati, Ohio.

Clapboard Planer, used slightly, S. A. Wood's, for sale, $550. S. C. Forsaith & Co. Manchester, N. H.

Bone Mill Makers will please send their address to Wills Passmore, Fairville, Chester Co., Pa.

"Old Reliable" Drill Chucks, $3, $5, $7. Anderson Brothers, Peekskill, N. Y.

For Sale—25 Horse Locomotive Boiler, run 3 months. J. H. Baldwin, Meriden, Conn.

A practical mechanic in wood and metal, with genius and judgment, desires employment, temporarily or permanently; wood preferred. Address M. J., "World" Office, New York city.

Vertical Tubular Boilers, all sizes. Send for reduced price list to Lovegrove & Co., Phila., Pa.

Mechanical Expert in Patent Cases. T. D. Stetson, 23 Murray St., New York.

Sure cure for Slipping Belts—Sutton's patent Pulley Cover is warranted to do double the work before the belt will slip. See Sci. Am. June 21st, 1873, p. 389. Circulars free. J. W. Sutton, 95 Liberty St., N.Y.

Stencil Dies & Steel Stamps, all sizes. Catalogue and samples free. E. M. Douglas' Brattleboro', Vt.

For Sale or Exchange—A first class Gear Cutter with Brown & Sharpe's Index plate. Also a Bolt Cutter; will cut bolts to ¼ in. Wanted in exchange, Crank Planers. George Barnes & Co., Syracuse, N. Y.

Makers Woodenware Machinery, send circulars to P. O., Lock Box 630, New Orleans.

Models made to order. H. B. Morris, Ithaca, N. Y.

Linseed Oil Presses and Machinery for Sale. Perfect order. Very cheap. Wright & Lawther, Chicago, Ill.

Magic Lanterns for Public Exhibitions. Profitable Business, requiring small capital. Catalogues free. McAllister, 49 Nassau St., New York.

Nickel Plating—Pure Salts and Anodes of all Sizes on hand; Polishing Powders also for sale by L. & J. W. Feuchtwanger, 180 Fulton St., New York.

Gas and Water Pipe, Wrought Iron. Send for price list to Bailey, Farrell & Co., Pittsburgh, Pa.

Forges—(Fan Blast), Portable and Stationary. Keystone Portable Forge Co., Philadelphia, Pa.

Silicates of Soda, Soluble or Water Glass manufactured by us in all quantities for Paint, Artificial Stone, Cements and Soap. L. & J. W. Feuchtwanger, 180 Fulton St., New York.

Boilers and Engines, Second Hand. Egbert P. Watson, 42 Cliff St., New York.

Mills & Machinery for m'f'g Flour, Paint, Printing Ink, Drugs, &c. John Ross, Williamsburgh, N. Y.

L. & J. W. Feuchtwanger, Chemists & Drug and Mineral Importers, 180 Fulton St., N. Y., manufacturers of Silicates of Soda and Potash, Soluble Glass, etc.; Hydrofluoric Acid for Etching on Glass; Nickel Salts and Anodes for Plating.

For the very best Babbitt Metals, send to Conard & Murray, Iron and Brass Founders, 30th and Chestnut Sts., Philadelphia, Pa. Circulars free.

Taft's Portable Baths. Address Portable Bath Co., 156 South Street, New York city.

Iron Planers, Lathes, Drills, and other Tools, new and second hand. Tully & Wilde, 20 Platt St., N. Y.

For Surface Planers, small size, and for Box Corner Grooving Machines, send to A. Davis, Lowell, Mass.

The "Scientific American" Office, New York, is fitted with the Miniature Electric Telegraph. By touching little buttons on the desks of the managers, signals are sent to persons in the various departments of the establishment. Cheap and effective. Splendid for shops, offices, dwellings. Works for any distance. Price $5. F. C. Beach & Co., 263 Broadway, New York, Makers. Send for free illustrated Catalogue.

All Fruit-can Tools, Ferracute, Bridgeton, N. J.

Brown's Coalyard Quarry & Contractor's Apparatus for hoisting and conveying materials by iron cable. W. D. Andrews & Bro., 414 Water St., New York.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

Lathes, Planers, Drills, Milling and Index Machines. Geo. S. Lincoln & Co., Hartford, Conn.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

Hydraulic Presses and Jacks, new and second hand. E. Lyon, 470 Grand Street, New York.

Peck's Patent Drop Press. For circulars, address Milo, Peck & Co., New Haven, Conn

Small Tools and Gear Wheels for Models. List free. Goodnow & Wightman, 23 Cornhill, Boston, Ms.

The French Files of Limet & Co. are pronounced superior to all other brands by all who use them. Decided excellence and moderate cost have made these goods popular. Homer Foot & Co., Sole Agents for America, 20 Platt Street, New York.

Mining, Wrecking, Pumping, Drainage, or Irrigating Machinery, for sale or rent. See advertisement. Andrew's Patent, inside page.

Buy Boult's Paneling, Moulding, and Dovetailing Machine. Send for circular and sample of work. B. C. Mach'y Co., Battle Creek, Mich. Box 227.

Automatic Wire Rope R. R. conveys Coal Ore, &c., without Trestle Work. No. 34 Dey street, N. Y

A. F. Havens Lights Towns, Factories, Hotels, and Dwellings with Gas. 34 Dey street, New York.

Best Philadelphia Oak Belting and Monitor Stitched. C. W. Arny, Manufacturer, 301 & 303 Cherry St., Philadelphia, Pa. Send for circular

Steam Fire Engines—Philadelphia Hydraulic Works, Philadelphia, Pa.

Bone Mills and Portable Grist Mills.—Send for Catalogue to Tully & Wilde, 20 Platt St., New York.

Temples & Oilcans. Draper, Hopedale, Mass.

Dean's Steam Pumps, for all purposes; Engines, Boilers, Iron and Wood Working Machinery of all descriptions. W. L. Chase & Co., 93, 95, 97 Liberty Street, New York.

Emerson's Patent Inserted Toothed Saws, and Saw Swage. See occasional advertisement on outside page. Send Postal Card for Circular and Price List. Emerson, Ford & Co., Beaver Falls, Pa.

Iron Roofing—Scott & Co., Cincinnati, Ohio.

Price only three dollars—The Tom Thumb Electric Telegraph. A compact working Telegraph apparatus, for sending messages, making magnets, the electric light, giving alarms, and various other purposes. Can be put in operation by any lad. Includes battery, key and wires. Neatly packed and sent to all parts of the world on receipt of price. F. C. Beach & Co., 263 Broadway, New York.

Millstone Dressing Diamond Machines—Simple, effective, economical and durable, giving universal satisfaction. J. Dickinson, 64 Nassau St., N. Y.

Keuffel & Esser, largest Importers of Drawing Materials, have removed to 111 Fulton St., N. Y.

Portable Engines 2d hand, thoroughly overhauled, at ½ Cost. I. H. Shearman, 45 Cortlandt St., N. Y.

Engines, Boilers, Pumps, Portable Engines Machinists Tools. I. H. Shearman, 45 Cortlandt St., N. Y.

Rue's "Little Giant" Injectors, Cheapest and Best Boiler Feeder in the market. W. L. Chase & Co., 93, 95, 97 Liberty Street, New York.

For best Presses, Dies and Fruit Can Tools, Bliss & Williams, cor. of Plymouth & Jay, Brooklyn, N. Y.

[OFFICIAL.]

Index of Inventions

FOR WHICH

Letters Patent of the United States

WERE GRANTED IN THE WEEK ENDING

May 26, 1874,

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

Alarm, measuring can, E. A. Temple 151,324
Alkali, caustic, G. Thompson (r) 5,886
Anchor, A. H. Cobb 151,276
Animal and other life, destroying, G. M. McGehee 151,304
Asbestos, treating, A. J. Bartholow 151,345
Auger bits, forming, W. Tucker 151,325
Bale tie, A. S. Armstrong 151,191
Bale tie, cotton, E. Grant 151,281
Bayonet, spade, Metcalfe & Chillingworth 151,238
Bed bottom, H. D. Eddy 151,211
Bee hive moth trap, W. J. & A. H. McCoy 151,414
Bell pull, J. Collins 151,356
Bells, operating door, I. H. Abell 151,334
Belt tightener, G. Walker 151,256
Binder, temporary, A. Peck 151,427
Blower, steam, T. B. Field 151,374
Boat, life, Keeler, Updike, & Longyear 151,400
Boiler, division steam, T. Angell 151,190
Boiler, hot water, J. D. Keeler 151,294
Boiler, steam, C. H. Haswell 151,284
Boiler tube attachment, J. C. Kilgore 151,402
Boiler injector, Ryner *et al* 151,440
Boot soles, etc., drying, Jeffers *et al* 151,225
Boot soles, burnishing, I. E. Trepanier 151,225
Boot, protecting welt, J. L. Joyce 151,397
Boots, making, J. Lanham 151,296
Boring bit, C. C. Tolman 151,450
Box, blacking, W. F. Redding 151,433
Bricks, coloring, A. Hall 151,387
Brush, paint, F. Hubbard 151,233
Buckle, suspender, S. Oppenheimer 151,422
Burial casket, B. D. Stevens 151,321
Burner, gas, J. Ellis 151,369
Burner, lamp, A. Barker 151,195
Camera attachment, solar, D. A. Woodward 151,462
Can, measuring, Barney & Daily 151,344
Candle holder, miner's, N. Larsen 151,297
Car axle box, L. Schulze 151,247
Car axle box, T. S. Tincher 151,251
Car brake, electromagnetic, F. F. A. Achard 151,335
Car coupling, T. Andress 151,340
Car coupling, Baker & Mattfeldt 151,194
Car coupling, M. E. Bromeling 151,271
Car coupling, W. D. Rinehart 151,244
Car coupling, W. Todd 151,252
Car replacer, J. R. Wilds 151,331
Car starter, S. Jones 151,293
Car starter, D. Milliken 151,308
Car stock, S. W. Remer 151,434
Car truck, T. K. Birgess 151,267
Cars, condenser for steam, A. G. Buzby 151,358
Carbureter, M. Horning 151,392
Carpet stretcher, E. L. Baker 151,198
Carriage jump seat, L. W. Blessing 151,349
Carriage wrench, W. F. Rowe 151,315
Carriages, spring for children's, J. G. Field 151,373
Cartridge, E. Jones 151,396
Cartridge, shot, C. Weldon 151,327
Chains, connecting links of, W. F. Davis 151,362
Chair fan, rocking, G. M. Tope 151,451
Chopper, meat, Hagen & Burkholder 151,220
Churn dasher, T. Mathias 151,234
Churn power, W. Maurer 151,302
Cigar mold, B. Hawkins 151,390
Clamp, scaffold, Gudenoge & Pollock 151,282
Clothes dryer, D. L. Huff 151,289
Cock, stop, J. C. Kilgore 151,401
Cooler, beer, W. Woerle 151,261
Core box, J. B. Aston 151,342
Cornice, T. J. McGeary (r) 5,884
Corset, J. Bowers 151,269
Corset, J. Bowers 151,270
Crib, folding and rocking, O. Nailer 151,312
Cutter head, W. T. Smith 151,446
Cutter, meat, D. W. Garst 151,378
Delivery apparatus, W. Bullock (r) 5,887
Dental coffer dam clamp, C. Bancroft 151,265
Dentists and jewelers, file for, E. Maynard 151,413
Derrick, C. Roberts 151,313
Designs on stone, etc., sunk, J. Frost 151,375
Door check, G. C. Idley 151,395
Door step seat, S. M. Marshall 151,411
Dress elevator, M. Dewey 151,205
Drill, grain, W. Weusthoff (r) 5,889
Drilling machine, metal, Silver & Fawcett 151,444
Earthenware, culinary, W. A. H. Schreiber 151,246
Embossing roll patterns, C. Grasser 151,213
Engines, valve gear for, E. Penney 151,212
Fence post socket, Lord & Ayers 151,300
Filter, C. Andersen 151,339
Fire arm, breech loading, O. Whitney 151,453
Fire escape, Gillett, Sill, & Crawford 151,379
Fire escape, H. Stibbs 151,448
Fish hook, trolling, Huard & Dunbar 151,394
Fruit dryer, A. S. Edgett 151,366
Fruit dryer, J. W. McPherson 151,416
Fruit jars, holder for filling, J. F. Webber 151,257
Fruits, etc., preserving, L. A. Sicard 151,443
Fuel, compound for, C. C. F. Otto 151,424
Furnace, air heating, J. P. Hayes 151,285
Furnace chimneys, hood for smelting, J. R. Egar. 151,279
Furnace, tinners' and plumbers', J. P. Hayes 151,391
Gage, mercurial proof, B. E. J. Ells 151,367
Game apparatus, C. E. Marshall 151,410
Gas governor, Potter & Hayton 151,428
Gas, making water, W. Harkness 151,288
Gas purifier, Audouin & Pelouze 151,263
Gas regulator, C. H. Edwards 151,210
Gate, automatic, J. S. Winsor 151,350
Governor for water wheels, H. D. Snow 151,319
Grain binder, J. H. Whitney 151,459
Grain, etc., unloading, L. D. Woodmansee 151,262
Graining transfer plate, R. A. Adams 151,337
Handcuff and shackle, J. J. Tower 151,452
Harness saddle, V. Borst (r) 5,883
Harvester, W. M. & G. H. Howe 151,393
Harvester, J. Werner, Jr 151,328
Harvester binder, P. F. Hodges 151,288
Harvester binder, W. Wheelock 151,329
Harvester guard finger, C. Appleby 151,341
Hatchway, self-closing, W. H. Brock 151 199
Hogs, apparatus for scalding, H. Strycker 151,322
Hook, box and bale, J. M. Knight 151,295
Horse detaching device, W. Rosenbaum 151,314
Horse power, L. R. Faught 151,218
Hose, hydraulic, J. Greacen, Jr 151,383
Hose tubing, etc., antiseptic, J. Murphy 151,418, 151,419
Hydrant, J. V. S. Miskelly 151,417
Insect destroying compound, E. Severns 151,317
Insects, destroying, W. B. Royall 151,439
Ironing board clamp, H. Bosch 151,350
Jack, lifting, M. Durnell 151,365
Journal box, I. D. Mathews (r) 5,892
Journal boxes, lubricating, J. F. Light (r) 5,891
Kettle, tea, T. Graham 151,381
Ladder, fireman's, T. Pritchard 151,429
Lamp, A. Syverson 151,250
Lamp bowl handles, D. C. Ripley 151,435
Lamp, lard, C. A. Gabe, Sr., *et al* 151,376
Lamp lighter, head, S. M. Davies 151,361
Land roller, J. Woolridge 151,332
Latch, reversible, W. E. Sparks (r) 5,885
Lathe, L. H. Dwelley 151,208
Lathe chuck, metal, B. Lewis 151,298
Lock, H. Winn 151,461
Locks and latches, strike for, J. Davies 151,359
Locks, tumbler for permutation, H. W. Covert 151,277
Loom, narrow ware, W. Gregory 151,385
Loom, needle, J. H. Greenleaf 151,384
Lubricating compound, R. Fitzgerald 151,214
Lumber, loading and unloading, Tothammer *et al*. 151,253
Measure, liquid, J. H. Eyrse 151,372
Mechanical movement, A. Warth 151,457
Meter, gas, J. W. Drummond 151,207
Meter, liquid, J. M. Blanchard 151,196
Mill, cider, H. L. Whitman (r) 5,890
Mill, rolling, J. Swan 151,449
Mill shoe, quartz, J. G. Kittredge 151,403
Mill, smut, G. W. McNeil 151,415
Mill, triturating, C. P. Alsing 151,338
Miter box, H. C. Hough 151,222
Mitten, J. L. and J. H. Whitten 151,460
Molding machine, foundry, McGregor *et al* 151,305
Molding plastic materials, H. Brooke 151,352
Mop head, T. K. Knapp 151,404
Mortising machine, A. Borneman 151,268
Nail, picture, C. B. Jenkins 151,226
Nozzle, spray, G. E. Jenks 151,227
Omnibus, C. M. Murch 151,240
Ore crusher, T. and J. Clifford 151,275
Padlock, J. McNelley 151,306
Paper bag machine, W. F. West 151,258
Paper perforating punch, G. W. McGill 151,23
Pavement, H. S. S. Copland 151,358
Pen and pencil case, W. A. Ludden 151,230
Pen holder, G. W. Jolly 151,292
Pencil sharpener, E. M. Crandal 151,278
Photographs, burnishing, E. R. Weston (r) 5,888
Photograph plate holder, D. H. Cross 151,201
Pianoforte hand guide, W. O. Brewster 151,198
Pipe pattern molding, J. B. Aston 151,343
Pitman to wheels, connecting, J. M. G. Mouck 151,310
Planter and distributer, Asay & Wood 151,192
Planter and distributer, J. W. Harbin 151,388
Plow, J. Kuenzel 151,229
Plow, gang, G. J. Overshiner 151,425
Plow, weed turning, A. Smith 151,249
Press, baling, P. K. Dederick 151,208
Printer's quoin, E. A. Warren 151,455
Printing press, G. B. Sarchet 151,441
Pumpgearing, J. W. Douglas 151,364
Pump, steam and vacuum, H. S. Maxim 151,235
Pump valve chamber, G. B. Markle 151,409
Railway rail joint, H. M. Garside 151,377
Railway rail joint, A. B. Johnson 151,290
Refrigerator, transporting, S. G. Bilyeu 151,347
Rein terret, J. J. Wightwick 151,330
Rolling mandrel tubes, S. P. M. Tasker 151,323
Roundabout, S. L. Bolton 151,197
Safe, fireproof, J. W. Warner 151,454
Sash holder, E. P. Masterson 151,233
Sash pulley, S. E. Maxon 151,303
Sausage stuffing machine, C. Forschner 151,280
Saw, H. Disston 151,363
Saw mill head block, D. Rawson 151,432
Saw set, S. Bartlett 151,266
Saw swage, J. E. Emerson 151,370
Saw teeth, J. E. Emerson 151,371
Saw teeth, J. R. Luce 151,407
Saw frame and guide, A. D. Clark 151,355
Sawing machine, band, E. F. Gordou 151,217
Sawing machine, circular, O. T. Gronner 151,386
Sawing machine, stone, Heermans & Reed 151,286
Scale, platform, H. Paddock 151,241
Seat, school, S. R. Ruckel 151,245
Sewing machine, C. F. Bosworth 151,351
Sewing machine, J. Buhr 151,272
Sewing machine, H. and J. Lomax 151,406
Sewing machine, Steinbach & Ready 151,320
Sewing machine, button hole, J. J. Graff 151,380
Sewing machine fan, W. S. Elliott 151,368
Sewing machine fan, Jackson & Smith 151,224
Sewing machine hemmer, S. A. Davis 151,202
Sewing machine treadle, D. E. Lillie 151,299
Sheet metal, cleaning, Paul & Schug 151,427
Ship's knee, W. Morehouse 151,309
Sifter, flour, D. W. Marvin 151,232
Signal and buoy, J. J. Kane 151,398
Silica, dry soluble, R. Guenther 151,291
Siphon and filter combined, W. W. Grant 151,382
Sizing cotton yarn, compound for, H. Wegmann 151,326
Sled blake, A. Blackstone 151,348
Soda, etc., making sulphate of, Hargreave *et al* 151,389
Speculum, surgical, R. Knaff 151,228
Splints, machine for making, A. F. Scow 151,248
Square, carpenter's, J. A. Traut 151,254
Stalk cutter, H. Herrold 151,287
Stencil, A. F. Comings 151,357
Stool and foot rest, combined, J. Odenbaugh 151,421
Stove, J. Smith 151,445
Stove grate, D. H. Erdman 151,212
Stove, heating, D. C. Proctor 151,420
Stove pipe shelf heater, J. H. Mears 151,237
Stoves, heat radiator for cooking, P. Adams 151,336
Strainer, S. W. Rowell 151,438
Suspenders, F. A. Garnier 151,216
Table, etc., for games, folding, T. J. Whitcomb 151,259
Telegraph and perforator, automatic, T. A. Edison 151,209
Textile and other material, cutting, A. Warth 151,456
Tobacco bag attachment, J. W. Chambers 151,354
Tool handle, Morgan & Reid 151,239
Toy, J. Deuell 151,204
Trap, sink, G. Miller 151,307
Trunk, fastener, J. Heiser 151,221
Truss, anal, W. Shields 151,318
Valve, hydrostatic, J. Osborn 151,423
Valve, stop, J. Ross 151,437
Vehicle axle, W. Beers 151,346
Vehicle brake, E. G. Lunceford 151,408
Vehicle spring, E. Chamberlin 151,274
Vehicle wheel, R. W. Davis 151,360
Vehicle wheel, S. Downey 151,206
Vehicle wheel, O. Lundin 151,301
Vehicle wheel, F. Seidle 151,442
Vehicles, shifting seat for, W. M. Knapp 151,405
Vermin suffocator, L. Mast 151,412
Vessels, center board for, J. W. Campbell 151,273
Vessels, center board for, J. Rand 151,431
Washing machine, J. L. Austin 151,264
Washing machine, F. W. Robertson 151,436
Washing machine, S. R. Ruckel 151,316
Washing machine, Spangler & Reich 151,447
Watch chain, safety guard, R. A. Johnson 151,291
Watches, mainspring indicator for, G. P. Reed 151,213
Watchmaker's tool, J. F. Young 151,333
Water wheel, E. B. and W. P. Lyon 151,231
Weaver's spool, H. H. Bryant 151,200
Welding and forming couplings, G. H. Fox 151, 15
Windlasses, gearing for, D. E. Myers 151,420
Windmill, G. A. Myers 151,311
Windmill wheel hub, Keeler & Harris 151,399
Wire, flyer for winding bonnet, etc., E. H. Tyler 151,453
Wood, bundling kindling, F. Myers (r) 5,893

APPLICATIONS FOR EXTENSIONS.

Applications have been duly filed and are now pending for the extension of the following Letters Patent. Hearings upon the respective applications are appointed for the days hereinafter mentioned:

29,760.—HAMMER.—R. Boekler, August 5.
29,785.—SEWING MACHINE.—D. Haskell. August 12.
29,789.—CULTIVATOR.—E. S. Huff. August 12.
30,415.—GAS REGULATOR.—J. G. Leffingwell. Sept. 30.

EXTENSIONS GRANTED.

28,469.—HORSESHOE.—R. A. Goodenough.
23,479.—MAKING TUBE JOINTS.—S. J. Hayes.
28,482.—COOKING STOVE.—J. C. Henderson.
28,482.—COAL STOVE.—J. C. Henderson.
28,483.—SEEDING MACHINE.—S. T. Holly.
28,488.—RATTAN MACHINE.—J. Hull.
28,495.—SKATE.—J. Lovatt.
28,512.—CAR WHEEL.—S. P. Smith.
28,517.—STOCK CAR.—L. Swearingen.
28,537.—PAPER BAG MACHINE.—S. E. Pettee.

DISCLAIMERS.

28,482.—COOKING STOVE.—J. C. Henderson.
28,495.—SKATE.—J. Lovatt.
28,537.—PAPER BAG MACHINE.—S. E. Pettee.

DESIGNS PATENTED.

7,452.—FAUCET HANDLE.—J. G. L. Boettcher, Br'klyn, N. Y.
7,453.—FINGER RINGS.—F. Bohnenberger, N. Y. city.
7,454.—DRAWER PULL.—J. Girard, New Britain, Conn.
7,455.—FUR CLOAKS.—C. Hülster, New York c
7,456.—STOVE.—J. S. Perry *et al*., Albany, N.
7,457.—STATUARY.—J. Rogers, New York city.
7,458.—SALT BOX.—F. Schneider *et al*., Chicago, Ill.
7,459.—BUCKLE.—S. G. Sturges, Newark, N. J.
7,460.—MOLDINGS.—J. Nonnenbacher, New York
7,461.—COOK STOVE.—J. R. Painter, Reading, Pa
7,462.—RUCHES.—A. A. Rockwell, New York city

TRADE MARKS REGISTERED.

1,800.—WRINGER.—Empire Wringer Co., Auburn, N. Y.
1,801.—MOSS.—Ferguson & Haber, New Orleans, La.
1,802.—WATCHES.—Lingg & Bro., Philadelphia, Pa.
1,803.—MATCHES.—F. Mansfield & Co., St. Louis, Mo.
1,804.—SHIRTS.—Neustadter & Co., New York city.
1,805.—GRINDING MILLS.—Straub Mill Co., Cincinnati, O.
1,806.—OIL FROM PETROLEUM.—Standard Oil Co., Cleveland, O.
1,807 to 1,810.—SHIRTINGS.—Wamsutta Mills, N. Bedford, Ms

COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On Army Ants. By J. S. D.

On the Boiler Explosion at Philadelphia. By C. and G.

On Doubling the Value of the Currency By J. H.

On Botanical Scraps. By S. C. Y.

On the Insurance Question. By F. A. M.

On an Ear Trumpet. By J. E.

On Engineering Tables. By W. Z.

On Sun Stroke. By E. S. G.

On White Ants. By T. H.

On the Westinghouse Brake. By F. G. W.

On Bullets Impacted in the Air. By H. A.

Also enquiries and answers from the following:

I. X. L.—L. M. B.—J. H. J.—W. M. R.

Correspondents in different parts of the country ask Who makes a hoisting apparatus to be run by water supplied by city waterworks? Who makes portable canvas boats? Makers of the above articles will probably promote their interests by advertising, in reply, in the SCIENTIFIC AMERICAN.

© 1874 SCIENTIFIC AMERICAN, INC.

ILLUSTRATIONS.

A

Agassiz, a letter from Professor 85
Agassiz, the late Professor 7
Air pressure, noting the effects of, Berl's apparatus 409
Anvil at Perm, Russia, the great.. 247
Atacca cristata, the..... .. 327
Atomizer, Gerard's..... 18
Attraction of the earth and the sun, the relative..... 164
Auger, Monson's..... 102

B

Bale fastener, Starr's..... 39
Balloon ascent of MM. Sivel and Croce-Spinelli 391
Barrel head, Hanvey's..... 86
Barrel-making machinery, Holmes' 191, 194
Barrow-in-Furness, the factories of.....22, 23
Battery, floating, Allan's..... 98
Baxter, William 353
Bearing for shafting, Hardy & Co.'s 118
Bell signal, railway, Schepper's.. 278
Belts, elasticity of..... 291
Bench jack, adjustable, Wardwell's 54
Bird of Paradise, a new..... 215
Bisulphide of carbon, making.... 283
Blackboard, portable, Reber's.... 230
Boiler and method of burning fuel, Casement's..... 135
Boiler explosion, recent 260
Boiler, sectional, Renshaw's..... 367
Boiler, the Albion, Eberhardt's.. 319
Bolt cutter, Wood's..... 237
Boot, wire cloth, Sommerville's.. 374
Boring machine, Combined Power Co.'s 290
Bottle, Odell's 210
Brake, automatic, Harrington's.. 6
Brick, ornamental..... 253
Bridge and Fulton Ferry House, Brooklyn, the East River..... 63
Bridge at Albany, N. Y., the Hudson River Railroad..... 146
Bridge at Czernowitz, Austria, Iron..... 51
Bridge at Keokuk, Iowa..... 323
Bridge, London, England, the Albert 4
Bumper, car, Lloyd's..... 371
Butter cutter, Bleakley's..... 306
Butter former, Watson's..... 178
Butter-making process, Mot's.... 119
Butter-purifying process, Prentiss' 119
Butter worker, May's 387
Butter-working process, Kirchhöffer's 119

C

Cable, the new Atlantic telegraph 371
Calf feeder..... 147
Canal boat, steam, Baxter's..... 350
Canal, the Champlain ship, map of the..... 229
Candy cutter, Quinn's..... 70
Cane, physician's, Osborn's..... 86
Canopus stone, the..... 67
Car coupling, Stiles'..... 195
Car, steam, Baxter's 352
Casters, furniture, Sheldon's 6
Centennial tower, one thousand feet high, the..... 47, 50
Chair, electric and vapor, Hayward's 150
Chickens, fattening 354
Chimney guard, Schuyler's..... 86
Chronograph, Marey's..... 387
Chuck jaw, Horton's..... 242
Church at Clifton, England..... 359
Churn dasher, Boyd's 150
Claw bar, railroad, Christie's..... 278
Clepsydra or water clock, Rome, Italy 199
Cliff Ridge Span, Prospect Park, Brooklyn, the..... 231
Clock, the polar, Wheatstone's.. 338
Coffin, the late Professor..... 82
Comet, Prosper Henry's..... 34
Cooking vessel, Bodkin's..... 53
Coral æchmea, the..... 375
Cotton worm destroyer, Johnson's 118
Crane, overhead traveling..... 322
Cranes at Middlesbrough Docks, England, steam..... 71
Cremation furnace, Thompson's 295
Cribbing device, anti, Stilwell's.. 322
Currant washer, Oakley's 166
Curves and gear wheels, laying out 356

D

Devil fish, the Newfoundland.... 179
Diamonds, explosive..... 114
Dicksonia antarctica, the..... 327
Double tree, Case's..... 342
Drop hammer, friction roll, Hotchkiss & Stiles..... 374

E

Echinocactus myriostigma, the.. 327
Electric toy, Leach's..... 291
Electro capillary engine, the..... 195
Electro-plating balance, Roseleur's..... 66
Electro-plating, the utilization of copper scraps in..... 82
Elevator and conveyer, portable, Shanks'..... 255
Engine diagrams, pumping 257
Engine, hoisting, Todd & Rafferty's..... 375

F

Faucet attachment, McConnell's 178
Faucet, self-closing, Hotz's..... 358
Fence, picket, McGinty's..... 326
Fence, portable, Porter's..... 18
Fever tree, the Australian..... 103
File, newspaper, Whitehall's..... 355
Fire extinguishing apparatus, Schweizer's 207
Fireplace, ventilating, Galton's.. 99
Fish grappling spear, Knapp's... 147
Fish, the grass-eating..... 226
Freezing machine..... 54
Fuel economizer, Bell's..... 290
Furnace bridge wall, Beecher's.. 70

G

Gaining machine, Fay & Co.'s.... 102
Gang saw table, Carroll & Brother's..... 406
Gardening, house top..... 183
Gardens at Caserta, Italy..... 404
Governor, Matson's..... 241
Grapes, preserving bunches of... 147
Grate, clearing attachment for, Tiensch's..... 23.
Greenbacks, canceling..... 99
Grinder for castings, Miller's.... 1..
Gun, the 81 ton..... 33.
Gun, the improved Gatling..... 79

H

Hammer, Bilharz'..... 390
Hammer, drop, Merrill & Sons'... 223
Harrow, the tarantula rotary, Benson's..... 358
Hartford, Conn., the State capitolat 31
Hatchet, compound, Jenkins'.... 342
Heating and ventilating apparatus, Barker's..... 102
Hinge, safe, Stevens'..... 406
Horseshoe calk, Barnum's..... 179
Horseshoe, Todd's..... 342
Horse, the genesis of the..... 240
Hydrant, Davis'..... 406
Hydraulic engineering in Nevada 67

I

Ice cream freezer, Lucetti's..... 246
Ice-making machine, ammonia, Vass & Littmann's..... 243
Inkstand, inexhaustible, Teysonnière's..... 306
Insect case, De Nottbeck's..... 246
Iron and fireproof construction, Dennett & Co.'s..... 259
Iron process, Wilson's..... 35

J

Jointer, universal, Bentel & Co.'s 383
Jupiter's satellites..... 354

K

Knitting apparatus, electric..... 242

L

Lantern, signal, Quick's..... 198
Life raft, instantaneous..... 275
Lighthouses, modern American.. 293
Lightning rod, arranging a..... 347
Lightning rod, Munson's..... 262
Locomotive road and farm, Aveling & Porter's..... 335
Lounge and bath tub, combined, Wendel's..... 118

M

Magneto-electrical instrument.. 211
Mallet, Holbrook's..... 54
Mammillaria sulcolanata, the.... 327
Marking brush, Caron's..... 358
Measuring width of a stream 291
Mercury, Professor Leeds' method of purifying..... 131
Metaline 19
Metals, Thurston's tests of..... 38, 39
Microscopic aquarium, a..... 391
Mirror, polishing a parabolic..... 276
Mitering machine, Loetscher's... 278
Mitermachine and vise, Van Ness' 342
Mitrailleuse, Hotchkiss'..... 15
Moon as seen by earth light, the.. 87
Moon, total eclipse of the 101

N

Needle threader, Schofield's..... 178
Nelson, the late Judge..... 7
Nut lock, Dittman's..... 39

O

Oiler, portable, Crossley's..... 274
Orchid house, a modern..... 55

P

Packing and weighing machine, Stewart & Co.'s..... 310
Pail, butter and oyster, Gilberds & Harris'..... 163
Palæotherium magnum, the..... 210
Parallel motion, Veaucellier's... 371
Pendulum, horizontal, Zöllner's 179
Pen, font, Latourette's..... 178
Permanent way, Hilf's..... 130
Pipe cutting and threading machine, the Chase Manufacturing Co.'s 131
Pipes for buildings, flood, Harrison's 227
Pipe smoking, its effect on teeth 339
Plane guide, Snipe's..... 246
Planer, diagonal, Norris'..... 198
Planer, surface, Bentel & Co.'s.. 308
Plow, Riviere's..... 6
Porcelain at Vienna, the Worcester Japanese..... 5
Potato bug, the Colorado..... 306
Potato digger, Strait's..... 230
Practical mechanism.... 373, 389, 405
Pressure regulator for fluids, Casement's 127, 134
Printing press, the Augsburg..... 1
Problem, the man and horse..... 400
Proctor, Professor R. A..... 115
Propeller, marine, Browne's..... 103
Pruning shears, De Groodt's..... 39
Pump, cam, the Barney & Smith Co.'s 308
Punch and screwdriver, Lyons'.. 390
Pyrophone, Kastner's..... 279

R

Refrigerator, zero, Lesley's..... 227
Rifle hook..... 85
Riveting machine, hydraulic, McKay & McGeorge's..... 339
Rubber armor, Jones'..... 353

S

Safe, drill proof, Geering's..... 70
Sail, shadow 306
Saloon, floating, Allan's..... 98
Sash balance, the Shaker, Russell's 262
Saw gummer, Boyd's..... 150
Saw sets, circular and band, Grundy's..... 182
Saw teeth, movable, Miller's..... 130
Scaffold, adjustable, Dillon's..... 211
Scale, the diagonal..... 208
Scissors, combination, Van Hoosen's 274
Scissors, tooth-edged, Richardson's..... 210
Screw plate, lightning, Wiley & Russell's..... 226
Screw, wood, Ladd & Corning's.. 99
Seaforthia elegans, the 343
Siamese twins, the..... 115
Siamese twins, the autopsy on the 144
Silkworm, the yama-mai or oak tree 66
Sink, Miller's..... 143
Siren or fog horn..... 279
Skin grafting, Ladd's method..... 312
Slotting machine and tool, New York Engine Co.'s..... 175
Smith, Sir Francis Pettit..... 151
Solar attraction apparatus, Ericsson's 355
Sounding apparatus, Toselli's.... 194
Sound, the motions of Professor Tyndall's lecture on..... 162
Spike bar, Douglass'..... 194
Spoon, mixing, Clark's..... 342
Square, to make a T..... 165
Steam engine, domestic, Fontaine's 386
Steam generator, Mitchell's..... 239
Steam pump, direct-acting, Hardick's..... 310
Steam pump, Niagara, Hardick's 243
Steam street car, Grantham's.... 35
Stoker, mechanical, Smith's 274
Stove for smoke houses, Deardorff's 214
Strain diagrams..... 277, 307

T

Tar, separation of ammoniacal liquor from..... 258, 259
Tea, solidified, Spratt's..... 370
Telegraph post, the ribbon..... 117
Telegraphs, the English..... 114
Telescope, new and gigantic, Chapman's..... 159
Testing the strength of iron, Thurston's apparatus for..... 38
Thrashing machines, English.... 83
Threshold, adjustable, Wilson & Co.'s 210
Tool grinder, automatic, Conner's 182
Tool holder, Lamb's..... 18
Tool holder, Reder's..... 166
Tools, machine 373, 389, 405
Torpedo, Toselli's..... 86
Tower and clock, Delhi, India.... 399
Tramway and vehicle, Cass'..... 34
Trench brace, McKiernan's..... 131
Trotting gear, Schmalhausen's.. 18
Tube and disk problem..... 99
Tubing for mines 293
Tunnel-boring ram, a..... 111
Turbine wheel, Herriman's..... 214
Turbine wheel, Whitmore's..... 294
Turning crank pins and journals, machine for..... 402
Turtle with teeth..... 114

V

Ventilation of school rooms, the 49
Victoria Regia house, Chatsworth, England..... 151
Villa and garden, Egyptian..... 511

W

Wash boiler, Barnes'..... 103
Water meter, waste, Deacon's... 167
Well drill, Phillips & Golletz'.... 104
Wire way, transporting, Rogers' 374
Wheat steamer and dryer, Hunt's 370
Wheel, vehicle, Gardner's..... 291
Whip and rein holder, Matson's.. 246
Wigandia caracassana, the..... 327
Wind wheel and water elevator, Dietz' 402
Work holder, lathe, Hopkins' ... 326

Y

Young, James..... 95

Z

Zodiacal light, the..... 371

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Acaroid of resin..... 346
Acetate of lime..... 58
Acetic acid in wines..... 167
Acetone 107
Acoustic darkness and mental light..... 177
Acoustics of public buildings 324, 392
Acoustics, Professor Mayer on.... 356
Acre, a square..... 8
Adee, Mr. A. A..... 165
Adulterations of tea, coffee, and pepper..... 197
Advertising, good..... 82
Aerial navigation..... 388
Aerolite, a huge..... 145
Aerophore, the..... 132
African explorations..... 116
Agassiz, in the laboratory with.. 244
Agassiz, Louis *2, 7
Agassiz memorial, the..... 240
Agassiz, the autopsy of..... 96
Agassiz, the brain of..... 211
Air, floating matter in the..... 305
Air for respiration..... 43
Air, mechanical properties of.... 178
Air poison and its remedy..... 116
Air pressure and animal life.....*408
Air supply for miners and divers 85
Air, weight of..... 166
Akkas, the..... 305
Alcohol and fat..... 85
Alcohol and vinegar polyp..... 305
Alcohol, effects of..... 86
Alcohol, methylic..... 376
Alizarin, artificial..... 72, 197, 345
Alligators, cheap..... 409
Alloy for dental plates..... 85
Alloy for models..... 91
Alloying gold..... 138
Alloys, new iron..... 48
Alloys of metals, fusible..... 27
Alloy, white metal..... 368
Alumina from the clay to the sapphire 20, 36
Aluminum, preparing..... 66
Amalgamating zinc..... 27
Amazons, up the—Letters from Professor Orton..... 24, 40, 56
American cars in England..... 196
American inventions, the Germans and..... 344
American machinery in Germany 292
American river Nile, an..... 358
Americans, the aboriginal..... 116
Ammonia arsenite..... 282
Ammonia gas, absorption of..... 199
Ammonia, vapor of..... 43
Amylammonium chloride..... 181
Anæsthesia..... 408
Anæsthetic, new local..... 339, 388
Aniline color, a poisonous..... 34
Aniline colors..... 41
Aniline dyes, poisonous..... 100
Answers to correspondents.. 11, 27, 43, 56, 75, 90, 106, 122, 138, 154, 169, 186, 202, 218, 234, 250, 266, 282, 298, 311, 330, 346, 362, 378, 394
Antimony 282
Antimony blue..... 81
Ants, army..... 289
Ants of Brazil, the..... 340
Anvil, a 500 ton..... *247
Aquafortis for brick walls..... 394
Archæological discoveries..... 116
Arcturus, the star..... 379
Arithmetic, mental..... 68
Arsenical poisoning..... 394
Ashantees, art among the..... 321
Asian explorations..... 116
Asphalt pavements..... 148
Astronomer, honor to an American..... 192
Astronomical conditions of life. 256
Astronomical lectures, Proctor's *87
Astronomical notes.... 8, 84, 147, 216, 248, 292, 360
Atmosphere, the..... 27
Atomizer, improved..... *18
Attraction and centrifugal force 324
Attraction of the earth and the sun.. 68, 84, *164, 228, 245, 250, 291, 309, 324
Audition, the functions of..... 293
Auger, improved *102
Australian fever tree, the..... *103
Australian stupidity..... 150
Austrian Athenæum, new..... 114
Automaton, an..... 293

B

Bale fastener..... *39
Balloon advertising dodge, the.. 21
Balloon ascent in France..... *391
Ballooning extraordinary..... 280
Ballooning, perils of..... 292
Bamboo a poison..... 305
Barometer, frog 227
Baroscope, Babinet's..... 331
Barrel head..... *86
Barrel making machinery...*191, 194
Barrow-in-Furness, Lancashire, England..... *22, 23
Baryta, manganate of..... 118
Battery, acids for Daniell's..... 331
Batteries and saloons, floating... *98
Battery, bichromate..... 75, 203
Battery, Bunsen's..... 330
Battery, Bunsen's improved..... 340
Battery, continuous..... 379
Battery, Smee's..... 330
Baxter, William, and his inventions *351
Beach mining in California..... 131
Beard grow, to make the..... 283
Bearing for shafting..... *118
Bedsteads, metallic..... 408
Beech blight, a new..... 196, 245
Bee keeper's convention, the.... 8
Beer..... 401
Beer, the manufacture of..... 258
Bell signal for railways..... *278
Belts, elasticity of..... *291
Bench jack, adjustable..... *54
Bending wood..... 43
Beneficent Californian, a..... 389
Bird of Paradise, a new..... *215
Bisulphide of carbon..... *283
Bisulphide of carbon, uses of.... 144
Blackberry wine..... 122
Blackboard composition..... 91
Blackboard, portable..... *230
Blackboards..... 347
Blasting with dualin..... 59
Bleaching, improvements in..... 402
Bleaching wood tar..... 394
Blood, coloring matter of..... 370
Blood spots, the detection of. 58, 117
Blowpipe, use of..... 378
Blue, Egyptian..... 305
Boats, floats for..... 211
Boats, pleasure..... 59
Boiler and method of burning fuel..... *135
Boiler explosion, a..... 145
Boiler explosion at Philadelphia 340, 372
Boiler explosion commission, the 97
Boiler explosion, remarkable.... 50
Boiler explosions no mystery ... 224
Boiler explosions, preventing damage..... 150
Boiler explosions, recent....*260, 321
Boiler explosions, the SCIENTIFIC AMERICAN and..... 208
Boiler, patching a..... 267, 299
Boiler reflector..... 287
Boiler scale, analysis of..... 347
Boiler, sectional..... *367
Boiler, the Albion..... *319
Boiler tubes, destruction of..... 53
Bolt cutter—a correction..... 338
Bolt cutters, a novelty in..... *287
Bone dust, exporting..... 143
Boot, wire cloth..... *374
Borax for colds..... 133
Borax, octahedral..... 199
Boring machine..... *290
Boron, the green flame of..... 338
Bottle, patent..... *210
Brain and nerves, functions of... 293
Brain impressions on memory... 164
Brain, the double..... 218
Brake, automatic..... *6
Brake, the Heberlein..... 114
Brake, the Turner..... 81
Brake, the vacuum car..... 39
Brass..... 171
Brass, burnishing..... 409
Brass, dips for..... 266
Brass gun barrels..... 90
Brass work for bedsteads..... 408
Brazing iron..... 347
Brick, ornamental..... *259
Bricks, burning..... 91
Bricks with oil, burning..... 53
Brickwork, preserving..... 22
Bridge, Albany, N. Y..... *146, 147
Bridge anchorage, East river..... 408
Bridge at Keokuk, Iowa.....*323, 324
Bridge, a satin wood..... 355
Bridge at Poughkeepsie, N.Y..... 7
Bridge construction, iron *51
Bridge, excavation for East river 408
Bridge, London, England, the Albert *4
Bridge over the Alleghany, Pa.. 118
Bridge over the Saco, Me..... 196
Bridges, upright arched..... 408
Bridge, the East river..... *68
Bridge, the St. Louis..... 280
Bristles, a substitute for..... 101
Bronze green..... 58
Bronze, Japanese..... 289
Bronze on iron..... 266
Bronze powder..... 123
Bronzing..... 91
Bronzing iron castings..... 107
Bugs, roaches, etc., to kill..... 288
Building houses..... 267
Bunsen burner, a new..... 113
Burial in the sea..... 321
Burner and blower, new..... 53
Butter, artificial..... *119
Butter, coloring..... 119
Butter former..... *173
Butter from fat, making..... 119
Butter from little milk, much.... 53
Butter from whey *119
Butterine—artificial butter..... 392
Butter, refining..... *119
Butter worker..... *387

C

Cabbage, analysis of..... 282
Cables, laying ocean..... 8
Cables, the life of Atlantic..... 197
Cactus family, the..... 340
Calcium light..... 219
Calf feeder..... *147
Calming the sea with oil..212, 245, 288
Camphor for seeds..... 181
Camphor water..... 322
Canada, good work in..... 213
Canal, Hudson river and Lake Champlain 224
Canal navigation problem..... 52
Canal reward, the $100,000..... 81
Canals, heating the..... 370
Canals, steam on the.....64, 161, 309
Canal, steam on the Erie..... 344
Canal, the Champlain ship.....*229
Canal, the Suez.....119, 171
Cancer, new treatment of..... 296
Candy cutter..... *70
Cane, physician's..... *86
Cannon revolver, the Hotchkiss. *15
Cañon of Colorado, the..... 211
Canopus stone, the..... *67
Canthocamptus, the..... 395
Capitol at Hartford, Ct., the new. *31
Capitol, the iron dome of the..... 357
Car axles and bearings..... 254
Carbon for gunpowder, supply of 193
Carbonic acid, liquid..... 261
Carbonic acid on fires..... 267
Carbons, battery..... 11
Carbon, the hardest and softest. 256
Car bumper..... *371
Carbureting hydrogen..... 379
Car coupling accidents..... 196
Car coupling dangers..... 53
Car coupling, improved..... *195
Car coupling slaughters..... 98
Carmine..... 330
Carriages, splicing railway..... 55
Cars, freight..... 308
Car wheels, American..... 175
Casting bronze under pressure.. 136
Caterpillars, destruction of..... 82
Cattle, sickness among..... 49
Caveat rules, unauthorized..... 161
Caviare..... 198
Cedar wood cabinet..... 392
Cement, aquarium..... 274
Cement, boiler..... 310
Cement for aquariums..... 90
Cement for cast iron..... 283
Cement for coral..... 170
Cement for engine cylinders..... 347
Cement for mending rubber goods 208
Cement for metals and glass..... 298
Cement for millstones..... 346
Cement for oil pipes..... 75
Cement for whalebone..... 90
Cementing cloth to iron..... 347
Cementing glass to metal..... 27
Cementing paper to glass..... 203
Cement, turner's..... 315
Centennial, a chemical..... 357
Centennial, defeat of the grant for the..... 337
Centennial, everybody's..... 385
Centennial exhibition, the..... 296
Centennial, progress of the..... 17
Centennial subscription, the.... 288
Centennial tower, the.....*46, 50
Centralization of matter, the.... 184
Centrifugal force..... 122
Centrifugal force formula..... 378
Chainmakers' peculiarities..... 101
Chainmakers, the Troy..... 129
Chair, electric and vapor..... *150
Chameleons..... 225
Chaos to coral, from..... 321
Charcoal, animal..... 186
Charcoal and tar for wounds..... 66
Charcoal as a preservative..... 200
Charcoal for wounds..... 181
Checking, preventing wood from 288
Cheese factories in Vermont..... 232
Chemical experiment, amusing.. 375
Chemical industries, progress of. 113
Chemical notes..... 181
Chestnut leaves, fluid extract of. 360
Chicken, a golden..... 370
Chicken cholera..... 395
Chickens, fattening by machinery *354
Chicory in ground coffee 255
Chili international exposition, the..... ..145, 161
Chimney guard..... *86
Chloride of calcium..... 266
Chloride of gold 171
Chloride of gold for toning..... 182
Chocolate, adulteration of..... 305
Cholera..... 407
Chromes, adulterations in..... 117
Chronograph, Dr. Marey's..... *387
Chuck jaw, improved..... *242
Church at Clifton, England..... *359
Churn dasher, the victor..... *150
City of Peking, launch of the..... 209
Claw bar, detachable..... *278
Cleaning clothing..... 76
Cleaning hats..... 347
Clepsydra in Rome, the.....*199, 262
Clock tower at Delhi, India..... *399
Clock with 500 dials, a..... 263
Clothing from mildew, preserving 101
Clothing, the warmth of..... 376
Clouds, registering direction of.. 225
Coal..... 325
Coal, analysis of 43, 170, 266
Coal, combustion of..... 167
Coal dust, utilizing.....52, 148
Coals, the value of..... 8
Coal tar naphtha..... 27
Coal tar products..... 36
Coal, white..... 81
Cockroaches, exterminating..... 107
Cod liver oil bread..... 20
Coffee, analysis of..... 330
Coffee and milk as an aliment.... 214
Coffee as a disinfectant..... 375
Coffee grounds..... 385
Coin, wear of..... 72
Cold, the greatest possible..... 266
Collars, waterproof..... 180
Colorado cañons, the..... 293
Colorado desert, irrigation of the 198
Colorado desert, reclaiming the.. 309
Colorado mines..... 230
Combustion, gain in weight by... 246
Combustion of fuel..... 325
Comet, a new 272 *409
Comet, Prosper Henry's..... *34
Comets, a new idea about..... 147
Comets, a new theory of..... 53
Commerce of the world, the..... 376
Compasses, influence of carcoes on..... 48
Compass needle, a circular..... 117
Compound marine engines..... 165
Concrete construction..... 179
Concrete walls.....138, 218, 219
Condensation 267
Condensation in steam cylinders 279
Condensed wife, a..... 246
Conditions of life..... 401
Conductors of heat, etc..... 130
Conductors, the..... 280
Connecticut valley, the..... 53
Consumption, the curability of.. 36
Contractive energy..... 375
Convection, experiments in..... 117
Cooking vessel, improved..... *54
Cooperation, profits of..... 4
Copper alloys and ores..... 181
Copper in Minnesota..... 133
Coral æchmea, the..... 375
Coral, artificial..... 229
Coral, imitation..... 203
Corn salve..... 58
Corn, value of a kernel of..... 32
Cotton press, steam and hydraulic 115
Cotton raised by Indians..... 226
Cotton seed oil, refining..... 19
Cotton seed, the waste of..... 225
Cotton worm destroyer, the.....*118
Court plaster..... 107
Cow again, the $40,000 55
Cow, death of the $40,600..... 184
Cranes, overhead steam..... *71
Crane, traveling..... *322
Cremation furnace..... .....*295
Cremation question, the..... 273
Creusot, the works at..... 296
Cryolite glass..... 234
Crystals in plants, microscopic... 96
Culture, main force of..... 183
Currant washer..... *166
Curves and gear wheels, laying out..... *355
Cutting glass jars..... 331
Cyanide of potassium..... 154
Cyclones, the laws of..... .. 308

D

Darwinian theory, Agassiz on the *85
Dead subjects and live discussion 305
Death, a new sign of..... 241
Death, the detection of..... 69
Death valley..... 339
Decalcomania..... 43
Dental amalgams..... 130
Desert places, reclaiming the.... 256
Devil fish of Newfoundland, the 100, *179
Diamonds 234
Diamonds, explosive *114
Diamonds, South African.....241, 274
Diamond, the origin of the..... 97
Diffusion in moist and dry air.... 401
Discovery, possible future..... 407
Discovery was made, how a..... 241
Disease, bacteria in..... 261
Disinfectant, a good..... 408
Diving apparatus..... 24
Dogs as smugglers..... 295
Doors, by machinery 340
Doubletree, improved..... *342
Draining a cellar.....298, 379
Drawing and sketching..... 99
Drill, well-boring..... *103
Droera, the..... 72
Drop hammer, friction roll.....*374
Dryers for oil paint..... 282
Drying lumber..... 338
Dualin..... 284
Dyeing black..... 107
Dyeing felts..... 101
Dyeing ivory..... 362
Dyeing leather blue-black..... 357
Dyeing natural flowers..... 180
Dyeing, notes on 229
Dyeing sheepskins..... 58
Dyeing silk..... 379
Dyeing with logwood..... 171
Dyeing with mahogany sawdust. 390
Dyes, testing..... 339
Dynamite as a stump puller..... 341
Dyspeptics, currant leaf tea for.. 279

E

Earth, curvature of the..... 122
Earthenware, the manufacture of 3
Earth's crust, the..... 282
Ebonite..... 122
Ebony, imitation..... 299
Eclipse of the moon, total *100
Education and book knowledge. 112
Education of artisans, the..... 404
Education of children, early..... 213
Eggs, preserving..... 181, 298, 378
Elastic limit, elevation by stress. 368
Electrical condenser..... 363
Electrical figures on conductors. 289
Electrical gas regulator..... 24
Electric amalgam..... 91
Electric conductors, elongation of..... 307
Electric current, passage of..... 376
Electric discharges in air..... 65
Electric gas lighting..... 401
Electricity, animal..... 69
Electricity from albumen..... 342
Electricity, galvanic 210
Electricity *vs* yellow fever..... 51
Electricity and chemical action. 348
Electric knitting gear *242
Electric light and gas compared 372
Electric light, Wilde's..... 275
Electric toy, an *291
Electric writing..... 91
Electro-capillary engine.....*195, 245
Electromagnets, making..... 58
Electroplating..... 75, 133
Electroplating balance..... *66
Electroplating, copper scraps in. *82
Electroplating pewter 132
Electroplating with cobalt..... 357
Electro-sympathetic clocks..... 214
Electrotypes, iron..... 226
Elevator and conveyer..... *255
Emerald mines of Muzo, the..... 245
Enamel, black and white..... 107
Enamel, jewelry 27
Endosmosis, curious..... 289
Engine accident, steam..... 51
Engine, domestic steam.....*386
Engine economy, steam..... 325
Engineering, expert..... 17
Engineers, mistakes of..... 181
Engineers, the convention of civil..... 408
Engine, improved shifting..... 212
Engine, regulating an..... 321
Engines and boilers, efficiency of 52
Engines and boilers, the relative efficiency of..... 20
Engines and water wheels, steam 388
Engines, compound..... 122, 260
Engines, effective power of..... 272
Epsom salts in dyeing..... 72
Eremacausis, burial, and cremation 288
Eucalyptus or blue gum tree 165, 341
Expansion in rotary engines..... 128
Exploration of the Libyan desert 22
Explosion of volatile oils, etc... 341
Explosives, dangers of nursery.. 176
Eyes, focal differences in the.... 18

F

Famine in Bengal, the..... 288
Farmers' health..... 369
Faucet, self-closing..... *178, *358
Feathers, new use for..... 120
Fence, picket..... *326
Fence, portable..... *18
Fertilizer, a new..... 260
File, newspaper..... *354
Files, tempering..... 59
Filling for walnut wood..... 43
Fire, a street..... 216
Fire extinguishing apparatus....*207
Fire, Greek..... 267
Fireplace, Galton's ventilating.. *99
Fireproof Building Company, the 117
Fireproof construction, new..... 232
Fires, colored..... 58, 154
Fires, curious origin of..... 292
Fish culture, private..... 242
Fish grappling spear..... *147
Fish, hybrid..... 53
Fish in alkaline waters..... 388

© 1874 SCIENTIFIC AMERICAN, INC.

Fish in Nevada hot springs..... 148
Fish scale ornaments..... 344
Fish, the grass-eating.....*226
Flannels, washing..... 219, 267
Floats for ships' boats..... 293
Floral chameleon, a..... 277
Floral ornament, a new..... 37
Fly wheel, fracture of a..... 197
Fog dispeller wanted..... 85
Fogging negative baths..... 379
Food, a neglected source of..... 256
Formic fungus farmers..... 352
Fossil man, new..... 161
Franklin Institute exhibition..... 296
Franklin Institute on steam boilers..... 152
Franklin Institute semi-centennial..... 133
Freak of nature, a curious..... 372
Freezing machine..... *54
Freezing mixture..... 106, 170
Friction engine..... 325
Friction gears..... 53
Friends, to our..... 49
Frog culture..... 166
Frost striations in mud..... 182
Fruit cans, old..... 8
Fruit trees, how to treat..... 384
Fuel, composition of..... 200
Fuel economizer.....*290
Fuel in furnaces..... 390
Fuel manufacture, artificial..... 213
Funnel, hot water..... 231
Furnace bridge wall.....*70
Furnace, the Woolwich..... 359
Furniture casters.....*6
Furniture polish..... 315
Fusible metal..... 27

G

Gaining machine.....*102
Gallon, the American..... 274
Galvanometer, new..... 152
Gang saw table.....*406
Gapes, to cure..... 299
Gardening, house top.....*183
Gardening, seasonable hints on.. 200
Gardening, window..... 200
Gardens at Caserta, Italy.....*407
Gardens, modern Egyptian.....*311
Gas meter, the largest..... 373
Gasoline, dangers of..... 97
Gas pressure alarm..... 367
Gas, prices of..... 404
Gas wells of New York, the..... 370
Gears, curves for..... 219
Genius in Massachusetts..... 98
Geographical progress in 1873..... 116
Geology of the West..... 341
Geyser basin, the new..... 214
Gilding, fancy..... 154
Gilding on glass..... 90, 283, 379
Gilding on marble..... 59
Gilding on wood..... 90
Gilding on zinc..... 392
Gilding without a battery..... 331
Girders, wrought iron..... 69
Glacial epoch, the..... 299
Glacial remains in Central America..... 304
Glass, cutting..... 188
Glass, etching on..... 330
Glass opaque, to render..... 264
Gloves, cleaning..... 283
Glue..... 27
Glue as a healing remedy..... 116, 200
Glue, liquid..... 170, 250
Glue, waterproof..... 379
Glycerin, making..... 347
Glycerin, pure..... 111
Glycyrrhizin..... 181
Gold, casting..... 40
Gold coin, the wear of..... 37
Gold fish, treatment of..... 402
Gold for illuminating..... 102
Gold from quicksilver, separating..... 320
Gold, malleability of..... 197
Gold, melting point of..... 31
Gold plating with a battery..... 346
Gold wash..... 43
Governor.....*271
Governor for prime movers..... 336
Go West, if you..... 239
Gradients, steep..... 385
Grapes, preserving.....*147
Grassing a slope..... 260
Grate-clearing attachment.....*262
Grease spots, to remove..... 19
Greenbacks are canceled, how.....*99
Grinder for castings.....*143
Grindstones, bursting of..... 196
Gulf stream, the..... 376
Gum arabic, improving..... 214
Gum in fruit trees..... 341
Gum, transparent..... 175
Gun cotton..... 48, 171, 202
Gun, new 81 ton.....*338
Gunpowder, prismatic..... 76
Gunpowder, white..... 170, 298
Gun, the Gatling..... 79
Gypsum and marshmallow cement..... 69

H

Hachisch..... 181
Hammer at Woolwich, steam.....* 344
Hammer, drop.....*223
Hammer, improved.....*390
Hammers, an odd use for..... 246
Hardness of minerals, etc..... 295
Hardware, American..... 279
Harness, repair the..... 264
Harrow, the tarantula.....*358
Hartford Boiler Inspection and Insurance Company. 101, 116, 165
Hatchet, compound.....*342
Hats' paradise, old..... 367
Heart and the nervous system, the 218
Heat..... 40
Heat and its origin..... 20
Heat as a motor, solar..... 101
Heat by friction of liquids..... 319
Heating and ventilating apparatus.....*102
Heating feed water..... 106
Heating houses..... 27
Heat, mechanical equivalent of.. 145
Heat of the season..... 369
Heat on gases, action of..... 181
Heat on textile fabrics..... 359
Heel ball..... 58
Heliographic engraving..... 373
Heptagon, drawing a..... 130
Hinge, improved.....*406
Hides, the depilation of..... 19
Hippophagy in France..... 101
Hoisting engine.....*375
Holland, American securities in.. 282
Honest, machines to make people 194
Honey, adulterated..... 401
Honey, artificial..... 395
Hoosac tunnel, alignment of the 49,*219
Hoosac tunnel, the..... 104
Horse disease, a new..... 257
Horse in market..... 384
Horse power, dynamometrical.. 325
Horses from cribbing, preventing*322
Horseshoe calk.....*179
Horseshoe, improved.....*342
Horse's hoofs, contraction of the 219
Horses, shoeing..... 322
Horses, the care of..... 322
Horse, the genesis of the.....*246
Horse vs. steam power..... 404
Hot beds..... 131
Hotel on wheels, an..... 247
Hours of labor, the..... 58
Houses, new..... 69
Hydrant, improved.....*406
Hydrate of chloral..... 145
Hydrate of chloral poisoning.... 407
Hydraulic engineering in Nevada *67
Hydrocarbon gas, its permanence 376
Hydrocarbon, vulcanization of.. 81
Hydro electric machine..... 363
Hydrogen, absorption by iron.... 371
Hydrogen alloys..... 357
Hydrogen a metal..... 278
Hydrogenated palladium..... 261
Hydrogen, buoyancy of..... 250
Hydropnopia, a remedy for..... 197

I

Ice, 112 miles an hour on..... 181
Iceberg alarm..... 374
Ice cream freezer.....*246
Iceland's millenial..... 326
Ice-making, ammonia.....*243
Idleness..... 180
Illinois, new industries in..... 310
India rubber for steam pipes..... 279
Indicating steam engines.....*64
Indigo, sulphate of..... 394
Induction battery..... 171
Induction coil..... 218, 315, 378, 379
Infusorial silica..... 65
Improvements, the march of..... 296
Ink, gold and silver..... 58
Ink, green black..... 28
Ink, invisible..... 203, 234, 299
Ink, printer's..... 154
Ink, red..... 200
Ink, restoring faded..... 85, 378
Inks, bronze and gold..... 123
Inks, colored..... 27, 251
Ink, silver..... 298
Inkstand, inexhaustible.....*306
Inkstand, the dry..... 103
Ink, violet..... 58
Insect case, magnifying.....*246
Insect catching device, an..... 295
Insects, to destroy..... 115
Insulators..... 280
Inventions, introducing..... 245
Inventions patented in England by Americans, 25, 74, 104, 120, 136, 152, 168, 201, 216, 232, 248, 264, 297, 312, 328, 345, 361, 392
Inventions, rights of employers and workmen in..... 160
Inventive progress, a year's..... 65
Inventor, a fortunate..... 305
Inventor, benefactions of a..... 6
Inventors, a chance for..... 229
Inventors and patent owners, N. E. Association of..... 81
Inventors' mistakes..... 226
Inventors, to..... 101
Investors, a chance for..... 280
Iodate of calcium..... 346
Iron and fireproof construction*259
Iron, burnt..... 51
Iron, chemical classification of.. 280
Iron columns..... 210
Iron from the ore, wrought.....*35
Iron-making, new process for.... 213
Iron ores of Missouri, the..... 112
Iron, protecting..... 103
Iron pyrites, utilization of..... 134
Iron ships, protecting paint..... 343
Iron, the welding of..... 406
Iron trade, state of the..... 112
Iron trade, the..... 357
Iron trade, the depression in the 304
Ivory, imitation..... 394
Ivory, artificial..... 234

J

Japanese scintillettes..... 123
Japan, geological survey..... 368
Japanning bedsteads..... 408
Jerusalem, the ancient..... 116
Jointer, universal.....*383
Journal boxes, adjusting.....*69
Journal box metal..... 90
Jupiter's satellites.....*354

K

Kainit..... 155
Kangaroo and alligator skins..... 72
Kiln, Hawley's..... 18
Kindness and brutality..... 307
Knock knees..... 250

L

Labor, aversion to..... 325
Labor legislation in California... 274
Labor, the hours of..... 37
Lacquer, green and gold..... 363
Lacquer, Japan..... 230
Lacquer, pale..... 266
Lake Tahoe, depth of..... 88
Lake Titicaca..... 160
Lameness, intermitting..... 262
Lamp, new petroleum..... 182
Lamps, lighting street..... 228
Lantern, signal railroad.....*198
Lap and lead..... 11
Lard and butter cutter.....*306
Lard oil..... 283
Larynx, a metallic..... 343
Laugh and be healthy..... 34
Laughing gas..... 171
Lava flood of Oregon, great..... 176
Lava over flow of Oregon, the..... 55
Law suit, curious..... 34
Lead poison, a preventive of..... 408
Leather, preventing sweating of 178
Leather, Russia..... 378
Leather, testing..... 357
Left-hand writing..... 353
Legal decision, interesting..... 392
Lemon sugar..... 378
Lemons wholesome..... 298
Leveling instrument..... 376
Lever, power of a compound.....*11
Leyden jar..... 347
Life raft, instantaneous.....*275
Lighthouses, modern American*203
Light in air and in vacuo..... 308
Light in stones..... 279
Lightning rod.....*347
Lightning rod, improved.....*262
Lightning rods..... 132, 170, 218
Linoleine..... 230
Linseed oil..... 322
Lipomata, the diagnosis of..... 55
Live oak, the..... 395
Locomotive, a Fairlie.....* 229
Locomotive engineers, brotherhood of..... 208
Locomotive, road and farm.....*385
Locomotives, American and European..... 290
Locomotive sand box.....* 133
Locomotive, street..... 280
Locomotive, the fireless..... 96, 261
Lounge and bath tub.....*118
Lubricator for outdoor use..... 379
Lune, measuring a..... 298
Lupus, cure of..... 85

M

Machinery and civilization..... 258
Machine tools.....*373
Machine tools, charges for..... 404
Machinists' supplies..... 69
Magnetic equivalent of heat, the 321
Magnetism and the nodular form of iron..... 36
Magneto electrical instrument, a new.....*211
Magnets, new results with..... 175
Mallet, improved..... 54
Man, growth of..... 122
Marble, cleaning..... 58
Marble, polishing..... 283
Marine propulsion, new mode of 53
Marking brush, fountain.....*358
Marking fluid, a..... 406
Mars, the planet..... 355
Matches, take care of the..... 177
Measuring logs..... 75
Measuring the width of a stream*291
Meat diet..... 161
Mechanical equivalent of heat.. 325
Mechanics, the marvels of..... 208
Mechanism, practical.....*373, *389
Medical notes..... 407
Medical study in France..... 264
Members, their increased uses.. 368
Mennonites, the..... 376
Mercury, pressure of..... 378
Mercury, purification of.....*131
Mesmerism..... 378
Metaline.....*19
Metallic decorations, new..... 180
Metallic spectra, on some..... 70
Metals, expansion, etc., of..... 379
Metals, Professor Thurston on.. 229
Metals, testing the quality of *38, 39
Metals, their character exhibited by fracture..... 209
Metals under strain, behavior of 225
Metamerism in organic chemistry 308
Meteor in Nevada..... 82
Meteors, recent..... 52
Metrological science..... 2 8
Metronome..... 123
Mica, a substitute for..... 132
Microscope, oxyhydrogen..... 234
Microscopical exhibition..... 100
Microscopic aquarium.....*391
Milk as a diet..... 337
Milk from Switzerland..... 401
Milk in Switzerland, condensed. 343
Millers, a mass convention of.... 319
Mind over the body, power of.. 244
Mine in the world, the greatest.. 212
Mineral statistics of Great Britain 279
Mirror, a globe..... 364
Mirrors repairing..... 208
Mississippi river, the..... 404
Mississippi, the overflow of the.. 340
Mitering machine.....*218
Miter machine and vise.....*342
Moles..... 53
Moles, to destroy..... 404
Montezuma, the palace of..... 193
Morphia, new alkaloid from..... 82
Motion without nerve force..... 244
Motor, a Mexican..... 88
Motor, another new..... 273
Mountains of the United States. 180
Muscarin..... 242
Muscular movement without life 320
Museum of Natural History, the 385
Mustard, poultice, improved..... 408

N

National Academy of Science, the 293, 308
Natro-metallurgy..... 131
Naval efficiency, our..... 193
Naval engineers, pay of..... 357
Navy, machinists of the..... 85
Navy, the report of the chief engineer of the..... 2
Needle threader.....*178
New books and publications, 9, 25, 41, 74, 88, 104, 120, 152, 168, 184, 201, 232, 248, 264, 297, 312, 345, 361, 377, 392, 409
Nerve derangements..... 228
Nerve force..... 177
Nerve force, Dr. Brown-Séquard on..... 2 3
Nerve, separation of a..... 248
Nerve, the optic..... 212
Nervous impulses, velocity of.. 96
Nervous system, central..... 244
Nickeling..... 151
Nickel in Missouri..... 37
Nickel plating..... 171
Nitrate of ammonia..... 267
Nitrite of ammonia..... 117
Nitrogen from the atmosphere... 27
Nitro-glycerin..... 288
Notes from Washington, D. C. 340, 388
North polar expedition, Swedish 357
Norwegian antiquities..... 213
Nut lock.....*89

O

Oatmeal as infants' food..... 389
OBITUARY:
Agassiz, Louis J. R.....*7
Arnot, Neil..... 209
Bakewell, Thomas W..... 310
Bogardus, James..... 276
Coffin, James H.....*82
Glass, Sir Richard A..... 68
Harrison, Joseph..... 248
Jacobi, Moritz H. von..... 296
Legros, ——..... 145
Nelson, Samuel.....*7
Papillon, Fernand..... 145
Rive, A. de la..... 49
Ruggles, Draper..... 33
Schultze, Max..... 145
Sharps, Christian..... 200
Smith, Sir Francis P.....*151
Thurston, Robert L..... 145
Wilkinson, Jephtha A..... 33
Williams, Lloyd A..... 33
Offal, utilization of..... 294
Ohm, the..... 117
Oil deposits of the west..... 160
Oiler, portable.....*274
Oil notes..... 130
Oils, essential..... 215
Oil spots..... 145
Oleomargarin..... 305
Orchid house, a modern.....*55
Ordnance, European..... 403
Organ, inside a church..... 21
Organ pipes..... 123
Oroide..... 347
Ortou's travels, Professor..... 86
Ourselves, about..... 101, 132, 165
Oxides of nitrogen, the..... 98
Oxygen absorbed by plants..... 336
Oxygen gas, making..... 267
Oxygen, the respiration of..... 337
Oyster culture in America..... 391
Oyster patent, an..... 343
Ozone, new method of supply.... 112
Ozonized water..... 65

P

Packing and weighing machine..*310
Pail, butter and oyster.....*163
Paint, a reddish brown..... 216
Paint from cloth, removing..... 75
Painting bedsteads..... 408
Painting magic lantern slides.... 390
Painting on glass..... 123
Painting tin roofs..... 202
Paints, varnish..... 347
Palace cars in England, the Pullman..... 271
Palæotherium magnum, the.....*210
Palestine..... 116
Paper and glass debate, a..... 129
Papering, house..... 226
Paper pulp, molding..... 170
Paper, transparent, to make..... 247
Paraffin..... 268
Paraffin oil industry, the..... 95
Paraffin, transparent..... 309
Parallel motion, a new.....*371
Parrot, a hunter's..... 347
Paste for gems..... 106
Paste that will not sour..... 219
Pasteur, M., and the French Assembly..... 369
Pastilles, fumigating..... 154
Pasting paper to tin..... 235
Patent affairs at Washington..... 309
Patent cases, delay in..... 6
Patent convention, proceedings of the..... 65
Patent conventions, new..... 16
Patent decisions of the courts. 9, 25, 41, 56, 72, 88, 104, 120, 136, 152, 168, 184, 200, 216, 232, 248, 297, 328, 360, 376, 392
Patent discussion, a congressional 176
Patent extension schemes, failure of..... 401
Patent law for castings..... 144
Patent litigation decision..... 240
Patent litigation, the Page..... 134
Patent monopolies in Congress.. 128
Patent Office decisions. 9, 88, 168, 184, 328, 360
Patent Office in 1873, operations of 113
Patent Office, reform in the..... 52
Patent Office printing, the..... 32
Patent sellers, swindling..... 160, 212
Patents, official list of..12, 28, 44, 60, 76, 91, 107, 123, 139, 155, 171, 187, 203, 219, 235, 251, 267, 283, 299, 315, 331, 348, 363, 380, 395, 410
Patents, official list of Canadian, 12, 28, 44, 76, 92, 108, 124, 140, 155, 204, 220, 238, 252, 268, 284, 300, 316, 332, 348, 364, 380, 396
Patents, one week's issue of..... 5
Patents, recent American and foreign, 10, 25, 41, 56, 73, 88, 104, 120, 137, 152, 168, 184, 201, 217, 232, 248, 264, 280, 297, 312, 329, 345, 361, 377, 392, 409
Patent, the metal shoe tip..... 309
Pavements, London..... 352
Pavements, slippery..... 128
Pearlash for extinguishing fires.. 66
Pearls, imitation..... 250
Peat coal..... 194
Peat, drying..... 324
Pen, an excellent..... 37
Pen, capillary font.....*178
Pendulum, horizontal.....*179
Percussion priming..... 284
Perfume from flowers, extracting 170
Permanent way, iron.....*180
Petroleum fires and chloroform.. 373
Petroleum in steam boilers..... 164
Phosphate of calcium..... 123
Phosphide of calcium..... 52, 59
Phosphor bronze..... 315
Phosphoric acid on oats..... 339
Phosphorus a cure for cataract.. 376
Phosphorus, black..... 145, 376
Photographic engraving..... 231
Photographic process, new..... 49
Photographs, exhibiting..... 197
Photographs, transparent..... 376
Photography at bottom of the sea 353
Photography, Dr. Vogel's discovery..... 84
Photography, dry plate..... 215
Photo-lithography, improvement..... 150
Photo-negatives, reproducing... 399
Photo-negatives, treating..... 310
Photo paper, sensitive..... 295
Pillars of brick and stone..... 226
Pine, the strength of..... 293
Pipe cutting and threading machine.....*131
Pipes for buildings, flood.....*227
Pipe way transportation..... 213
Pipe smoking on teeth, effect of.*339
Pisciculture in Canada..... 102
Pisciculture in its sanitary and commercial aspects..... 36
Plane guide.....*216
Planer, diagonal.....*198
Planer, the diagonal..... 216
Planer, the Hamilton surface.....*308
Planetary distances, law of the.. 181
Planetary satellites..... 308
Planetary system, harmony of the 212
Plantain as paper stock..... 197
Plants, carnivorous..... 207
Plants, curious.....*327
Plants, curious ways of..... 149
Plants, respiration of..... 401
Plant, the laughing..... 200
Plating steel springs..... 330
Platinum ductility of..... 257
Platinum, fusion of..... 7
Platinum plating..... 266
Pleasant words..... 161
Plow, improved.....*6
Poisons and their antidotes..... 228
Polar clock, the.....*338
Polariscope, objects for the..... 212
Polaris expedition, results of the 177, 308
Polish for walnut wood..... 315
Polishing agate..... 188
Polishing a parabolic mirror.....*276
Polishing selenite..... 330
Polish, starch..... 27
Porcelain, the home of..... 86
Porcelain, Worcester Japanese.. *5
Pork in Indianapolis..... 230
Postage to France..... 371
Postal cards..... 273
Post, the Phœnix..... 18
Post, the ribbon.....*117
Potassium, salts of..... 58
Potato bug, Colorado.....*306
Potato bug, remedy for..... 383
Potato digger, improved.....*230
Potato flour..... 106
Pottery, lead coating on..... 19
Poultry manure..... 7
Power by wire ropes..... 376
Practical mechanism.....*373, *389
Presence of mind..... 130
Pressure forging..... 278
Pressure not a motive power..... 336
Pressure of water in pipes..... 251
Pressure regulator, fluid.....*127, 134
Prevention in place of cure..... 276
Prime movers and their recent progress, the.....16, 33
Printing press, the Augsburg..... *1
Prismoidal railway, the..... 20
Prize for a coal-cutting machine. 166
Prize for an alcoholometer..... 216
Prize for an essay on steel..... 294
Prizes for national industries, French..... 136
Problem, a curious.....*400
Proctor on the habitable planets, Professor..... 8
Proctor, Professor R. A.....*115
Proctor's return, Professor..... 358
Procyon, the companion of..... 41
Propagating house, the..... 211
Propeller, fast..... 104
Propeller, marine.....*103
Propellers, small swift..... 1
Propeller, the bow and stern screw 311
Propeller, the screw..... 245
Propulsion of floating bodies.... 161
Pruning shears.....*89
Psychic force..... 65
Pump, improved steam.....*243
Pumping engine economy.....*257
Pumping engines, remarkable.. 176
Pump, the Dayton cam.....*303
Pump, the Niagara.....*310
Punch and screwdriver.....*3 0
Pyrites, a hill full of..... 246
Pyrites, the utilization of iron.. 48
Pyrometer, acoustic..... 129
Pyrophone, the.....*279

Q

Quantivalence, the new theory.. 368
Quicksilver, extraction of..... 65

R

Rabbits' hair, felting..... 19
Railroad, a Russian Chinese..... 255
Railroad curves..... 228
Railroad in a new country, a..... 261
Railroading, amateur..... 255
Railroading at a high elevation.. 149
Railroad signal office, a..... 166
Railroads in Europe and America 264
Railroad, 60 miles an hour by..... 175
Railway freight..... 210
Railway, locusts on a..... 401
Railway receipts and expenses.. 37
Railways, English and American. 218
Railways in Great Britain..... 81
Railways, underground, in London..... 272
Railways without switches, etc.. 399
Railway, the Mount Vesuvius.. 401
Railway up Mount Vesuvius, a... 276
Railway, 3,500 miles by..... 409
Rainbow, the..... 333
Rain cannonades..... 280
Rain in California..... 129
Ramie industry, the..... 101
Ramming the mold..... 39, 196
Rattlesnakes and tarantulas..... 357
Rawhide journal boxes..... 405
Refraction, atmospheric..... 52
Refrigerator, zero.....*227
Reservoir and dam, the burst.... 344
Reservoir, bursting of a..... 344
Rifle hook.....*85
Rhigolene..... 81
Rhinoceros, death of the great,.. 37
Rhodium, oil of..... 58
Riveting machine, hydraulic.....*339
Rolling mill, a six acre..... 307
Roofing composition..... 326
Rope, the longest in the world.. 367
Rosewood, imitation..... 154
Rubber as a defensive armor.....*353
Rubber, dissolving..... 27, 363
Ruled plates, Rutherford's..... 261

S

Saccharometer, a new..... 197
Safe, drill-proof.....*70
Saffranin..... 72
Sail, the shadow.....*306
Salt in sickness..... 66
Samoan islands, the..... 370
Sand blast for cleaning walls..... 115
Sand blast, the philosophy of the 81
Sand blast, Tilghman's..... 24
Santonine, researches in..... 19
Sap in the bark of trees..... 309
Sash balance, the Shaker.....*262
Sawdust, burning..... 59
Saw gummer, improved.....*150
Saws, Asiatic..... 402
Saw set, circular and band.....*182
Saws, movable teeth for.....*130
Saw, the Emerson stone..... 53
Scaffold, adjustable..... *211
Scale, Gunther's..... 330
Scale, the diagonal..... 208
School room, death in the..... *49
Science, a national museum of... 340
Science as a trainer..... 70
Science Record for 1873..... 32
Sciences, the study of the..... 117
SCIENTIFIC AMERICAN, Dr. Hall and the..... 152
SCIENTIFIC AMERICAN, special number of the..... 17
SCIENTIFIC AMERICAN, value of the..... 17, 114, 165
Scientific and practical information..19, 41, 49, 65, 81, 101, 117, 129, 145, 161, 197, 225, 241, 261, 277, 289, 308, 357, 376, 401
Scientific Englishman on scientific Americans, a..... 8
Scientific shoals..... 65
Scientific notes, French Academy 195
Scientific principles, value of.... 369
Scientific progress in Europe, recent..... 197
Scissors, combination.....*274
Scissors, tooth-edged.....*210
Screw, improved wood.....*99
Screw plate, the lightning.....*226
Screw propulsion, the origin of.. 241
Seaforthia elegans, the.....*343
Sea lions, how they enjoy life.... 277
Sebacic acid..... 341
Selenium, action of light on..... 241
Sensitized paper..... 314
Sewers of Paris, the..... 261
Sewing machine engine..... 165
Sewing machine monopolists, the 304
Shark, a basking..... 215
Shell heaps in Maine..... 248
Shipbuilding, a novelty in..... 343
Ship Faraday, launch of the..... 213
Ships, collisions of..... 53
Ships, compartment..... 272
Ships, insubmersible..... 376
Ship, the polysphenic..... 359
Ship, war, the Inflexible..... 279
Shirts, etc, polishing..... 250
Siamese twins, autopsy on the.....*144
Siamese twins, physiology of the 100
Siamese twins, the..... 80, *115
Signal, new luminous..... 357
Signal, rail way..... 296
Silkworm, the yama-mai.....*66
Silver, aluminum..... 409
Silver, imitation of..... 51, 152
Silvering glass..... 234
Silvering tin ware..... 266
Silver mines of Peru, the..... 69
Silver plate, polishing..... 250, 346
Silver plating without a battery 170, 187
Sinai, Mount..... 161
Sinai, the peninsula of..... 116
Sink, improved.....*143
Siren, steam.....*279
Sirup, testing..... 122, 171, 267
Situation, to keep a..... 115
Skamptjelding..... 54
Skin grafting.....*312
Skunk's bite, is it deadly?..... 344
Sky and clouds..... 261
Slag, analysis of..... 331
Slates, fixing..... 103
Sled body, to build a..... 389
Slotting and planing tool.....*175
Slugs and snails..... 196
Snow on the Sierra Nevada..... 223
Soap, curd..... 128
Social Science Association, American..... 360
Social Science Congress, American..... 387
Soda, American..... 176
Soda, washing..... 59
Sodium flame, a monochromatic. 197
Solar attraction and centrifugal force.....*355
Solar counter, the..... 247
Solar system, the..... 88
Solder, bismuth..... 58
Solder for Britannia metal..... 27
Soldering files, etc..... 90
Soldering iron..... 123
Solder, pewterer's..... 330
Solids, the flow of..... 328
Sound from flames, etc..... 293
Sounding apparatus.....*194
Soundings, Pacific Ocean..... 212
Sound, motion and sensation of .*162
Sound, Professor Tyndall's experiments..... 177
Sound, refraction of..... 372
Sound, the sensation of..... 293
Spectroscope, the analyzing power of the..... 276
Spectroscopic analysis..... 64
Spider's web, the..... 149
Sponge, washing..... 376
Spoon, mixing.....*322
Sporting tackle..... 130
Sphygmograph in Bright's disease 390
Spike bar, improved.....*194
Springs of Costa Rica, warm.... 210
Square, to make a T.....*165
Stains of fruit, removing..... 171
Stalactites from masonry..... 391
Starch, corn..... 154
Starch, sources of edible..... 401
Star depths, the..... 87
Stars, double..... 298
Steam auxiliary, new..... 167
Steamboat law, new..... 356
Steamboat, the first..... 362
Steam engine, domestic.....*386
Steam engine economy..... 325
Steam engines and water wheels 388
Steam engines, the effective power of..... 272
Steamer, a model..... 353
Steamers, light draft iron..... 119
Steamer, the fastest..... 343
Steam, expansion of..... 387
Steam generator, safety.....*239
Steam, higher pressures of..... 325
Steam life boats..... 289
Steam navigation..... 215
Steam omnibus and streetcar.....*35
Steam pipes, isolating..... 369
Steam power, useful information on..... 325
Steam pressure on steamers..... 388
Steam, utilizing waste..... 183
Stearin candles..... 145
Steel bars in place of bells..... 250
Steel, case hardening..... 122
Steel, Damascus..... 298
Steel for boilers..... 166
Steel, hardening..... 51
Steel, phosphorus..... 261
Steel rails..... 101, 104
Steel, softening..... 347
Steel, tempering..... 122
Steel, Whitworth..... 129
Stellar motion..... 49
Stereotyping..... 363
Stokers, mechanical..... 274
Stone, béton Coignet artificial...*231
Storm glass..... 75
Storms, the law of..... 308
Stove for smoke houses.....*214
Stove pipe, condensation in..... 122
Stoves, look to your..... 2
Strain diagrams and their revelations.....*307
Strain diagrams and what they tell us.....*277
Stuffing animal specimens..... 250
Subscribers, to new. 129, 145, 184, 197, 209
Subscribers, to our..... 17
Sugar, ammonia for purifying... 242
Sugar, chemical..... 7
Sugar, clarifying..... 378
Sugar from caoutchouc..... 181
Sugar making, improvement in.. 161, 257
Sulphate of copper..... 394
Sulphide of cadmium..... 101
Sulphur, a hill of..... 209
Sumac..... 71
Sunday science..... 114
Sun, latest news from the..... 85
Sun, no water in the..... 357
Sun ray, Herschel, Tyndall, and Draper on the..... 128
Sun's atmosphere, absorption by the..... 242
Sun's distance, determining the. 167
Sun, the..... 298
Sun, the heat of the..... 289
Suppressed member again, the.... 240
Surgical devices, new..... 101
Surveys, mountain and lake, N.Y. 296
Swimming baths in Australia..... 80

T

Tallow and lard, purifying..... 41
Tannin, determining..... 261
Tannin, estimating..... 315
Tanning, improvement in..... 149
Tan skins, to..... 147
Tar and ammonia from waste.....*258
Tartaric acid, property of..... 277
Tattoo marks, removing..... 331
Teamsters, a handy device for.... 19
Tea, solidified.....*370
Teeth, root filling..... 200
Teeth, the decay of..... 55
Telegraph cable, failure of the new..... 160
Telegraph cable, the new.....*371
Telegraph, computing..... 175
Telegraphic progress in 1873..... 144
Telegraph in China..... 117
Telegraph lines..... 280
Telegraph lines, underground.... 294
Telegraph, new district instrument..... 344
Telegraph poles, etc., preserving 343
Telegraphs, the English.....*114, 280
Telegraphs, the Post Office and the..... 192
Telegraphs, unprofitableness of government..... 344
Telegraph system, automatic..... 8
Telegraph, test of the automatic 129
Telegraph, time for railways..... 358
Telegraph wires, overhouse..... 280
Telescope at Washington, the great..... 308
Telescope of unlimited power, a 20
Telescope, new and gigantic.....*159
Telescope, cheap,..... 7, 186
Telescope, the mercurial..... 309
Telescope, the million dollar.... 148
Telescope, the proposed great.... 53
Telephon, the..... 115
Telluric ores of Colorado..... 306
Temperance crusade motto..... 306
Temperance problems..... 261
Temperature on iron, effect of.... 48
Temperatures, artificial low..... 227
Temperature, to attain high..... 400
Tempering iron..... 305
Tempering taps..... 235
Terra del Fuego, lake in..... 342
Testing laboratory, a..... 320
Textile plant, a new..... 41
Thallium..... 231
Thallium, combustion of..... 344
Thermometers, how they are made..... 322
Thrashing machines, English..... *83
Threshold, adjustable.....*210
Ticks in sheep, killing..... 330
Tides of Tahiti, the..... 308
Timber preservative..... 195
Timber, the preservation of..... 148
Time, ascertaining the apparent 11
Time, uniform mean..... 111
Tinfoil ornamentation..... 180
Tinning cast iron..... 76
Tinning iron wire..... 122
Tin ware, American..... 387
Tool-grinding machine.....*182
Tool holder.....*18
Tool holder, a new.....*166
Tools, boring.....*405
Tools, holding.....*389
Tools, machine.....*373
Tools, round nosed.....*389
Tools, side.....*405
Tools, side rake.....*389
Tools, spring.....*405
Tools, square nosed.....*389
Tools, strains on.....*373
Torpedo, the fish..... 153
Torpedo, the Toselli.....*86
Torsional strain..... 28
Towers and spires..... 84
Tower, Trevethick's 1,000 feet.. 133
Tramway and vehicle.....*24
Transfer of negative films..... 260
Transfer paper, black..... 154
Transferring engravings to wood 138
Transferring to glass..... 123
Trees and plants, Australian..... 339
Trees, plant..... 328
Tree that keeps a standing army, a 272
Trench braces, improved.....*131
Trollite..... 277
Trotting gear.....*18
Trout in an artesian well..... 163
Tube and disk problem, the..... 379
Tubercle, propagation of..... 34
Tubing for mines, flexible, etc...*292
Tunnel at Richmond, railroad..... 18
Tunnel, Bergen Hill..... 120
Tunnel borer, battering ram.....*111
Tunnels..... 212
Tunnel, the British channel..... 50
Tunnel, the Detroit river..... 208
Tunnel, the Dover and Calais..... 80
Tunnel, the St. Gothard..51, 262, 390
Turbine limitations..... 228
Turbines, effective power of..... 289
Turbine water wheels..... 356
Turbine wheel, improved.....*214
Turbine wheel, Whitmore.....*294
Turning crank pins, etc., machine for.....*402
Turpentine..... 324
Turtles with teeth.....*114

V

Vaccination of dogs..... 241
Vaccine virus..... 282
Vacuum, procuring a..... 379
Valerian in diabetes..... 407
Valves, pump..... 218
Varnish for iron work, black..... 266
Varnish, gutta percha..... 379
Varnish, red shellac..... 11
Vegetables by drying, preserving 66
Vegetable fecundation of..... 66
Velocipedes, practical use of..... 287
Ventilation..... 59
Ventilation of the Senate chamber..... 68
Ventilation question, the..... 228
Ventilation, theories on..... 211
Ventilation, the principles of.... 132
Venus, the transit of..... 298
Vermin in birds..... 88
Vermin killer..... 65
Vibrations of liquid surfaces..... 405
Victoria Regia house, Chatsworth, England.....*151
Vienna exhibition and its results, the..... 32
Vinegar, malt..... 58
Vitality, is it vital?..... 80
Volume XXX, the end of..... 400

W

Wales, Mr. Salem H..... 369
Wash boiler, improved.....*103
Wash for walls red..... 394
Watches by machinery, making 149
Water and copper pipes..... 200
Water as fuel..... 384
Water, maximum density of..... 241
Water, measuring flowing..... 372
Water meter, a new.....*167
Waterproof calico..... 55
Waterproofing cloth..... 58, 90
Waterproof paper..... 316
Water, refraction of compressed 375
Water, solvent powers of..... 69
Water works at Rochester, N.Y.. 161
Wax flowers, making..... 50
Wells, artesian..... 241
Wells, Hon. D. A., and the French Institute..... 320
Whale in New Jersey, a..... 385
Wheat steamer and dryer.....*370
Wheelerite, a fossil resin..... 392
Wheel, improved.....*294
Whip and rein holder.....*246
Wind, noting the direction of the 242
Wind, pressure of the..... 378
Winds on vegetation, influence of 98
Wind wheel and water elevator. *402
Wine crop in the United States.. 332
Wines and their colors..... 375
Wine, tests for red..... 101
Wire and its manufacture..... 386
Wire, insulating..... 123
Wire, manufacture of..... 386
Wires, jointing telegraph..... 260
Wires of remarkable length..... 386
Wire, varied uses of..... 386
Wire way for transporting ores, etc.....*374
Wire worms..... 406
Women dentists in Egypt..... 39
Wonder camera, the.....*354
Wood ashes for worms..... 277
Wood, decorating..... 49
Wooden labels, preservation of 218
Wooden taps, preserving..... 319
Wood filling..... 155
Wood like mahogany, polishing.. 4
Wood, petrifaction of..... 282
Woolwich Arsenal, the Czar at.. 388
Work holder, lathe.....*326
Wounds, the open treatment of.. 357
Wrecks, raising..... 225

Y & Z

Yankee notions..... 54
Yeast..... 284
Yeast, compressed..... 266
Young, James..... *95
Zinc, casting..... 379
Zinc, oxidation of..... 394
Zinc, pulverizing..... 58
Zodiacal light, cause of the..... 320
Zodiacal light the.....*371

© 1874 SCIENTIFIC AMERICAN, INC.

BAIRD'S BOOKS

FOR PRACTICAL MEN.

My new, revised and enlarged Catalogue of PRACTICAL AND SCIENTIFIC BOOKS—96 pages, 8vo.—will be sent, free of postage, to any one who will favor me with his address.

HENRY CAREY BAIRD,
INDUSTRIAL PUBLISHER,
406 WALNUT STREET, Philadelphia.

WATER AND MINERAL ELEVATOR—Or "WIRE WAYS," illustrated in this number to *answer thousands of letters received* Cheaper and more reliable than pumps. Invaluable in transporting ores over chasms. Rights $500 a State—$50 a County. "CARRIAGE" costs only $5—Wire and Rope, according to length, at dealers' rates. Address
J. WHITSON ROGERS, Peekskill, N.Y.



Cooper's Engine & Mill Works,

MANUFACTURERS OF

First-Class Stationary Engines,

First — With single slide valve cut-off by lap at ⅞ stroke.
Second—With indexed cut-off valves arranged to close at any part of stroke.
Third — Steam jacketed cylinders, fitted with patent automatic cut-off valve gear and governor, guaranteed to run on 3 lbs. of coal per indicated horse power, or to make 80 barrels from 1 ton coal.

PORTABLE ENGINES, of 8, 10, 20, and 25 Horse Power.
IMPROVED HANGERS, COUPLINGS, FOUNTAIN BOXES AND SHAFTING.
FRENCH BURR SPRING GRIST MILLS AND BOLTING APPARATUS.
CIRCULAR SAW MILLS AND FIXTURES, BOILERS, MILL MACHINERY, CASTINGS, ETC.
☞ State what is wanted and Circulars free.
Address in full,
THE JOHN COOPER ENGINE M'F'G CO.,
Mount Vernon, O.

STONE SAWING MACHINERY

Merriman's Patent. Also, Hand and Steam

DERRICKS & TRAVELLERS,

THOMAS ROSS, Rutland, Vt.

Established 1858.

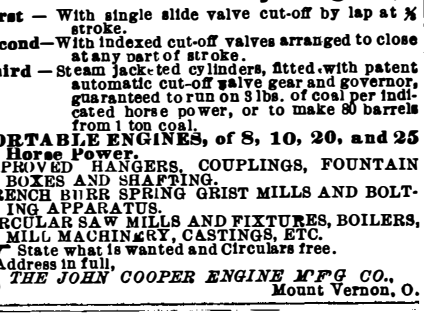

TRADE MARK PATENTED.

The best and cheapest Paint in the world for Iron, Tin or Wood. For sale by the Trade everywhere. PRINCE'S METALLIC PAINT CO., Manufacturers, 96 Cedar St., New York.

CAUTION.—Purchasers and consumers are cautioned against imitations of our METALLIC PAINT. All genuine *PRINCE'S METALLIC PAINT* will bear our name and trade mark on each and every package. Send for a circular.

THE

SECOND ANNUAL EXHIBITION

OF THE

INTER-STATE Industrial Exposition

Of Chicago,

WILL OPEN

Sept. 9th, and Close Oct. 10th, 1874.

Special Features for this year are *Machinery in operation*, and *Processes of Manufacture.* The largest and best Exhibition Building on the Continent. The most liberal arrangements for Exhibitors in every class, and the best and cheapest method of advertising for all Artisans, Manufacturers, and Inventors. Space, Steam Power, and Shafting free. Applications should be made, as early as possible, to

JOHN P. REYNOLDS, Secretary.

CHICAGO, May 25th, 1874.

$2400 Yearly to Agents. 54 new articles and the best Family Paper in America, with two $5 Chromos. Family Journal, 300 Br'way, N. Y.



The American Turbine Water Wheel,

Recently improved and submitted to thorough scientific tests by James Emerson, showing the following useful effect of the power of the water utilized, being the highest results ever known.

Percentage of Part Gate: ¼, 50.08; ½, 69.64; ¾, 78.78; ⅞, 82.53; ¼, 82.90.
Per cent. of Whole Gate: 83.14.

A full report may be obtained of STOUT, MILLS & TEMPLE, Dayton, Ohio.

FOR LEGAL ADVICE CONCERNING Infringements and Patents, consult R. B. McMASTER, Counsellor at Law, 9 & 11 Nassau st., Room 36, New York. Counsellor and Advocate in Patent Cases.

1832. SCHENCK'S PATENT. 1871

WOODWORTH PLANERS

And Re-Sawing Machines, Wood and Iron Working Machinery, Engines, Boilers, etc. JOHN B. SCHENCK'S SONS, Matteawan, N. Y. and 118 Liberty St., New York.

L. & J. W. FEUCHTWANGER,

DRUGS, CHEMICALS, OILS, &c.

180 FULTON ST., NEW YORK.
Two Door above Church Street.
(Removed from 55 Cedar St.) P. O. Box 3616.

Glass and Steel Manufacturers', Nickel Platers', Potters', Enamelers' and Soap Makers' Materials, Manufacturers of Silicate of Soda, Soluble or Water Glass, Hydrofluoric Acid, Chemicals, Metallic Oxides, Nickel Salts and Anodes. Publishers of Treatise on Gems, on Soluble or Water Glass, and on Fermented Liquors and Nickel.

MAGNETS—Permanent Steel Magnets of any form or size, made to order by F. C. BEACH & CO., 263 Broadway, New York. Makers of the celebrated Tom Thumb and Miniature Telegraph Instruments.

E. M. MAYO'S PAT. BOLT CUTTER.
☞ Send for Illustrated Circular, Cincinnati, Ohio.

WHETHER YOU WISH TO BUY OR SELL
STEAM ENGINES,
MACHINERY or
PATENTS,
Write to E. E. ROBERTS, 119 Liberty St., N.Y.

RISDON'S IMPROVED TURBINE.



Has the tightest gate and most durable. Has yielded the highest percentage of any wheel tested at Holyoke or elsewhere. 1873, Dec. 10—36 in. wheel full gate 90 per cent, seven eighths ·89, three quarters ·82. 1874, Apr. 28—43 in. wheel full gate 91 per cent, seven eighths ·89, three quarters ·83, five eighths ·76.

Additional information sent upon application to T. H. RISDON, TYLER & CO., Mount Holly, N. J.

$72 EACH WEEK. Agents wanted; particulars free. J. WORTH & Co., St. Louis, Mo.

PERKINS'S MILL. H. WESLEY PERKINS,
DESIGNER AND ENGRAVER ON WOOD,
34 Park Row, New York.
ILLUSTRATIONS OF EVERYTHING.
SATISFACTION GUARANTEED.

OVER 7,000 IN USE,

BLAKE'S STEAM PUMP

Send for illustrated catalogue, 79 & 81 Liberty st., N.Y.

SEE PATENT No. 151,137, this week's list. An ornament, containing chemicals, *successfully* preventing lamps from exploding and chimneys from breaking. Samples for 25 cents. Territory for sale or exchange. 1,000 Agents wanted immediately. Address S. S. KIRK, 512 9th St., Washington, D.C.

PATENT COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price lists mailed on application to
JONES & LAUGHLINS,
Try street, 2d and 3d avenues, Pittsburgh, Pa.
190 S. Canal st., Chicago.
☞ Stocks of this Shafting in store and for sale by FULLER, DANA & FITZ, Boston, Mass.
GEO. PLACE & CO., 121 Chambers street, N. Y.
PIERCE & WHALING, Milwaukee, Wis.

OTIS' SAFETY HOISTING Machinery.

OTIS, BROS. & CO.,
NO. 348 BROADWAY NEW YORK.

GLASS MOULDS for Fruit Jars, Lamps, Bottles, Ink Stands, etc., made by H. BROOKE, 15 years COR. WHITE AND CENTER STS., N. Y. For any thing new in glass you will require a mould (o die).
☞ PARTICULAR ATTENTION paid to MOULDS for INVENTORS. Send model or drawing; inclose stamp.

SHINGLE AND BARREL MACHINERY.—Improved Law's Patent Shingle and Heading Machine, simplest and best in use. Also, Shingle Heading and Stave Jointers, Stave Equalizers, Heading Planers, Turners, &c. Address TREVOR & Co. Lockport, N. Y.

PORTABLE STEAM ENGINES, COMBINING the maximum of efficiency, durability and economy, with the minimum of weight and price. They are widely and favorably known, more than **1,000** being in use. All warranted satisfactory or no sale. Descriptive circulars sent on application. Address
THE J. C. HOADLEY CO. Lawrence, Mass.

IRON BRIDGES—CLARKE, REEVES & CO., PHŒNIXVILLE BRIDGE WORKS. Office, 410 Walnut Street, Philadelphia, Pa.
Specialties—Accurate Workmanship—Phœnix columns—Use of double refined iron. No welds. All work done on the premises, from ore to finished bridges. Illustrated Album mailed on receipt of 75 cents.

Machinery,

Wood and Iron Working of every kind. Leather and Rubber Belting, Emery Wheels, Babbitt Metal, &c.

Sturtevant Blowers.

Of every size and description constantly on hand.

Cold Rolled Shafting.

Best and most perfect Shafting ever made, constantly on hand in large quantities, furnished in any lengths up to 24 ft. Also, Pat. Coupling and Self-oiling adjustable Hangers, pulleys, etc. GEORGE PLACE & CO., 121 Chambers Street, & 103 Reade Street, New York.

Niagara Steam Pump.

CHAS. B. HARDICK,
23 Adams st., Brooklyn, N. Y.

THE JOHN HARDICK

Niagara Steam Pump.

HUBBARD & ALLER, Brooklyn, N.Y.

PUNCHING AND DROP PRESSES. For the Best and Cheapest. Address THE STILES & PARKER PRESS CO. MIDDLETOWN, CONN.

WOOD-WORKING MACHINERY GENERALLY. Specialties, Woodworth Planers and Richardson's Patent Improved Tenon Machines. Central, corner Union st., Worcester, Mass.
WITHERBY RUGG & RICHARDSON.

STENCIL DIES For cutting business Stencils, all sizes. Also complete OUTFITS for Clothing Stencils and Key Checks, with which young men are making from $5 to $20 a day. Send for catalogue and samples to S. M. SPENCER, 117 Hanover St., Boston Mass.

WHALEN TURBINE. No risks to purchaser. Pamphlet sent free. SETH WHALEN, Ballston Spa, N. Y.

Milling Machines.

Of all styles and sizes, from 600 to 10,000 lbs. Universal, Plain, Index, Gear and Cam Cutting. Mill Grinders. Mills made to order. Index Plates drilled. BRAINARD MILLING MACHINE CO., 131 Milk St., Boston. Works at Hyde Park, Mass.

WROUGHT IRON BEAMS & GIRDERS

THE Union Iron Mills, Pittsburgh, Pa. The attention of Engineers and Architects is called to our improved Wrought-iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided, we are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithograph address Carnegie, Kloman & Co, Union Iron Mills, Pittsburgh, Pa.

$5 TO $20 per day at home. Terms Free. Address GEO. STINSON & Co., Portland, Maine.

BOILERS AND PIPES COVERED

With "ASBESTOS FELTING:" saves twenty-five per cent. in fuel. Send for circulars.

ASBESTOS FELTING COMPANY,

Nos. 316, 318, 320, and 322 Front Street, New York. ☞ Asbestos in all quantities and qualities for sale.

BLAKE'S PATENT

Stone and Ore Breaker

Crushes all hard and brittle substances to **any required size.** Also, any kind of STONE for ROADS and for CONCRETE, &c. Address BLAKE CRUSHER CO., New Haven, Conn.

ADVERTISERS! Send twenty-five cents to GEO. P. ROWELL & CO., 41 Park Row, New York, for their *Pamphlet of one hundred pages*, containing lists of 3,000 newspapers, and estimates showing cost of advertising.

THE CHAMPION SILVER-STEEL SPRING MATTRESS, now greatly improved, has been before the public for several years, and continues to occupy its unrivalled position in the trade, as the BEST BED ever produced. It presents the rich and elegant appearance of silver, and is the softest, easiest, cheapest, and most durable Spring Bed in market. Wholly composed of tenacious tempered steel springs, so united that the pressure is equally distributed. Easily lifted, turned, or rolled up. Both sides alike. No frame, no wooden slats, no tow stuffing, no straps. May be used on floor without bedstead. No under bed required. Needs only half the thickness of hair mattress. More springs for your money in this bed than in any other. Unequalled for hotels. Any sizes made to order. Send for pictorial circular. Retail price of double bed, $13. Shipped, by single bed or quantity, to all parts of the world. Liberal discount to the trade. Sold by leading dealers in all parts of the country. Refer to Phelps, Doremus & Corbett, J. T. Allen & Co., New York, Gould & Co., Philadelphia, Pa., Gilbert & Sons, Norwich, Conn, Bowditch & Co., New Haven, Conn., and many others. CHAMPION SPRING MATTRESS CO., Makers, 246 Canal St., near Broadway, New York.



WEAVER'S
COMBINED CIRCULAR & SCROLL SAWING, BORING, PLANING, AND SURFACE MOULDING MACHINES.

They can be driven by hand, when other motive power is not available. Hundreds are being operated so. Manufactured at the "GREENWICH MACHINE WORKS," Greenwich, Washington Co., N. Y.

THE PRATT & WHITNEY CO., Hartford, Conn., are prepared to furnish, from their factory direct, or through their agencies at 25 Park Place, New York, 186 W. 2d St., Cincinnati, O., and 258 So. Canal St., Chicago, Ill., Iron Working Machinery for machine and railway shops, sewing machine and gun factories, and for special purposes, including drop and trip hammers, blacksmith shears and iron shop cranes of thorough construction, with full equipment of the best modern attachments. Enquiries for description and prices are solicited.

WEEK'S DOINGS IN WALL STREET. Explains stock operations on small capital without risk. Copy sent free. TUMBRIDGE & Co., 2 Wall st., N. Y.

$70 A WEEK TO AGENTS—Sure. Four new Patents. J. D. NESBITT, Foxboro', Mass

---

The Toll-Gate! Prize Picture sent free! An ingenious gem! 50 objects to find! Address, with stamp, E. C. ABBEY Buffalo N.Y

Small Tools of all kinds; also GEAR WHEELS, parts of MODELS, and materials of all kinds. Castings of Small Lathes, Engines, Slide Rests, &c. Catalogues free. GOODNOW & WIGHTMAN, 23 Cornhill, Boston, Mass.

MACHINERY.

WOOD AND IRON WORKING,
Specialties from new and improved patterns.
Planing and Matching Machines, Rotary Bed, Panel Buzz and Daniels Planers, Saw Benches, Band Saws.
BUSS & BRADLEY, 59 Sudbury St., Boston, Mass.

NEXT JULY, A WELL KNOWN FIRM of Engineers and Machinery Agents, with large connections at home and abroad, will open a ground-floor Warehouse, having windows fronting Queen Victoria Street and Cannon Street, City, London, England. The firm is prepared to accept the agency for special machinery, tools, etc., and to exhibit a choice selection of these and of working models. Advertizers' travelers canvass Great Britain and the whole of Europe. For terms, apply to W. P., Box 773 New York City.

PAGE'S Water Flame Coal Lime Kiln, with coal or wood. No 1 Soft White Lime or Cement with use of water. C. D. PAGE, Patentee, Rochester, N.Y

GREAT BARGAIN.

The property of the Yale Iron Works, consisting of one machine shop 60x150 ft., Basement, two floors and attic, with new engine and boiler, Shafting, Tools, etc. all in running order, suitable for manufacturing Engines, Tools, &c. Also one Foundry Building 58½ ft. x150 ft., with two Cupolas, crane, flasks, scales, and everything complete for doing a large iron foundry business. The buildings are Brick situated on the corners of Chapel St., *the* business Street of the city. The buildings will be sold separate or together, with or without the machinery. Also, large assortment of engines and tools ready for delivery. All things considered, this is a chance of a lifetime for a most profitable investment.
New Haven, Conn. H. B. BIGELOW, Assignee.

R. BALL & CO.,

WOOD WORKING MACHINERY.

For Planing Mills, Car Shops, Sash, Blind and Door Makers, &c., &c. Send for Illustrated Catalogue and price list. Factory, at Worcester, Mass. Salesroom, at 121 Chambers & 103 Reade Sts., New York.

WOOD WORKING MACHINERY



MOLDING, MORTISING
TENONING & SHAPING
MACHINES;
BAND SAWS,
SCROLL SAWS
Planing & Matching
MACHINES, &c.,
For RAILROAD, CAR, and AGRICULTURAL SHOPS, &c.,
☞ Superior to any in use.

J. A. FAY & CO.
CINCINNATI, Ohio.

P. BLAISDELL & CO.,

Worcester, Mass.,

Manufacturers of the Blaisdell Patent Upright Drills and other first-class Machinists' Tools.

NEW & IMPROVED PATTERNS.—MACHINISTS' TOOLS—all sizes—at low prices. E. GOULD, 97 to 113 N. J. R. R. Ave., Newark, N. J.



PATENT PARALLEL

Machinist's Vise,

MANUFACTURED BY

HARRISBURG FOUNDRY AND MACHINE COMPANY.
Harrisburg, Pa.

☞ *Send for Circular and Price List.*

Anarew's Patents.

Noiseless, Friction Grooved, or Geared Hoisters, suited to every want.
Safety Store Elevators. Prevent Accident, if Rope, Belt, and Engine break.
Smoke-Burning Safety Boilers.
Oscillating Engines, Double and Single, 1-2 100-Horse power.
Centrifugal Pumps, 100 to 100,000 Gallons per Minute, Best Pumps in the World, pass Mud, Sand, Gravel, Coal, Grain, etc., without injury.
All Light, Simple, Durable, and Economical. Send for Circulars.
WM. D. ANDREWS & BRO.,
414 Water Street, New York.

$180 EACH WEEK to active AGENTS. Something new and reliable. Write at once.
COWGILL & CO., Kalamazoo, Michigan.



Superior to any modification of the trip hammer. Simple, Efficient and Cheap.

☞ Send for Circulars and price.

Address

W. L. Chase & Co.,

95 & 97 Liberty St.,
New York

PATENT

Planing and Matching

and Molding Machines, Gray & Wood's Planers, Self-oiling Saw Arbors, and other wood working machinery.
S. A. WOODS MACHINE CO., { 91 Liberty st., N. Y.
Send for Circulars, etc. { 67 Sudbury st., Boston

RICHARDSON, MERIAM & CO. Manufacturers of the latest improved Patent Daniels' and Woodworth Planing Machines, Matching, Sash and molding, Tenoning, Mortising, Boring, Shaping, Vertical, and Circular Re-sawing Machines, Saw Mills, Saw Arbors, Scroll Saws, Railway, Cut-off, and Rip-saw Machines, Spoke and Wood Turning Lathes, and various other kinds of Wood-working Machinery. Catalogues and price lists sent on application. Manufactory, Worcester, Mass. Warehouse 107 Liberty st. New York. 17

MACHINERY, NEW and 2d-HAND.—Send for Circular. CHAS. PLACE & CO. 60 Vesey st., New York.

WOODWORTH SURFACE PLANERS, $125. Planers and Matchers, $350. S. C. HILLS, 51 Courtlandt street New York.

LATHE & MORSE TOOL CO.,
Worcester, Mass., Manufacturers of

MACHINISTS' TOOLS

Lathes, Planers, Drills, &c., &c.

PIPE FELTING.

CHEAPEST, most DURABLE and effective covering known. Encased in Galvanized Iron, ready for immediate application. No skilled labor required. Can be removed and used again. Send for Circular.
VEGETABLE FELTING COMPANY,
73 Beekman St., New York

Post Paid 25c. WENDELL'S DOOR STOP 53 N. 10th St., Philadelphia.

KING PATENT CASE HARDENING Iron converts the outside into Steel—can be annealed and tempered as other steel. For rights, address R. T. KING, Pana, Ill

---

© 1874 SCIENTIFIC AMERICAN, INC.

Advertisements.

Back Page - - - - - - - $1.00 a line.
Inside Page - - - - - - - 75 cents a line.

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

BORING AND TURNING MILLS.

PATENTED APRIL 11, 1871.

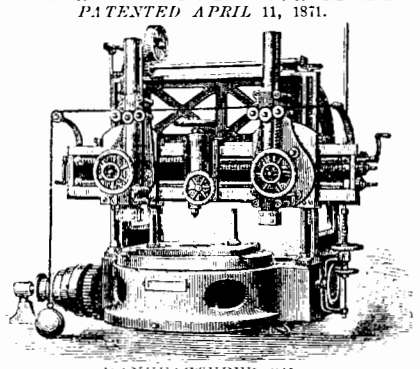

MANUFACTURED BY

NILES TOOL WORKS
HAMILTON, OHIO.

FOR

Machinists' TOOLS,

OF ALL KINDS,

ADDRESS

N.Y. Steam Engine Co.
98 Chambers St.
NEW YORK

FOR SALE—Patent Wash Boiler. Best in use, plain and easily made, and gives satisfaction. Address, with stamp, W. J. THOMAS, Frederick, Md.

SCROLL SAWS—Best in the market. First premium at the American Institute Fair. Send for Circular to S. D. HOWE, 90 Fulton St., New York.



Universal Hand Planing Machine, a labor-saving invention, attached to any vise, to bench with stand and chuck, or to work itself, set to work in any direction in a moment. Up and down feed to Tool; reversible self crossfeed. Quickly saves its cost in hands of all metal working mechanics. JACOB E. SUITTERLIN, mf'r, 60 Duane St., N. Y.

GEORGE BARNES & CO.,

Manufacturers, Syracuse, N. Y.

DAMPER REGULATORS **BEST** AND LEVER GAGE COCKS.
MURRILL & KEIZER, 44 Holliday St., Balt.

SEND FOR
Circulars descriptive of the
GOODENOUGH
Improved Horseshoe.

All fitted for use. No fires required. Every Breeder, every Farmer, every Horse Owner own Farrier.

Box 3044, P. O. New York.

OFFICES:
34 & 36 Elizabeth Street.

Todd & Rafferty Machine Co.

MANUFACTURERS OF
The celebrated Greene Variable Cut-Off Engine; Lowe's Patent Tubular and Flue Boilers; Plain Slide Valve Stationary, Hoisting, and Portable Engines. Boilers of all kinds. Steam Pumps, Mill Gearing, Shafting, &c.; Silk, Tow, Oakum, Bagging, Rope, Flax, and Hemp Machinery. Agents for the New Haven Manufacturing Co.'s Machinists' Tools; for Judson's Governors and Stop-Valves: Sturtevant Blowers; and Differential Pulley-Blocks. WAREROOMS, 10 BARCLAY ST., NEW YORK. WORKS, PATERSON, NEW JERSEY.

SHINGLE & BARREL MACHINERY.

EVART'S IMP. HEADING AND SHINGLE SAW, STAVE CUTTERS, JOINTERS, EQUALIZERS, AND HEADING TURNERS.

BAILEY GAUGE LATHE—For turning all kinds handles and Cabinet work. Simplest and best in use. We manufacture a full line of Wood and Iron Working Machinery, Steam Engines, &c. Address
T. R. BAILEY & VAIL, Lockport, N. Y.

IMPORTANT FOR ALL LARGE CORPORATIONS AND MANUFACTURING CONCERNS.—**Buerk's Watchman's Time Detector,** capable of controlling, with unerring accuracy, the motion of a watchman or patrolman, as the same reaches different stations of his beat. Send for a Circular.
J. E. BUERK, P. O. Box 1,057, Boston, Mass.
N. B.—This detector is covered by two U. S. Patents. Parties using or selling these instruments without authority from me will be dealt with according to law.

SAWS.

EMERSON'S PATENT INSERTED TOOTHED CLIPPER, expressly for heavy feed, will saw 50,000 feet of lumber in 10 hours.

The Patent Flange Tooth is the cheapest Inserted Toothed Saw ever made. Has *been in use more* than four years, and gives perfect satisfaction.

N. B.—The Patent Adjustable Swage given with each INSERTED TOOTHED SAW.

Also, our *Patent* Ready Gummed and Solid Saws of all kinds.



THE PATENT PLANER SAWS are superseding all others. 500 teeth given with each saw that will cut 500,000 feet of lumber without sharpening. The teeth are now made by a new process, every one perfect. This Saw will cut more and better lumber than any other saw in the world.

All Goods Warranted of Superior Quality.

☞ For Circulars and Price List, address **EMERSON, FORD & CO., Beaver Falls, Pa.**

SAWS.

EMERSON'S PATENT ADJUSTABLE SAW SWAGE, lengthens the tooth and spreads it at the same time.

Sent prepaid to any part of the United States or Canada, on receipt of Price, $5.00, or sent C. O. D.

EXTRA THIN CIRCULAR SAWS. For Circular Saw Mills.

With Cast Steel or Gun Metal Collars, for resawing, veneer saws, Shingles, Clapboards, Looking Glass, and Picture Frame Backs, and all kinds of thin lumber.

SUPER-HEATERS

Save fuel, and supply DRY steam. Attached to boilers or set in separate furnaces. H. W. BULKLEY, Engineer, 98 Liberty St., New York.

Pyrometers. For testing Ovens, Boiler flues, Blast furnaces Super-heated Steam, Oils Stills, &c.
Address HENRY W. BULKLEY, 98 Liberty St., New York

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty St., New York. Wheels and Rope for conveying power long distances. Send for Circular.

HOUSTON'S PATENT
TURBINE WATER WHEEL.
Simplest, Strongest, Cheapest, Best.

In the test at Holyoke, in 1872, the Houston gave the **highest percentage ever shown** in a reliable test and the **highest average results ever obtained.** In practical use it is everywhere demonstrating its superiority over all others. Emerson's full report furnished on application. Send for Circular.
MERRILL & HOUSTON IRON WORKS, Beloit, Wisconsin

PORTLAND CEMENT

A Practical Treatise on Cement furnished FREE.
S. L. Merchant & Co. 76 South St., New York.

Grant's Lightning Screw Plate.

The only screw plate in the world that makes perfect threads—equal to lathe work—at a single cut. Will do at least five times as much as any other. Also a large variety of Bolt Threading Machines of novel and improved construction. Fine friction clutches.
WILEY & RUSSELL, Greenfield, Mass.

J. HENRY HALL & CO., 20 Cortlandt St., N. Y. City.
THE PULSOMETER.

The simplest, most durable and effective STEAM PUMP now in use. Will pump gritty or muddy water without wear or injury to its parts. It cannot get out of order.

Branch Depots:
11 Pemberton Square, Boston, Mass.
1327 Market St., Philadelphia, Pa.
59 Wells Street, Chicago, Ill.
South Western Exposition, New Orleans.
811 & 813 North Second St., St. Louis, Mo.

J. G. ROGERS & CO., Madison, Ind., are the original introducers of **TANNATE OF SODA** for cleaning boilers. Their preparation of this Salt was patented May 21st, 1871. It success has led to many fraudulent imitations against which the public is warned. *Their T. S. is the solid Salt itself—no dilution.* ONLY 1 TO 2 OUNCES DAILY REQUIRED. Price 35c. a lb. Send for book. References: Remington & Sons, Ilion N. Y.; Root Steam Engine Co., N. Y.; Owens, Lane Dyer & Co., Hamilton, O.; Oneida Community, Oneid., N. Y.

NOYE'S
Mill Furnishing Works

are the largest in the United States. They make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys and Gearing, specially adapted to flour mills. Send for catalogue.
J. T. NOYE & SON, Buffalo N. Y.



AGENTS WANTED IN EVERY TOWN.
N. Y. SLATE ROOFING CO.,
Office, 6 Cedar Street, N. Y.

Protect Your Buildings

WITH GENUINE

FIRE AND WATER PROOF PAINT.

No tar is used in this composition, one coat of which is equal to six of ordinary paint, and **STOPS EVERY LEAK.** Filling up all holes in shingle, felt, tin or iron roofs; never cracks nor scales off; and is only 80 cents a gallon, **ready for use,** with a liberal discount to the trade Two gallons will cover 100 sq. ft. of shingles, or over 400 o tin roof.

☞ *Send, for testimonials* and *full* particulars, to P. O Box 1,761, New York.

Samples from B. E. Hale & Co., 56 and 58 Park Place, N. Y. Sole Agents for Eastern States.

BUILDING PAPER!

FOR SHEATHING, ROOFING, DEAFENING, CARPET LINING, AND PLASTERING

Samples from Rock River Paper Company, Chicago, Ills.

TILES,

PLAIN, ENCAUSTIC, AND MAJOLICA.
ANDERSON, MERCHANT & CO., 24 Pearl St., N. Y.
☞ Circular furnished free.

STEAM GOVERNOR

WARRANTED BEST IN USE.
ADDRESS HUNTOON GOVERNOR CO. LAWRENCE MASS.

FOR STEEL STAMPS, Pattern Letters, Burning Brands, &c., address "NEW YORK STENCIL WORKS," 87 Nassau St., N. Y. ☞ P. O. Box 5185.

STAUI-Z-SIS TOOLS

EXTRA HEAVY AND IMPROVED,
LUCIUS W. POND, MANUFACTURER
Worcester, Mass.
Warerooms, 98 Liberty Street, New York.
A. C. STEBBINS Agent.

And Shaped Diamond Carbon Points, indispensable for Turning Emery Wheels, Grindstones, also Trueing up hardened Steel and Paper Calender Rollers, &c. Address J. DICKINSON, Patentee, 64 Nassau St. N.Y.

TANNATE OF SODA *is not* Patented, *and cannot be* Patented. Thomas's Fluid Tannate of Soda *is a perfect Success* for removing scale from Steam Boilers, WITHOUT INJURING BOILER. It has removed Bushels of Scale from Single Boilers, thereby saving Tuns of Coal. It saves 20 times its cost in Fuel, and saves 20 times its cost in repairs of Boilers. Sold in Bbls. 500 lb., ½ Bbls. 250 lb., ¼ Bbls. 125 lb., at the low price of 10 cents per pound—less than one third price of other preparations, and superior to all others. Address orders to N. SPENCER THOMAS, Elmira, N. Y.

PORTLAND CEMENT,

From the best London Manufacturers. For sale by JAMES BRAND, 55 Cliff St., N. Y.
A Practical Treatise on Cement furnished for 25 cents.



THE "DANBURY"

Universal Drill Chuck

C. H. REID'S PATENT, AUGUST 12, 1873,

A success. Heartily endorsed by all using it. Stronger and **more durable** than any other. Holds drills from 0 to ⅝, full size, and will hold much larger by turning down shanks to ⅝. Is operated quickly and always easily; cannot clog, **set,** or in any way **get out of order.** Has now been a year in constant use, working perfectly. All are sold with full warrant, to be returned if not satisfactory. F. A. HULL & CO., Manufacturers, Danbury, Ct Send for Illustrated Descriptive Circular.

American Saw Co.

Removes its Business Office, May 1st, 1874, to
TRENTON N. J.

Barnes' Foot & Steam Power Scroll Saw.

For the entire range of Scroll Sawing, from the Wall to the Cornice Bracket, 3 in. thick. Every Woodworker should have one. Four years in market—thousands using them.

Persons out of work, or that have spare time, can earn with one of these foot power machines from 40 to 80 cts. per hour. It is a pleasure to run one.—Say where you saw this, and send for full description to W. F. & J. BARNES, Rockford, Ill.; R. C. BARNES & BRO., 68 Park Place, N.Y

ENCAUSTIC TILES

for floors. Send for pattern sheets.
MILLER & COATES, 279 Pearl St., New York.

IRON PLANERS,

ENGINE LATHES, DRILLS, &c. Send for Price List.
NEW HAVEN MANUFACTURING CO.,
New Haven, Conn.

A LARGE ASSORTMENT OF
Spy Glasses.

Catalogue sent on receipt of Ten Cents.
W. Y. M'ALLISTER,
Chestnut St., below Eighth, Philadelphia Pa.

SCHAEFFER & BUDENBERG, Magdeburg, Germany Steam Gauges, etc. W. HECKERMANN, 4 Cedar St., N.Y.

IMPROVED 1874.
DOUBLE ACTING
BUCKET-PLUNGER
SteamPumps

ALWAYS RELIABLE.
VALLEY MACHINE COMPANY,
Easthampton, Mass.

THE TANITE COMPANY
Emery Wheels — TANITE — Emery Grinders
TRADE MARK
STROUDSBURG, PA. — MONROE, CO., PA.

R. A. Vervalen's Brick Machines,

Made at Haverstraw, Rockland Co., N. Y. Making nine tenths of all the brick used in the State. Send for circular.



THE AMERICAN TWIST DRILL CO., Woonsocket, R. I., are now the sole owners and manufacturers of the celebrated DIAMOND SOLID EMERY WHEELS. ☞ Illustrated Catalogue of Emery Wheels, Machinery, and Tools FREE.

$200 A MONTH TO AGENTS to sell the IMPROVED "HOME SHUTTLE" SEWING MACHINE, the only practical, low-priced "Lock Stitch" Sewing Machine ever invented. Address JOHNSON, CLARK & CO., Boston, Mass.; New York City; Pittsburgh, Pa.; Chicago, Ill.; Louisville, Ky., or St. Louis, Mo.

Working Models

And Experimental Machinery, Metal, or Wood, made to order by J. F. WERNER, 52 Center st., N. Y.

THREE PLY ROOFING,
In Use Ten Years.
A good article, well recommended and suitable for either steep or flat roofs. Send for Circular and Samples. MICA ROOFING CO., 73 Maiden Lane, New York

SAMPLES OF MACHINES, TOOLS, and IMPLEMENTS, received, exhibited, and orders taken. A. M. PAXTON & CO., Vicksburg, Miss.

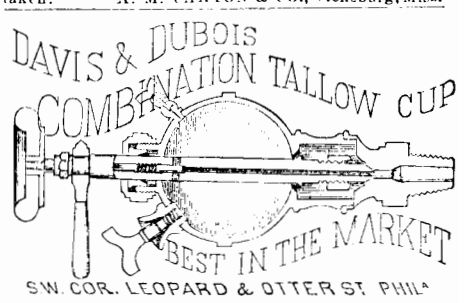

WIRE ROPE.

John W. Mason & Co., 43 Broadway, New York.

ALL KINDS OF IRON AND STEEL DROP FORGINGS made to order. NEW ENGLAND MOTOR AND MOWER CO., Danbury, Conn

PATENTS

The publishers of the SCIENTIFIC AMERICAN have acted as solicitors of patents in the United States and foreign countries for more than a quarter of a century. More than FIFTY THOUSAND inventors have availed themselves of their services. All patents secured through this agency receive a special notice in the SCIENTIFIC AMERICAN, which frequently attracts purchasers for the patent.

Inventions examined, and advice as to patentability free

Patents obtained in the best manner, and with as little delay as possible.

Caveats prepared from either model or drawings, and filed in the Patent Office at short notice.

Special examinations as to the patentability of inventions made, at the Patent Office, on receipt of model or drawing and description; cost for this search and report, $5.

Trade Marks.—The necessary papers for securing protection to manufacturers and merchants in this country and abroad are prepared at this office.

Design Patents, for protecting artists and designers of any new ornamental work, are quickly and cheaply obtained through this office.

Copyrights obtained.

Foreign Patents are solicited in all countries where patent laws exist. Pamphlets, containing the cost and full particulars, mailed on application.

Canada Patents.—Canada is one of the best countries for patents. The cost depends upon the length of time for which a patent is desired. Full particulars by mail on application.

We shall be happy to confer with inventors, examine their models and drawings, and advise with them as to obtaining patents without consultation fee. Every kind of information pertaining to patents, at home or abroad cheerfully given.

Send for pamphlet, 110 pages, containing laws and directions for obtaining patents. Address

MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, N. Y.
BRANCH OFFICE—**Corner F and 7th Streets,** Washington, D. C.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Philadelphia, and 59 Gold St., New York.

© 1874 SCIENTIFIC AMERICAN, INC.